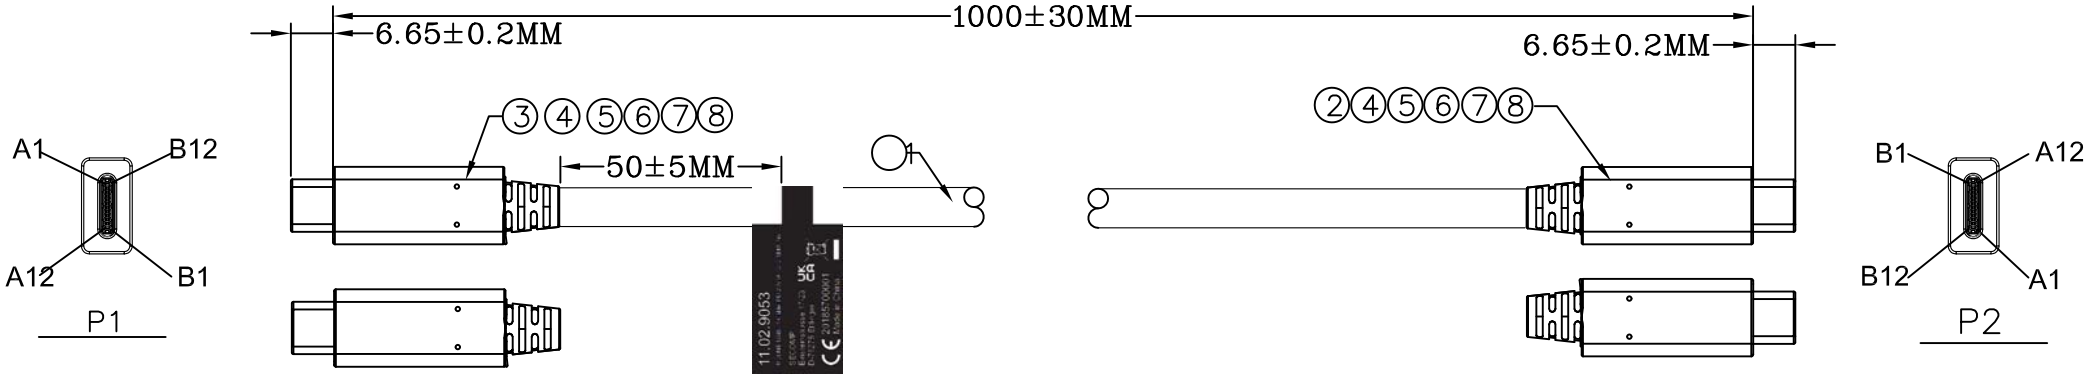

TEST：

1、100% Short Open Miss Test；
2、Contact resistance：3Ω (Max)
3、Speed :Above 500MB/S

Note: According to the current specifications of USB.org the new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (5 Gbit/s) (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2) (10 Gbit/s)

Pin Assignment:

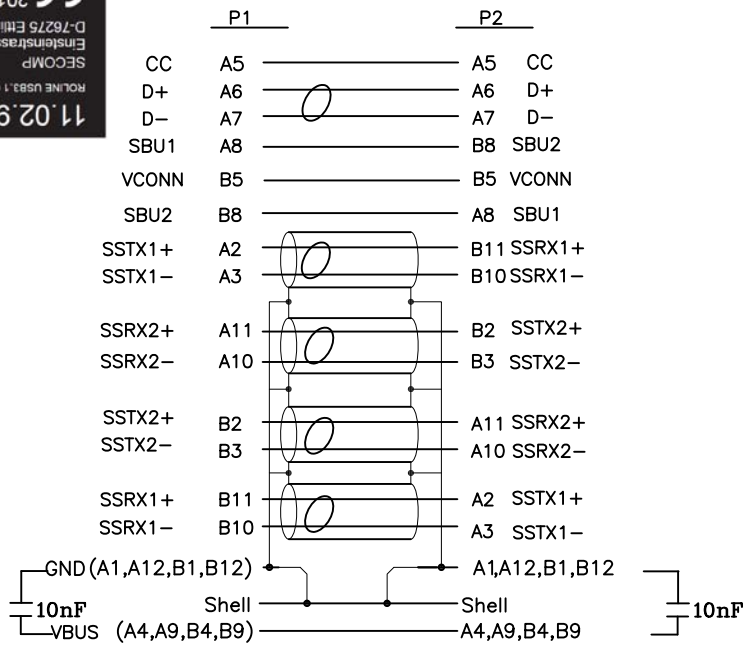

NO	ITEM	DESCRIPTION	Q'TY	UNIT
8		SEC(RCL) Label~125*30MM~Marking: 11.02.9053…20185700001…	1	pcs
7		USB TYPE C~Metal Shell 2	2	pcs
6		USB TYPE C~Metal Shell 1	2	pcs
5		Outside Molding :PVC~45P~Black	12	g
4		Inside Molding:Polyamide Resin	1	g
3		Type C Connector~PCB+10NF	1	pcs
2		Type C Connector~PCB+10NF~IC	1	pcs
1		USB3.2~[30AWG(7/0.105TC)+EAM]*4P+[32AWG(7/0.08TC)+AM]*1P+34AWG(7/0.06TC)*1C+26AWG(19/0.10TC)*2C+[34AWG(7/0.06TC)+A]*3C+A2EB(24/11/0.06TC 90%)OD:5.2MM~Black~Marking:E342987 兄 AWM STYLE 2725 80℃ 30V VW-1	1.02	M

	TOLERANCE INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY
CHECK BY
APPD BY

SECOMP

TITLE: ROLINE USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2) (10 Gbit/s) CABLE, PD 20V5A, C-C, M/M, 1M BLACK

CUSTOMER :	SEC(RCL)
CUSTOMER P/N :	11.02.9053
SCALE	NONE
UNIT	MM
DATE	22.04.22
DRAWING NO.:	
REV.	A1
	1/1