



RoHS Compliant

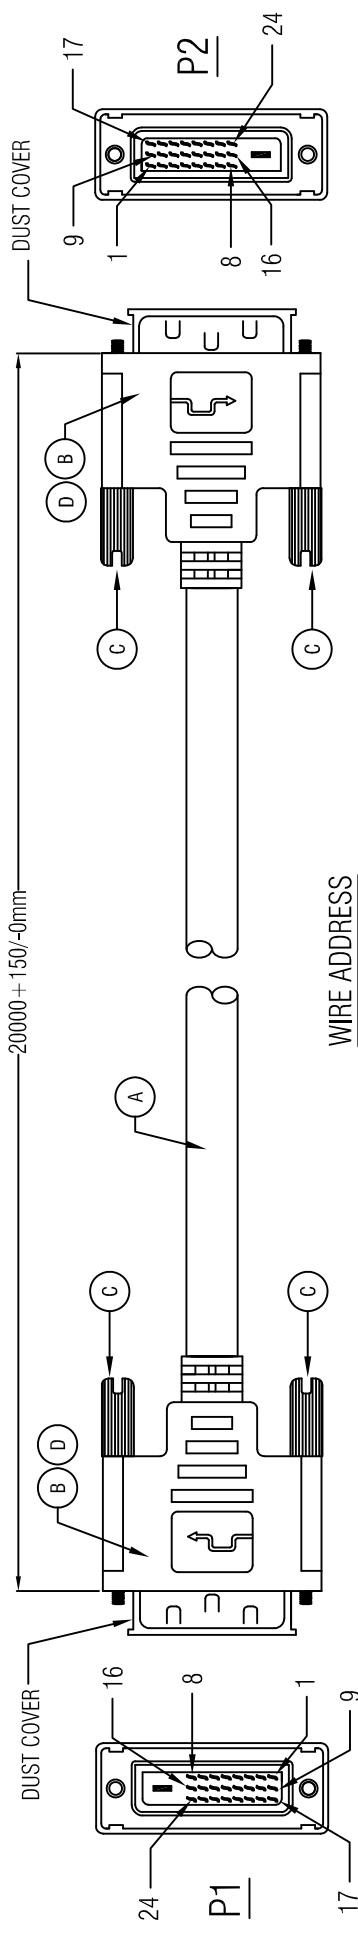

WIRE ADDRESS

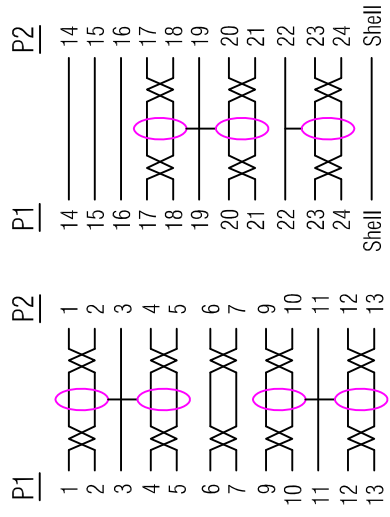

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:10Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.
- 5.Real Test Passed 1920*1080P 60HZ.
- 6.Real Test Not Twinkling,Double Vision and Decolor.

D	45P PVC BLACK	G	ROLINE DVI Dual Link (24+1)Cable, 20m, black
C	#4-40UNC φ 2.3*48mm BLACK INSULATOR	4	PCS
B	DVI24+1P MALE (Black Insulator, Nickel Plated)	2	PCS
A	UL20276,(24#*1P+D+FAM)*7PCS+24#*1P+24#*3C,AL+MYLAR+B,0D=12mm BLACK PVC JACKET.	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
		4	F16
		Sample NO.	
		Drawings of 1 (1)	Unit:mm
		Proportion: 1:1	A4

