




Datenblatt - Fiche technique - Data sheet


11.04.5883

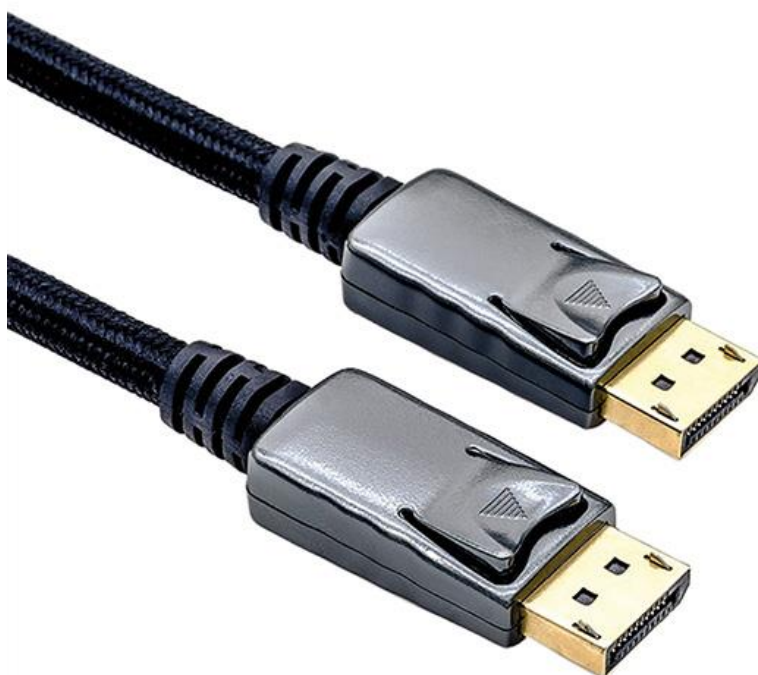

ROLINE DisplayPort Kabel, DP-DP, v1.2, ST - ST, schwarz-metallic, 5,0 m

ROLINE Câble DisplayPort DP-DP, v1.2, M - M, 5,0 m

ROLINE DisplayPort Cable, DP-DP, v1.2, M/M, 5.0 m

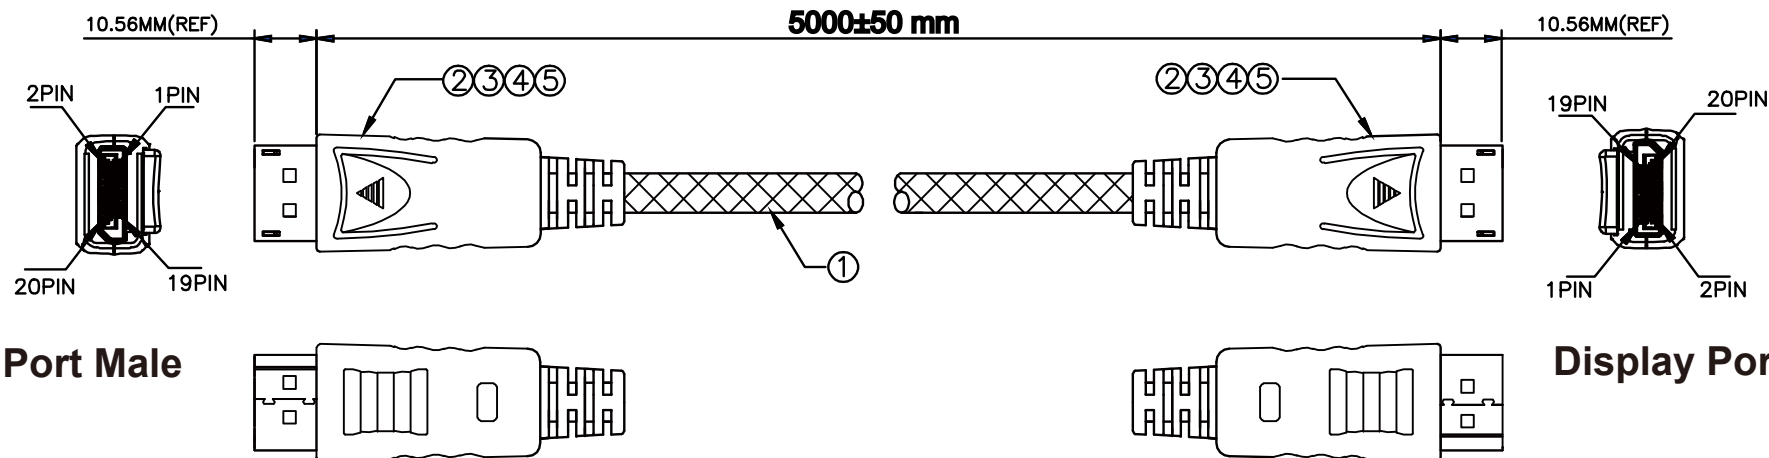


Electrical Test :

1. 100% Test (Open, Short, Miss Wire)
2. Contact Resistance: 2 ohm Max.
3. Insulation Resistance: 10M ohm Min.
4. Hi-Pot: 300V DC/10ms, 5. Bending Test: 90D 2-3Times

Specification :

- | | | |
|---|-----------------|---|
| 1 | Cable | UL20276, (28AWG*1PR+D+AL/MY)*5+28AWG*4C+AL/MY+ BD, OD: 7.3MM, Jacket: Black with Cotton Braid |
| 2 | Connector | Display Port Male, Pin: Gold Plated 3u", Insulator: Black, Shell: Gold Plated 1u" |
| 3 | Shell | For Display Port, ABS, Color: Gray |
| 4 | Outside Molding | PVC: 45P, Color: Black |
| 5 | Inside Molding | PE |

Pin Assignment

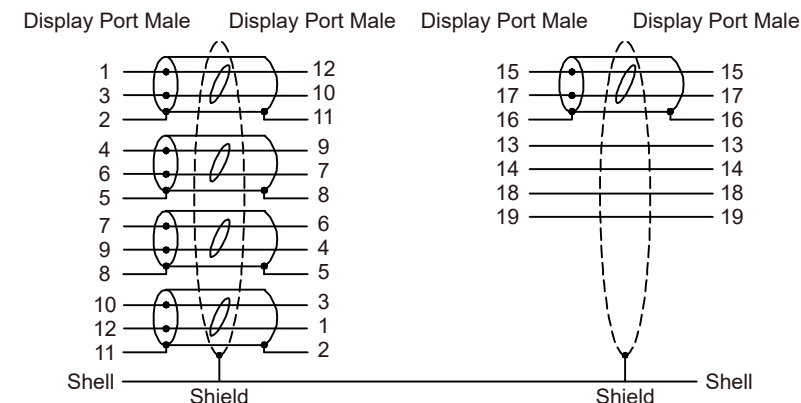

Rev.	Date	Contents of Change	Designer	Tol± Range					v				Approve	Check	Draw	Design	Product Name	ROLINE SILVER DisplayPort Cable v1.2, M/M				
					Pla	Met	Ins	Por	Cab	Pac	Gas	Dis					Drawing Date	Product No.	11.04.5883	R00		
△				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2	Allen	Allen		Philip	2017/3/27					
△				6~30	0.1	0.1	.15	.25	1	1	0.5	.25										
△				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3										
△				80~180	.15	.15	.25	0.3	2	2	1	.45										
△				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6										
△				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1		Scale	1 : 1	Unit	mm	SECOMP				

SECOMP