


V. Application:

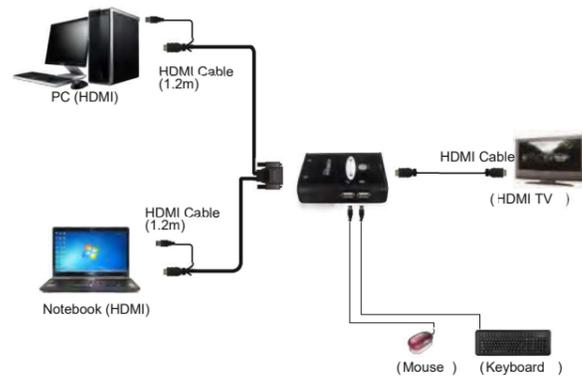

VI. Select Method:

Keyboard Hot Key:

Hot Key Definition	
Scroll + Scroll + 1	Switch to PC1
Scroll + Scroll + 2	Switch to PC2
Scroll + Scroll + → or ↓	Switch to Next PC
Scroll + Scroll + ← or ↑	Switch to Previous PC
Scroll + Scroll + S	Auto-scan mode every 10 second

- After shut down each PC, please switch to the other one before the power shut down.
- The right side port only for USB Keyboard, the left side port only for USB Mouse.

Note: When you first switch in a computer, you should wait for the mouse and keyboard at both activated, Do Not use the port-switching button to switch the port before mouse and keyboard are both activated.

KVM SWITCH(HDMI)

User Manual



I. Description

Mini KVM Switch is an assembling redesigned SOHO KVM Switch, you can share your monitor, keyboard, and mouse with up to USB computers.


II. Features

- ◆ No external power supply
- ◆ No drivers or firmware required and cross-platform.
- ◆ Supports Windows, Linux, Mac, and Sun.
- ◆ Supports USB Keyboard and Mouse.
- ◆ Supports high resolution, HDMI connection can supports up to 4K2K

III. Specification:

Model	2 Port HDMI KVM Switch
Input Connector	DB-44 PIN x 1 / USB Type A x 2
Output Connector	HDMI x 1
Bandwidth	340MHz / 10.2Gbps
Max Resolution	4K2K
Transmission Distance	Input: 7 feet / Output: 50 feet (24AWG Cable)
Operating Temperature	0~40°C
Storage Temperature	-5~70°C
Humidity	0~90% Non-condensing
Housing	Plastic
Dimensions (mm)	100 x 75 x 23

IV. Device Overview

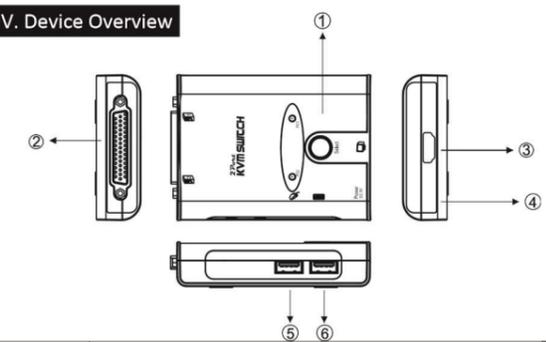

Number	Description	Function
1	Push Button	Switch PC
2	DB-44M Connector	Connect to PC
3	HDMI Output	Connect to Monitor
4	2.5φ Power Jack	Connect to Adapter
5	USB 1.1 Connector	Connect to Mouse
6	USB 1.1 Connector	Connect to Keyboard