



Datenblatt - Fiche technique - Data sheet


11.99.5635



VALUE DisplayPort Kabel, DP ST - Mini DP ST, 2,0 m


VALUE Câble DisplayPort DP M - Mini DP M, 2,0 m

VALUE DisplayPort Cable, DP - Mini DP, M/M, 2.0 m

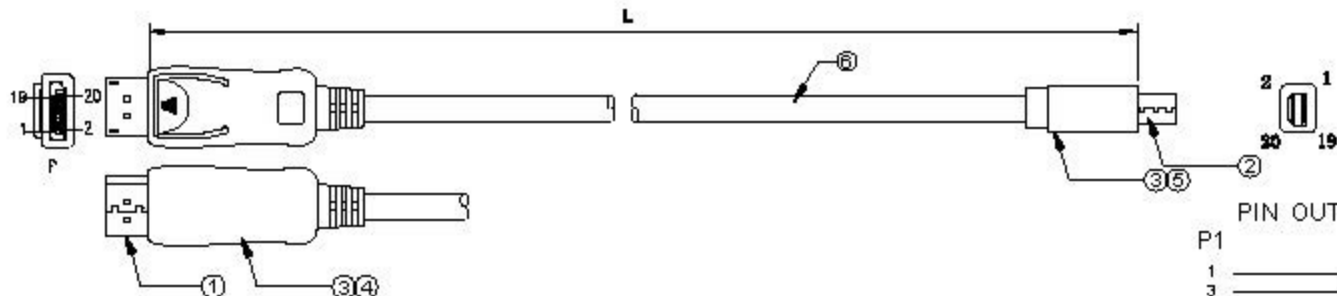

PIN OUT

P1	P2	
1	11	
3	12	
5	10	
7	8	
9	9	
11	7	
13	5	
15	6	
17	4	
19	19	
2	18	
4	13	
6	14	
8	2	
10	3	
12	1	
14	16	
16	15	
18	17	
20 (no connection)	20	
SHELL	BRAID	SHELL

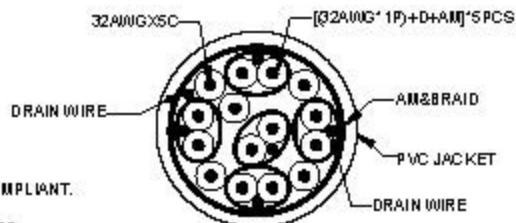**NOTE:****1. Electrical properties:**

1. ALL COMPONENTS ARE ROHS COMPLIANT.
2. 100% OPEN AND SHORT TEST.
3. CONDUCTOR RESISTANCE ≤ 3 OHMS
4. INSULATION RESISTANCE ≥ 10 MEGOHMS.
5. HI-POT: DC 200V/0.1S
6. PC TEST 4K2K30HZ PASS 1080P PASS

2. ROHS 2.0 and REACH**MATERIAL LIST****MODEL LIST**

Model	Length
11.99.5634-20	1000mm
11.99.5635-20	2000mm
11.99.5636-20	3000mm
11.99.5637-20	5000mm

No.	PART NAME	DESCRIPTION	QTY	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM
⑥	CABLE	[(1/0.20BC*2C+1/0.20BC*1C+AM)*5PCS+1/0.20BC*5C]+AM+D(1/0.25BC)+B(16/40.12ALM)+BLACK PVC(KKE75-5001-75) OD5.0MM COLOR:BLACK	L					
⑤	OUTER MOLD	BLACK PVC	1	SECOMP				
④	OUTER MOLD	BLACK ABS	1	DRAW No.		NAME	DP CABLE 4K2K 30Hz	
③	INNER MOLD	LD-PE	2	CUSTOMER		MAPE	TOLERANCE	
②	CONNECTOR	MINIDisplayPort MALE , GOLD PLATED PIN, Nickel PLATED SHELL	1	MODEL No.	11.99.563K-20		X ±1.00 X.X ±0.50	
①	CONNECTOR	DisplayPort MALE , GOLD PLATED PIN, Nickel PLATED SHELL	1					
No.	PART NAME	DESCRIPTION	QTY				PAGE	1/1