



Datenblatt - Fiche technique - Data sheet


11.99.8872



VALUE USB 3.0 Kabel, A ST - Micro A ST, 0,8m

VALUE USB 3.0 Câble, A M - Micro A M, 0,8m

VALUE USB 3.0 Cable, A - Micro A, M/M, 0.8 m

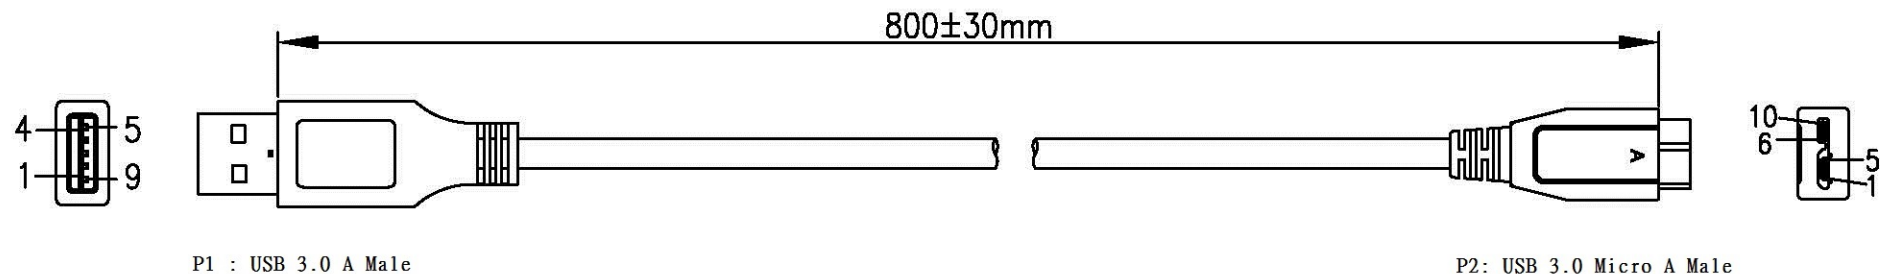

NOTES:

1. MATERIAL

1.1 CABLE: (7/0.12BC*1P+7/0.12BC+FAM)*2PCS+7/0.20TC*2C+7/0.12TC*1P+AM+7/0.12BC+128/0.12ALM+WHITE (KKE75-4010-75) PVC JACKET].

OD=ø5.5 ± 0.15MM.

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE

1.2 P1: USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PET INSULATION, GOLD FLASH CONTACTS, NICKEL PLATED SHELL.

1.3 P2: USB 3.0 MICRO A TYPE MALE: SOLDER TYPE, BLACK PET INSULATION, GOLD FLASH CONTACTS, NICKEL PLATED SHELL.


1.4 ALL HOOD: MOLDED WHITE (KKCS50-4010-85) PVC.

2. TESTING: 100% OPEN AND SHORT TEST.


3. RoHS & REACH COMPLIANT.


PIN OUT

AM MICRO AM

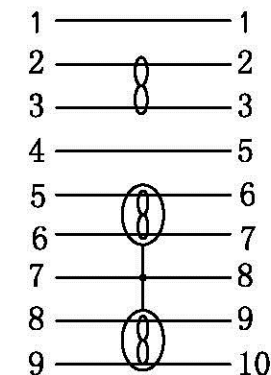

SHELL (BRAID+DRAIN) SHELL



			LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: ROTRONIC		rotronic		
01		2013-9-03	ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm					ITEM NO.
00		2013-8-22		VERSION: 01					DESC.
REV.	MODIFY DESCRIPTION	DATE			PAGE:	1/1			