


RoHS Compliant

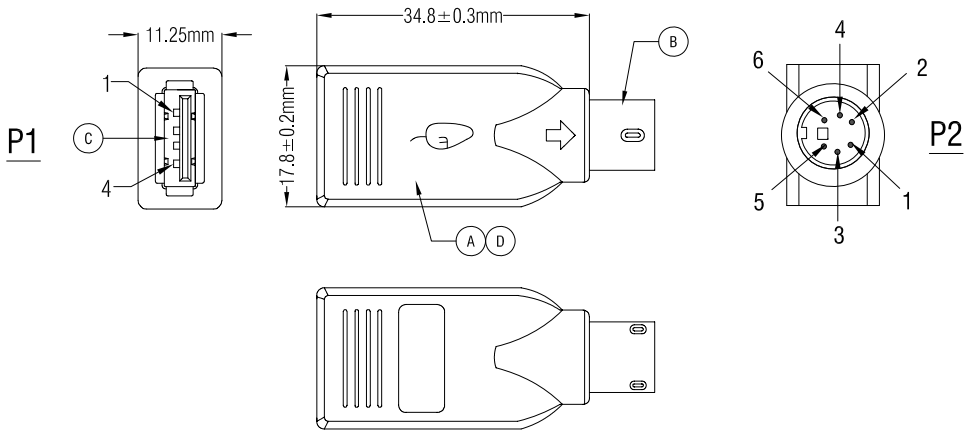

WIRE ADDRESS

P1	P1
1	4
2	1
3	5
4	3

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.

D	45P PVC GREEN		G	VALUE PS/2 to USB Adapter, Mouse, green		
C	MD6P MALE(Black Insulator,Nickel Plate)	1	PCS	Item	12.99.1072	
B	USB 2.0 A FEMALE(White Insulator,Nickel Plate)	1	PCS	Draw	Sam	Date: 2015.01.20
A	UL1007 28# WIRE PVC JACKET	5	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	BOM.NO:13505
1	2	4		Sample NO.	Drawings of 1 (2)	Proportion: 1:1 Unit(mm) A4

SECOMP