

# USB-C Multiport Dock

## UH3230

- The UH3230 USB-C Multiport Dock connects a USB-C embedded computer to up to 8 peripheral ports that include a USB-C, Gigabit LAN, DisplayPort with Multi-Stream Transport, HDMI, audio and three USB 3.1 Gen 1 ports – through a single USB-C cable. The UH3230 allows your laptop to quickly dock and perform like a desktop computer. This multiport dock also supports USB-C Power Delivery 2.0, which means the UH3230 can provide power to matched USB-C laptops with PD profile specifications of 20V/3A, 20V/1.8A, 12V/3A, and 5V/3A.

The UH3230 routes video from a source computer to a DisplayPort or HDMI monitor via single cable while maintaining the highest quality 4K resolution. The multiport dock supports dual monitors in mirror and extended mode at resolutions.\* This USB-C station provides a front panel USB 3.1 port for high speed data transfers and fast charging of portable devices. With the UH3230 there's no need to carry or reconnect multiple cables every time you return to your desk which means you can spend more time working or playing and less time concerned with setup. The UH3230 connects every peripheral device you ever wanted to transform your everyday USB-C or Thunderbolt™ 3 laptop into a more advanced desktop computer – in an instant.

\* Multi-Stream Transport is not supported by the Mac OS X, and only one additional video output can be utilized for extended desktop under the Mac OS.




## Features

- Connect up to 8 devices to a laptop through a single USB-C cable
- Supports HDMI 2.0 with 4K (UHD) resolutions
- Supports DisplayPort 1.2 with 4K (UHD) resolutions
- Analog audio line-in and line-out
- Gigabit LAN port
- Supports dual monitors in mirror and extended mode\*
- USB 3.1 Gen 1 front panel port supports Fast-Charging
- Supports USB Power Delivery 2.0 for charging a laptop via USB-C port; supported power profiles include 20V/3A, 20V/1.8A, 12V/3A, and 5V/3A.

\* Mac computers only support single-view output.

### Setup

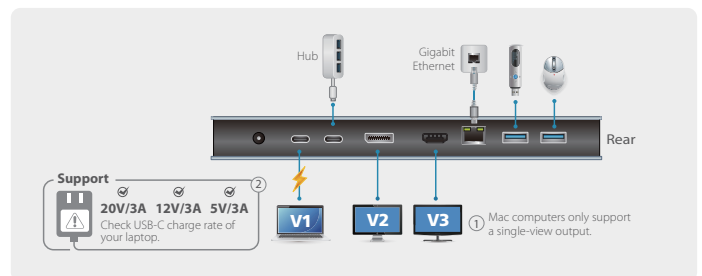

## Specifications

Function	UH3230
<b>Computer Connections</b>	1
<b>Connectors</b>	
Device	1 x USB-C Female (Black, Data only) 3 x USB3.1 Gen1 Type A Female (Blue)
Computer	1 x USB-C Female (Black)
Video Output	1 x Displayport Female (Black) 1 x HDMI Female (Black)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio Inputs	1 x 3.5mm Analog Audio Input (Black)
Audio Outputs	1 x 3.5mm Analog Audio Output (Black)
Power Jack	1
<b>LEDs</b>	
Power	1 (White)
Video Resolution	<b>Single View:</b> DisplayPort** - 3840 x 2160 @ 30 or HDMI - 3840 x 2160 @ 30 <b>Dual View:</b> DisplayPort 1** - 2048 x 1200 @ 60 HDMI 2 - 1920 x 1200 @ 60 **The UH3230 supports DP++ standard for using optional active/passive video adapter to convert DP signals to DVI/HDMI.
<b>Power</b>	
Consumption	DC 20V , 90W
<b>Package Contents</b>	1 x USB-C Cable
<b>Environmental</b>	
Operating Temperature	0° to 40° C
Storage Temperature	-20° to 60° C
Humidity	0 - 80% RH, Non-condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	0.574 kg
Dimensions (L x W x H)	20.00 x 9.10 x 2.20 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 08/2017 V1.0



© Copyright 2017 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.