

PRODUCT DATASHEET

NOXLITE LED HP FLOODLIGHT 40 W WT

NOXLITE LED HP FLOODLIGHT II | Outdoor LED flood- and spotlights



AREAS OF APPLICATION

- Driveways
- Garages
- Yards
- Pathway lighting
- Outdoor use (only roofed areas)

PRODUCT BENEFITS

- Quick installation
- Easy change of housing, even between two different wattages

PRODUCT FEATURES

- Efficient LED floodlight with high light output
- Lighting panel can be swivelled round
- Sensor function can be turned off via switch (manual luminaire switch-off required)
- Available in two housing colors
- Color temperature: 3,000 K
- Color rendering index R_a : > 80
- Type of protection: IP44
- Protection class: I
- Lifetime (L70/B50): up to 35,000 h



IP 44

IK 07



TECHNICAL DATA


Electrical data

Operating mode	ECG
Nominal wattage	40 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz

Photometrical data

Color temperature	3000 K
Luminous flux	3000 lm
Light color (designation)	Warm white
Color rendering index Ra	>80

Dimensions & weight



Length	211.0 mm
Width	171.0 mm
Height	229.0 mm
Product weight	1350.00 g


Colors & materials

Product color	White
----------------------	-------

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
----------------------------------	--------------

Additional product data

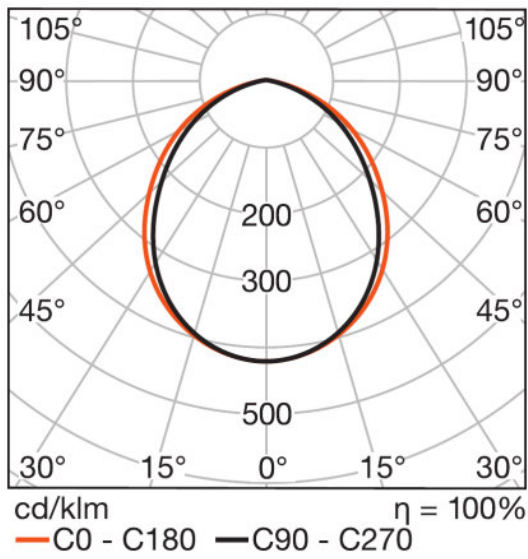

LDC typ polar

Equipped with lamp	Yes
--------------------	-----

Capabilities

Type of installation	Direct mounting/Surface-mounted
Type of connection	Terminal, 3-pole

Certificates & standards

Protection class	I
Type of protection	IP44
Standards	CE

COUNTRY SPECIFIC INFORMATION

Product code	METEL-Code	SEG number	STK number	UK Org
4052899918009	-	7761825	4516065	-

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899918009	NOXLITE LED HP FLOODLIGHT 40 W WT	Folding carton box 1	227 mm x 193 mm x 319 mm	13.98 dm ³	1912.00 g
4052899918023	NOXLITE LED HP FLOODLIGHT 40 W WT	Shipping carton box 2	408 mm x 248 mm x 350 mm	35.41 dm ³	4638.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.