



Datenblatt - Fiche technique - Data sheet

19.08.1008




ROLINE USB 3.0 Y-Kabel, 2x Typ A ST - Micro B ST, 1,8m

ROLINE Câble USB3.0 en Y, 2x Type A M - Micro B M, 1,8m

ROLINE USB 3.0 Y Cable, 2x Type A M - 1x Micro B M, 1.8 m

RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

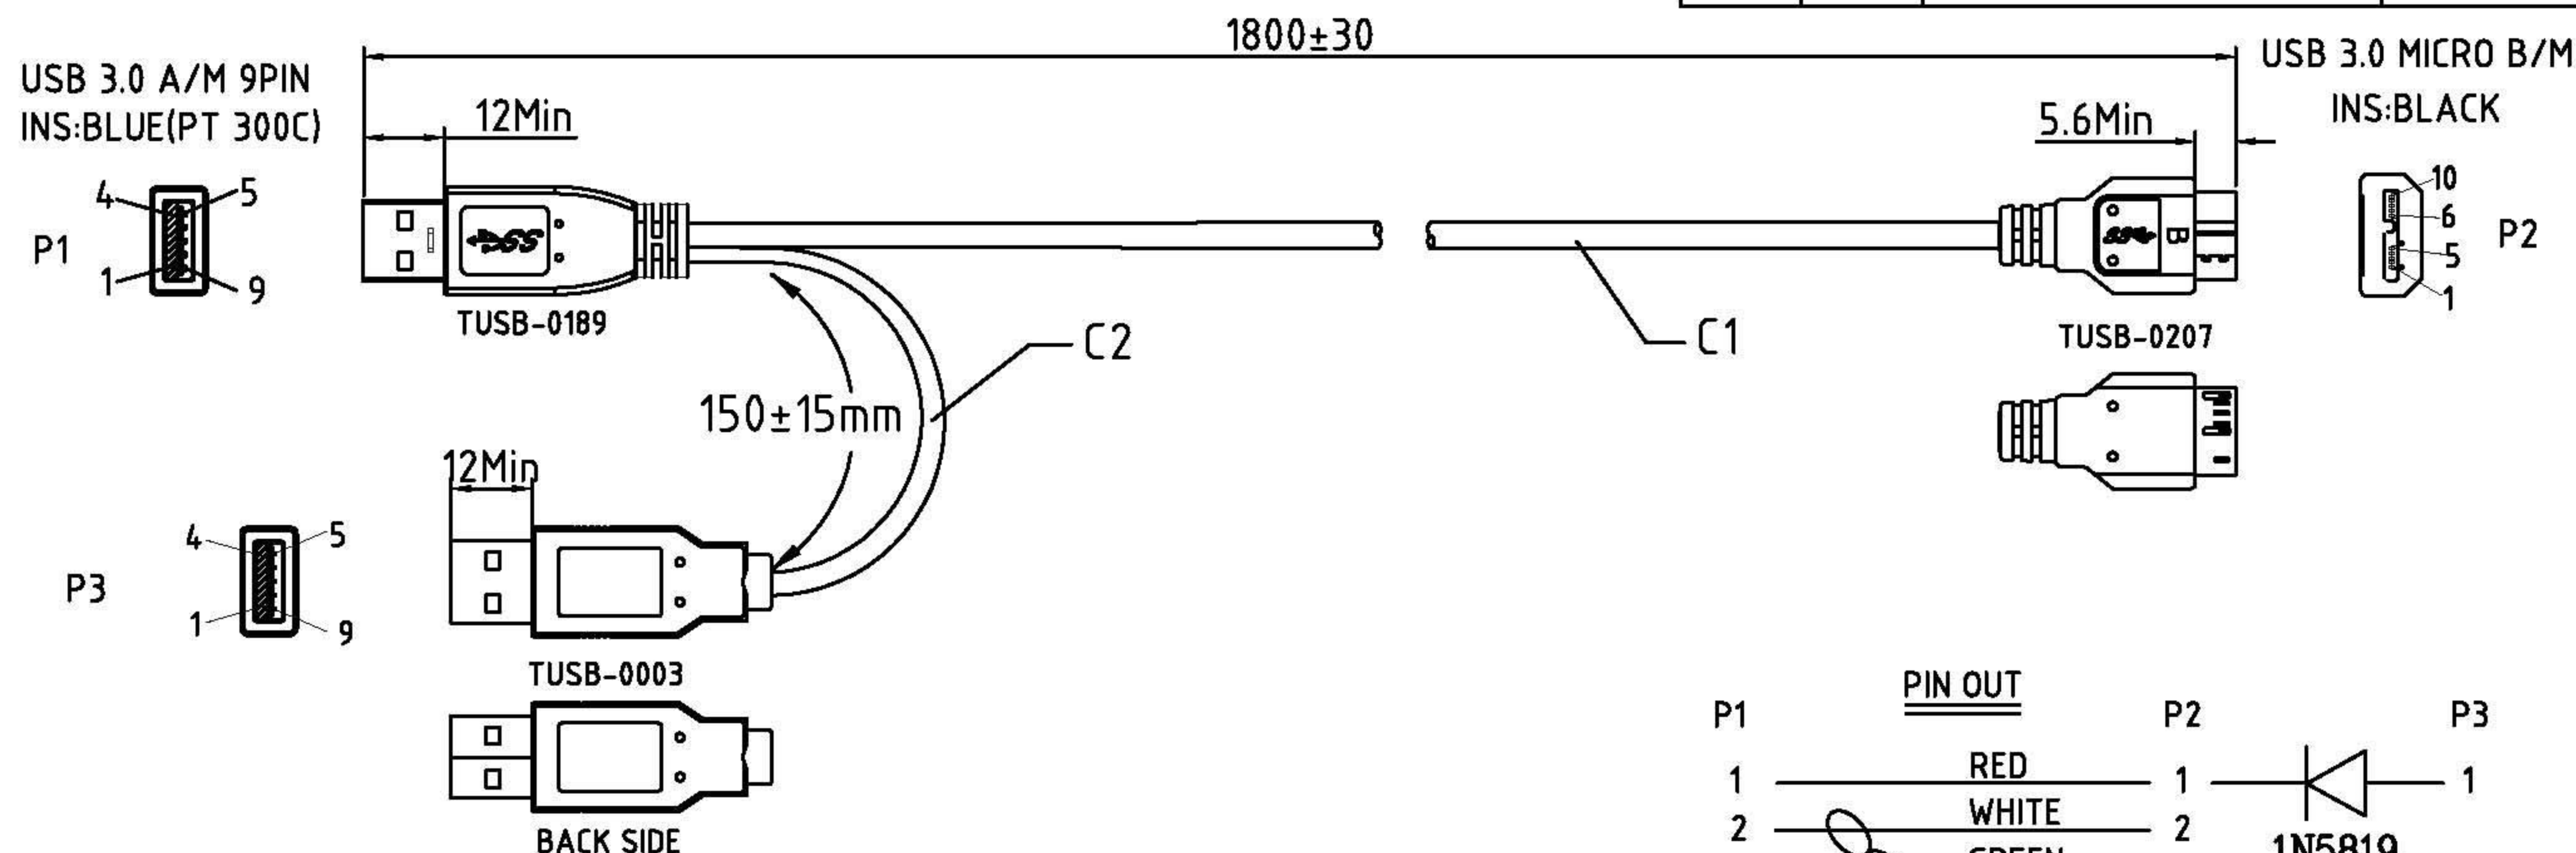

NOTE:

- CABLE: C1: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)+AL/MY +Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin +#24(7/0.203 T.C)×2C INS:Polyolefin+AL/MY+B.D(85%) PVC JACKET; OD:5.5±0.15mm COLOR:WHITE(NK-W27) REV 3.0.
C2: UL-2725 #28(7/0.127 T.C)×2C+AL/MY+SPIRAL PVC JACKET; OD:2.8±0.15mm COLOR:WHITE(NK-W27)
- CONNECTOR: P1&P2:USB 3.0 A TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
P3:USB 3.0 MICRO B TYPE MALE CONTACT:30u",SHELL:NI-PLATED.
- HOOD: P1&P2:MOLDED TYPE,PVC 45P,COLOR:WHITE(NK-W27).
P3:MOLDED TYPE,PVC 45P,COLOR:RED(NK-R01).
- ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST .
(2)CONTACT RESISTANCE 3 ohm Max .
(3)INSULATION RESISTANCE 10M ohm Min .
- PACKING:EACH PC / POLYBAG+SMALL HEADER CARD+BAR CODE LABEL
10 PCS / INNER CARTON
4 PCS INNER CARTON / MASTER CARTON(SIZE: 460×280×245mm)

P1	PIN OUT	P2	P3
1	RED	1	1
2	WHITE	2	1N5819
3	GREEN	3	
4	BLACK	5	4
5	BLUE	6	
6	YELLOW	7	
7	D.W	8	
8	PURPLE	9	
9	ORANGE	10	
SHELL	B.D	SHELL	SPIRAL SHELL

Tolerance Inch M/M			Rotronic Co., LTD.					
.X	.015	.30						
.XX	.010	.10	ROLINE USB 3.0 Y-Cable, 2xAM - 1xMicro BM					
.XXX	.005	.05						
Draw			Item No.: 19.08.1008					
FANNIE 06/23/11'								
Check			Scale NONE Units m/m Third Angle Projection					
Engr								
Dwg No.			170-0017		REV:A		Sheet 1/1	