




Datenblatt - Fiche technique - Data sheet


21.15.0964

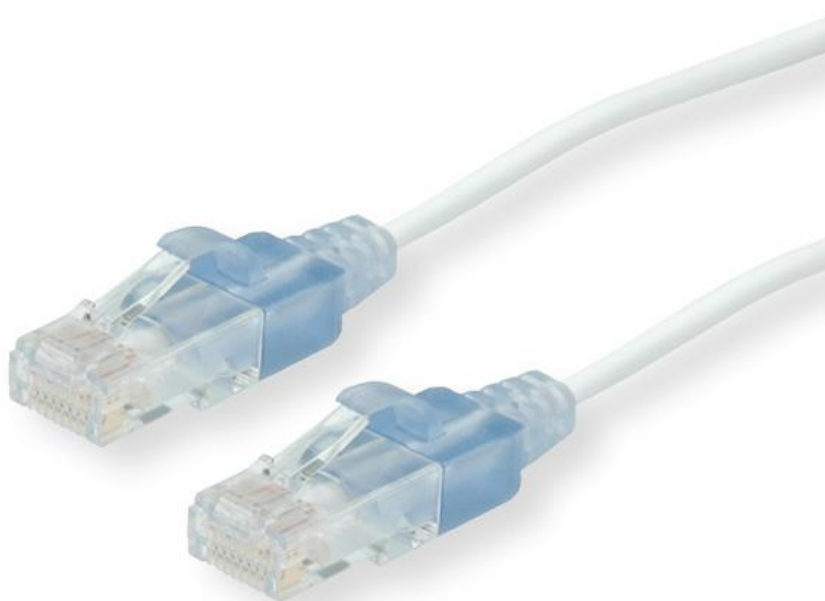

ROLINE UTP-Patchkabel Kat.6, slim, weiss, 1,5 m

Cordon ROLINE Cat.6 UTP, slim, blanc, 1,5 m


ROLINE UTP Patch Cord, Cat.6, slim, white, 1.5 m



B

INK MARKING: roline CAT.6 UTP PATCH CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 30AWGX4P

Item No.	Length	Tolerance
21.15.0960	0.5m	20mm
21.15.0961	1m	20mm
21.15.0964	1.5m	30mm
21.15.0962	2m	30mm
21.15.0963	3m	30mm
21.15.0965	5m	80mm




SEC:A-A

INSULATION:[HDPE OD=0.48±0.05mm]X4P

JACKET:PVC OD=3.0±0.2mm WH

CONDUCTOR:[30AWG(7/0.10±0.008mm) BC]X4P

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown



Minimum Bending Radius : ≥ 25 mm

③	BOOT	PVC Transparent Blue								2	Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05	DRAW. NO		TITLE	ROLINE UTP Patch Cord Cat6, slim, White			
②	PLUG	8P8C 50U RJ45								2		CUSTOMER						
①	CABLE	CAT.6 PVC 30AWG*4P WH								1		CUST' R P/N		DRAW	LM	DATE	2016.08.17	
No.	TITLE	DESCRIPTION								Q' TY		SCALE		CHECK	JZY	DATE	2016.08.17	
Material			Part Number		Note	☒ RoHS	☐ Reach	☐ GP	☐ HF	☐ Other	WL	 	UNIT	mm	APPROVED	LANDER	SHEET	