



Datenblatt - Fiche technique - Data sheet

21.15.0965





ROLINE UTP-Patchkabel Kat.6, slim, weiss, 5,0 m

Cordon ROLINE Cat.6 UTP, slim, blanc, 5,0 m


ROLINE UTP Patch Cord, Cat.6, slim, white, 5.0 m

10	11	12	13
DATE	REV.	REVISION	DRAFTING
2016.8.17	A0	NEW	LM
			CHECKED
			JZY

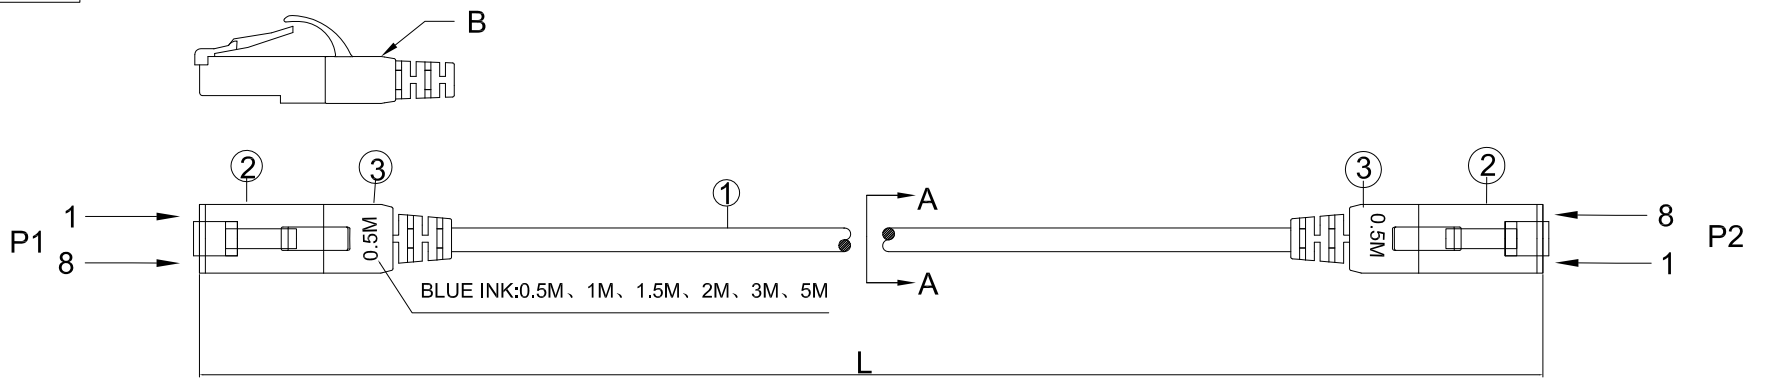


INK MARKING: roline CAT.6 UTP PATCH CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 30AWGX4P

Item No.	Length	Tolerance
21.15.0960	0.5m	20mm
21.15.0961	1m	20mm
21.15.0964	1.5m	30mm
21.15.0962	2m	30mm
21.15.0963	3m	30mm
21.15.0965	5m	80mm

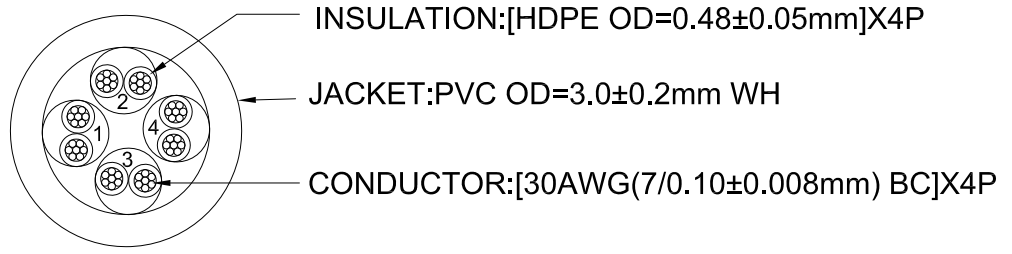

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown



Minimum Bending Radius : ≥ 25 mm

SECOMP

③	BOOT	PVC Transparent Blue	2	Unless specified on the drawing, tolerances are per the follows: X. ± 0.20 X° ± 3 .X ± 0.10 .X° ± 0.3 .XX ± 0.05	DRAW. NO		TITLE	ROLINE UTP Patch Cord Cat6, slim, White		
②	PLUG	8P8C 50U RJ45	2		CUSTOMER		DRAW	LM	DATE	2016.08.17
①	CABLE	CAT.6 PVC 30AWG*4P WH	1		SCALE		CHECK	JZY	DATE	2016.08.17
No.	TITLE	DESCRIPTION	Q' TY		UNIT	mm	APPROVED	LANDER	SHEET	

Material	Part Number	Note	<input checked="" type="checkbox"/> RoHS	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other	WL
----------	-------------	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------	----

