



Datenblatt - Fiche technique - Data sheet




21.15.2189



ROLINE GOLD S/FTP-(PiMF-) Patchkabel Kat.6A, 20,0 m

Cordon ROLINE GOLD Cat.6A S/FTP (PiMF), 20,0 m

ROLINE GOLD S/FTP Patch Cord Cat.6A, 20.0 m

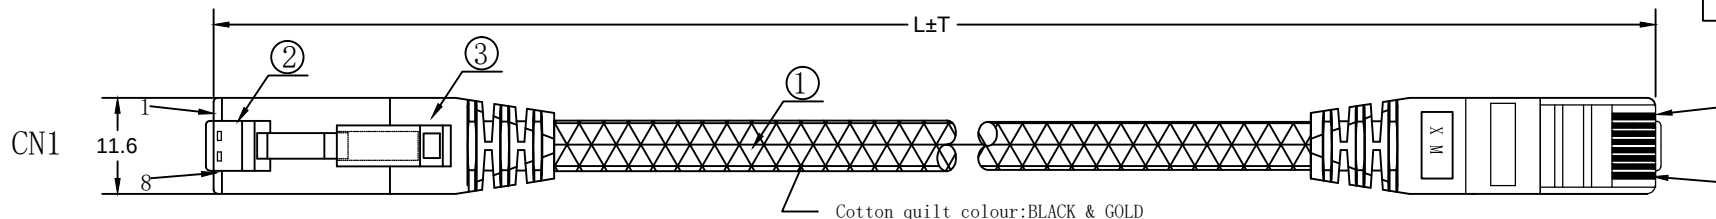

NOTE:

1. ELECTRICAL TEST:

- (1).100% OPEN SHORT, MISS WIRE TEST
- (2).INSULATION RESISTANCE:DC 300V 10M Ω ;
- (3).CONDUCTOR RESISTANCE:3 Ω Max (More than 3m,add one ohm per meter) ;

2.Fluke channel link test:

TEST LIMIT:ISO11801 Channel Class Ea

3.PRINT WORD:

CAT.6A S/FTP LSZH 500MHz ISO/IEC 11801 & EN

50173-1 & ANSI/TIA-568-C.2

4.ROHS2.0 & REACH COMPLIANT

P1	P2
1	1 WHITE
2	2 ORANGE
3	3 WHITE
6	6 GREEN
4	4 BLUE
5	5 WHITE
7	7 WHITE
8	8 BROWN
shell	braid shell

MATERIAL LIST

③	OVER MOLD	PVC 75A BLACK.	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug,Pin Gold Plated 3u",Shell Gold Plating Transparence	2	
①	CABLE	S/FTP CAT. 6A 27AWG (7/0.13BC*1P+AL-FOIL)*4PAIRS+BRAID (5*16/0.12mmAL-MG) JACKET:LSZH OD:6.0 $\pm$ 0.2mm, BLACK & GOLD Cotton Braiding OD:6.5 $\pm$ 0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW		2015-10-21
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

COLOUR:BLACK & GOLD					
ITEM NO.	LENGTH (L)		TOLERANCE (T)		
21.15.2180	0.5m		$\pm$ 15mm		
21.15.2181	1m		$\pm$ 30mm		
21.15.2182	2m		$\pm$ 60mm		
21.15.2183	3m		$\pm$ 90mm		
21.15.2185	5m		$\pm$ 150mm		
21.15.2186	7m		$\pm$ 210mm		
21.15.2187	10m		$\pm$ 300mm		
21.15.2188	15m		$\pm$ 450mm		
21.15.2189	20m		$\pm$ 600mm		
ITEM NO.	21.15.2180	21.15.2181	21.15.2182	21.15.2183	21.15.2185
	21.15.2186	21.15.2187	21.15.2188	21.15.2189	
DESC.	ROLINE GOLD SFTP CAT.6A Patch Cord With BLACK & GOLD Cotton Braiding				

SECOMP