



Datenblatt - Fiche technique - Data sheet


21.15.2517



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, rot, 10,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, rouge, 10,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, red, 10.0 m

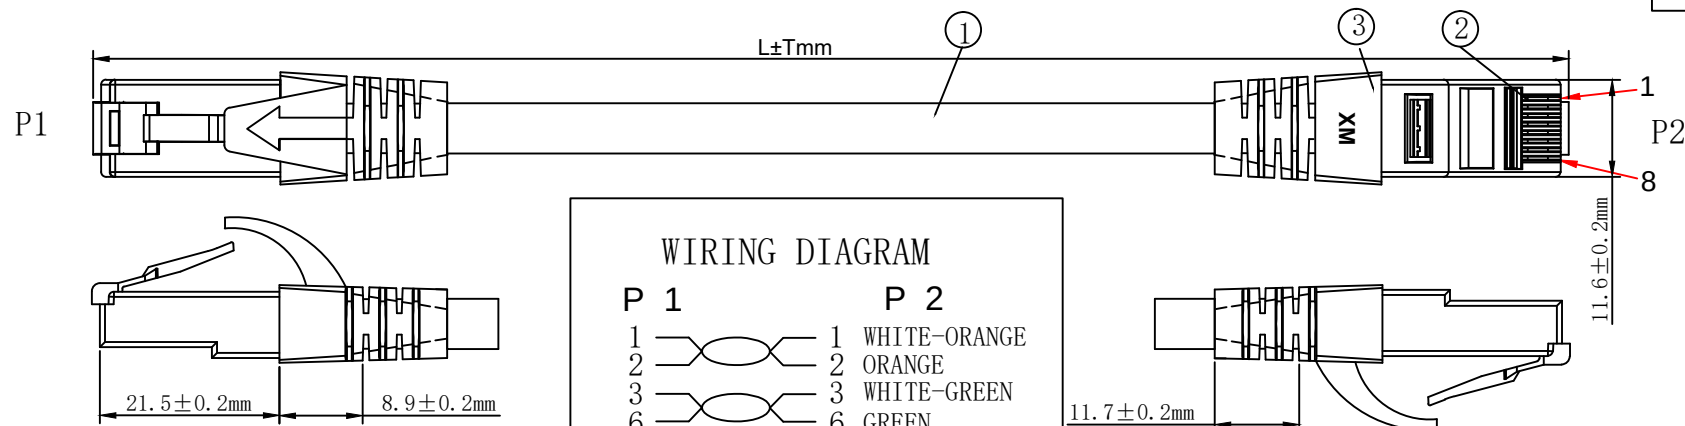

WIRING DIAGRAM

P 1		P 2
1		1 WHITE-ORANGE
2		2 ORANGE
3		3 WHITE-GREEN
6		6 GREEN
4		4 BLUE
5		5 WHITE-BLUE
7		7 WHITE-BROWN
8		8 BROWN

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3.100% Component Patch cord Test PASS

4. Minimum bending radius: 50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Red	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

COLOUR: Red (PANTONE : 199C)					
ITEM NO.		LENGTH (L)		TOLERANCE (T)	
21. 15. 2941		300mm		± 10mm	
21. 15. 2510		500mm		± 15mm	
21. 15. 2511		1000mm		± 30mm	
21. 15. 2514		1500mm		± 45mm	
21. 15. 2512		2000mm		± 60mm	
21. 15. 2513		3000mm		± 90mm	
21. 15. 2515		5000mm		± 150mm	
21. 15. 2516		7500mm		± 210mm	
21. 15. 2517		10000mm		± 300mm	
21. 15. 2518		15000mm		± 450mm	
21. 15. 2519		20000mm		± 600mm	
ITEM NO.	21. 15. 2941	21. 15. 2510	21. 15. 2511	21. 15. 2512	21. 15. 2513
21. 15. 2514	21. 15. 2515	21. 15. 2516	21. 15. 2517	21. 15. 2518	21. 15. 2519
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, red				

SECOMP

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.