




Datenblatt - Fiche technique - Data sheet


21.15.2528

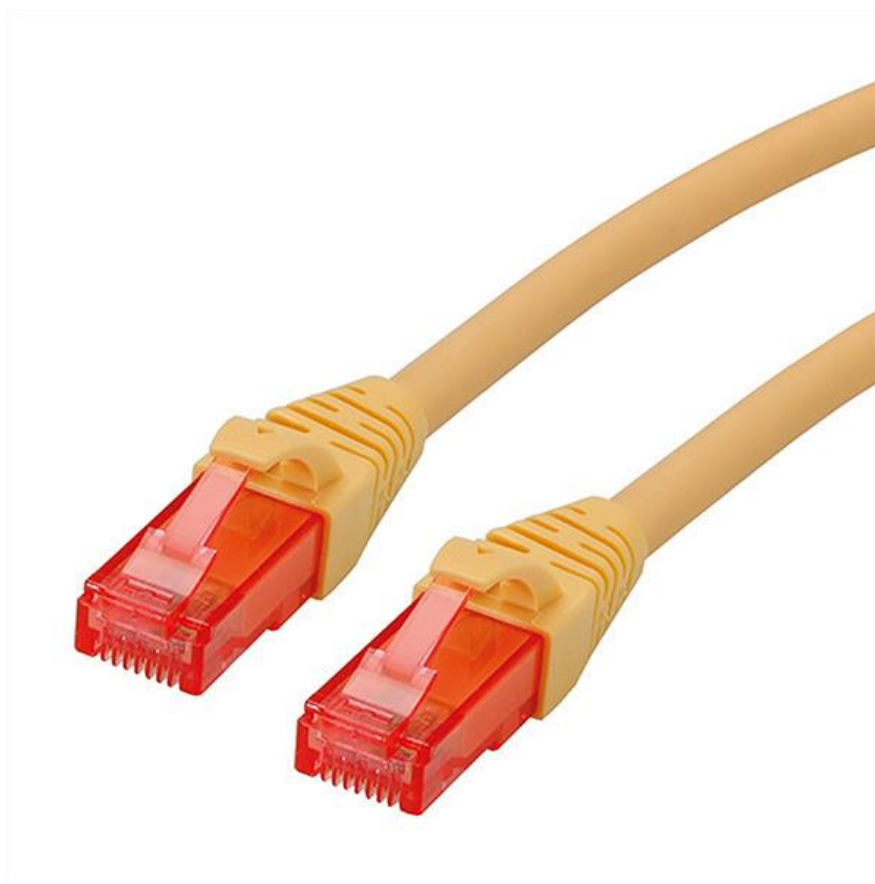

ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, gelb, 15,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, jaune, 15,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, yellow, 15.0 m

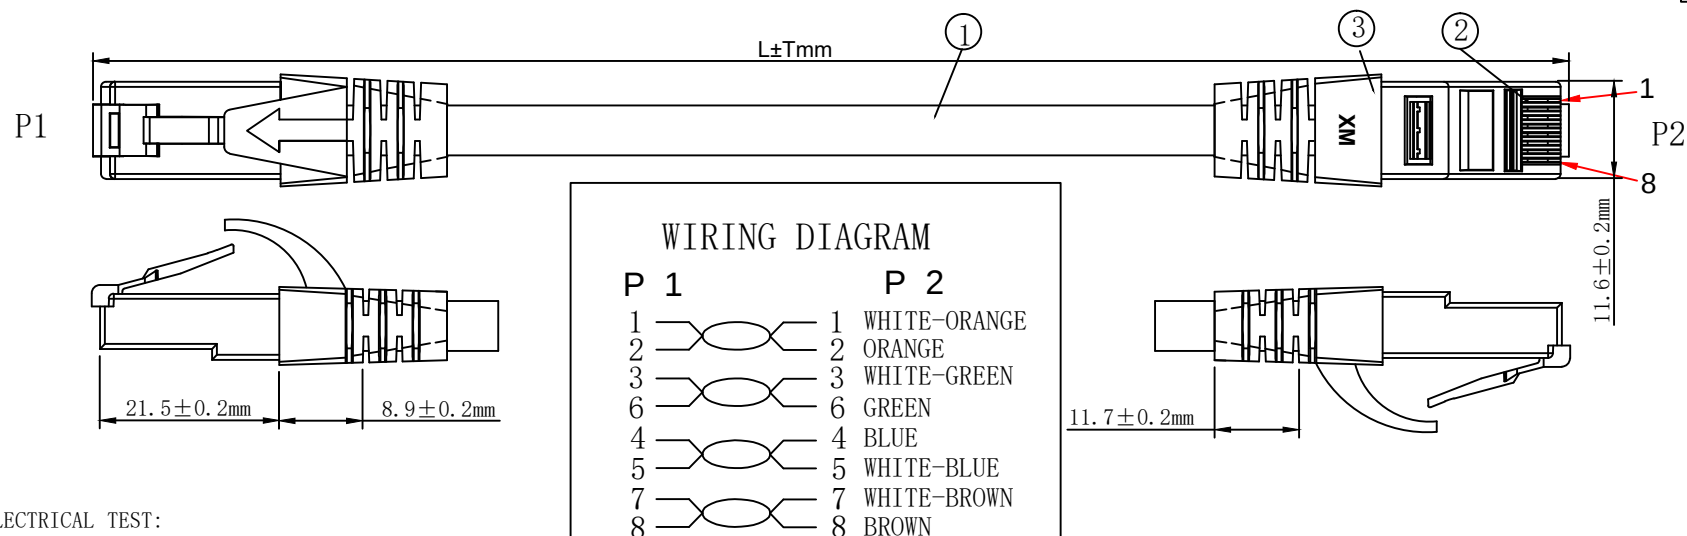

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHZ ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC yellow	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

COLOUR:yellow (PANTONE:135C)					
ITEM NO.		LENGTH (L)		TOLERANCE (T)	
21. 15. 2942		300mm		± 10mm	
21. 15. 2520		500mm		± 15mm	
21. 15. 2521		1000mm		± 30mm	
21. 15. 2524		1500mm		± 45mm	
21. 15. 2522		2000mm		± 60mm	
21. 15. 2523		3000mm		± 90mm	
21. 15. 2525		5000mm		± 150mm	
21. 15. 2526		7500mm		± 210mm	
21. 15. 2527		10000mm		± 300mm	
21. 15. 2528		15000mm		± 450mm	
21. 15. 2529		20000mm		± 600mm	
ITEM NO.	21. 15. 2942	21. 15. 2520	21. 15. 2521	21. 15. 2522	21. 15. 2523
21. 15. 2524	21. 15. 2525	21. 15. 2526	21. 15. 2527	21. 15. 2528	21. 15. 2529
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, yellow				

SECOMP

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.