




Datenblatt - Fiche technique - Data sheet


21.15.2538

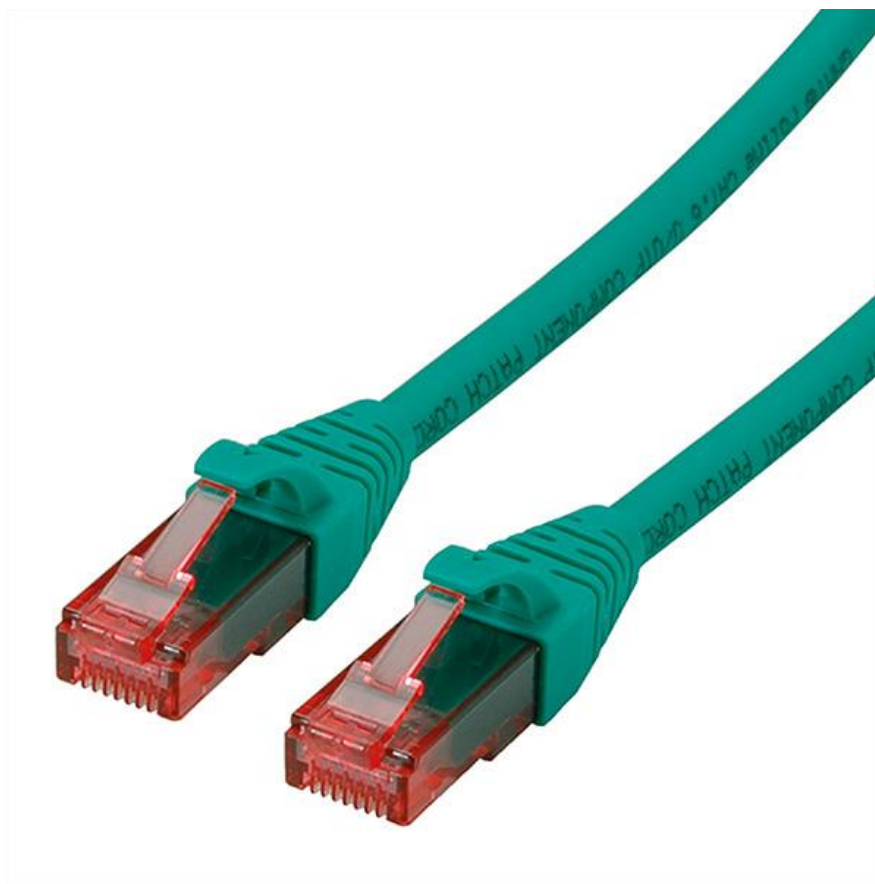

ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, grün, 15,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, vert, 15,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, green, 15.0 m

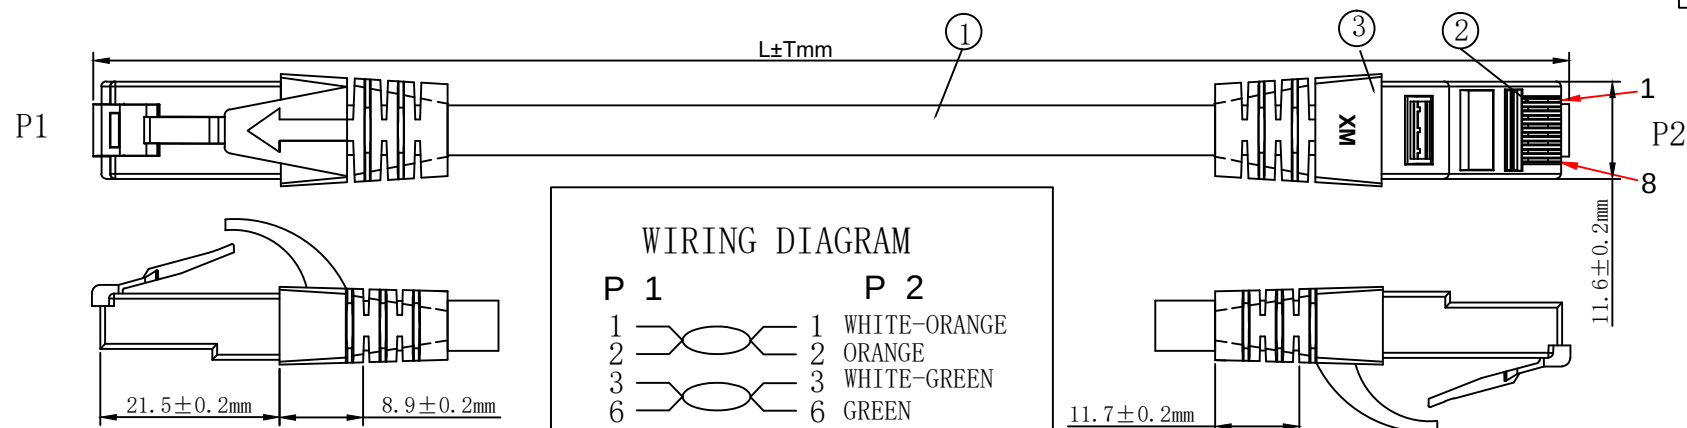

WIRING DIAGRAM

P 1		P 2
1		1 WHITE-ORANGE
2		2 ORANGE
3		3 WHITE-GREEN
6		6 GREEN
4		4 BLUE
5		5 WHITE-BLUE
7		7 WHITE-BROWN
8		8 BROWN

1. ELECTRICAL TEST:
 (1). 100% OPEN SHORT & MISS WIRE TEST;
 (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
 (3). CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Green	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Green (PANTONE:3278C)					
ITEM NO.		LENGTH (L)		TOLERANCE (T)	
21. 15. 2943		300mm		± 10mm	
21. 15. 2530		500mm		± 15mm	
21. 15. 2531		1000mm		± 30mm	
21. 15. 2534		1500mm		± 45mm	
21. 15. 2532		2000mm		± 60mm	
21. 15. 2533		3000mm		± 90mm	
21. 15. 2535		5000mm		± 150mm	
21. 15. 2536		7500mm		± 210mm	
21. 15. 2537		10000mm		± 300mm	
21. 15. 2538		15000mm		± 450mm	
21. 15. 2539		20000mm		± 600mm	
ITEM NO.	21. 15. 2943	21. 15. 2530	21. 15. 2531	21. 15. 2532	21. 15. 2533
21. 15. 2534	21. 15. 2535	21. 15. 2536	21. 15. 2537	21. 15. 2538	21. 15. 2539
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Green				

SECOMP

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.