



Datenblatt - Fiche technique - Data sheet


21.15.2580



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, braun, 0,5 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, brun, 0,5 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, brown, 0.5 m

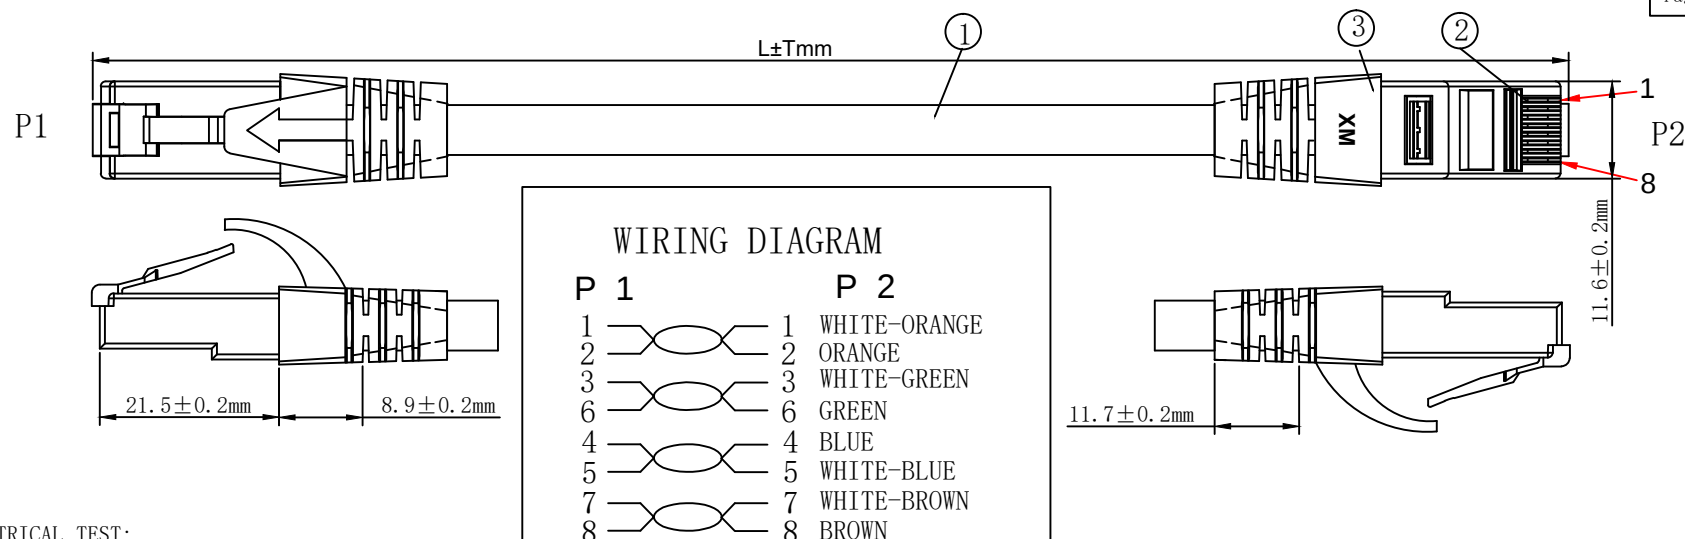

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
 (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
 (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Brown	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

COLOUR: Brown (PANTONE: 463C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21.15.2948	300mm	±10mm
21.15.2580	500mm	±15mm
21.15.2581	1000mm	±30mm
21.15.2584	1500mm	±45mm
21.15.2582	2000mm	±60mm
21.15.2583	3000mm	±90mm
21.15.2585	5000mm	±150mm
21.15.2586	7500mm	±210mm
21.15.2587	10000mm	±300mm
21.15.2588	15000mm	±450mm
21.15.2589	20000mm	±600mm

ITEM NO.	21.15.2948	21.15.2580	21.15.2581	21.15.2582	21.15.2583
21.15.2584	21.15.2585	21.15.2586	21.15.2587	21.15.2588	21.15.2589
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Brown				

SECOMP

NEW

2016-10-20

A

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
----	-----	-------------------------------	------	------