



Datenblatt - Fiche technique - Data sheet


21.15.2597



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, pink, 10,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, pink, 10,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, pink, 10.0 m

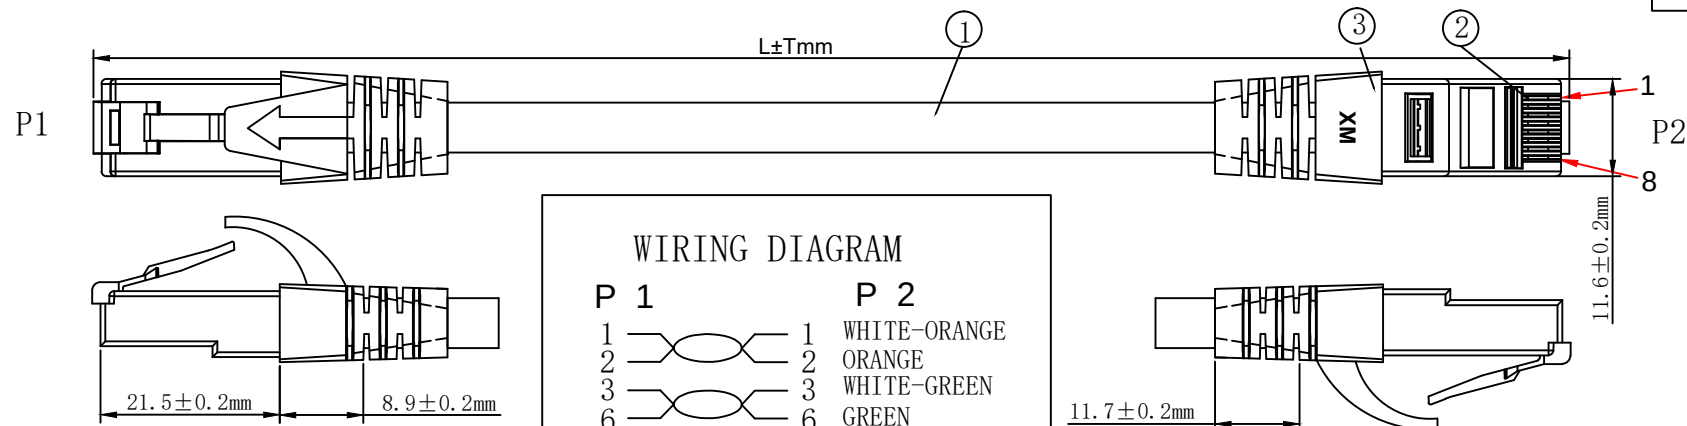

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Pink	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR: Pink (PANTONE: 212C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21.15.2949	300mm	±10mm
21.15.2590	500mm	±15mm
21.15.2591	1000mm	±30mm
21.15.2594	1500mm	±45mm
21.15.2592	2000mm	±60mm
21.15.2593	3000mm	±90mm
21.15.2595	5000mm	±150mm
21.15.2596	7500mm	±210mm
21.15.2597	10000mm	±300mm
21.15.2598	15000mm	±450mm
21.15.2599	20000mm	±600mm

ITEM NO.	21.15.2949	21.15.2590	21.15.2591	21.15.2592	21.15.2593
21.15.2594	21.15.2595	21.15.2596	21.15.2597	21.15.2598	21.15.2599
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Pink				

SECOMP