




Datenblatt - Fiche technique - Data sheet


21.15.2646

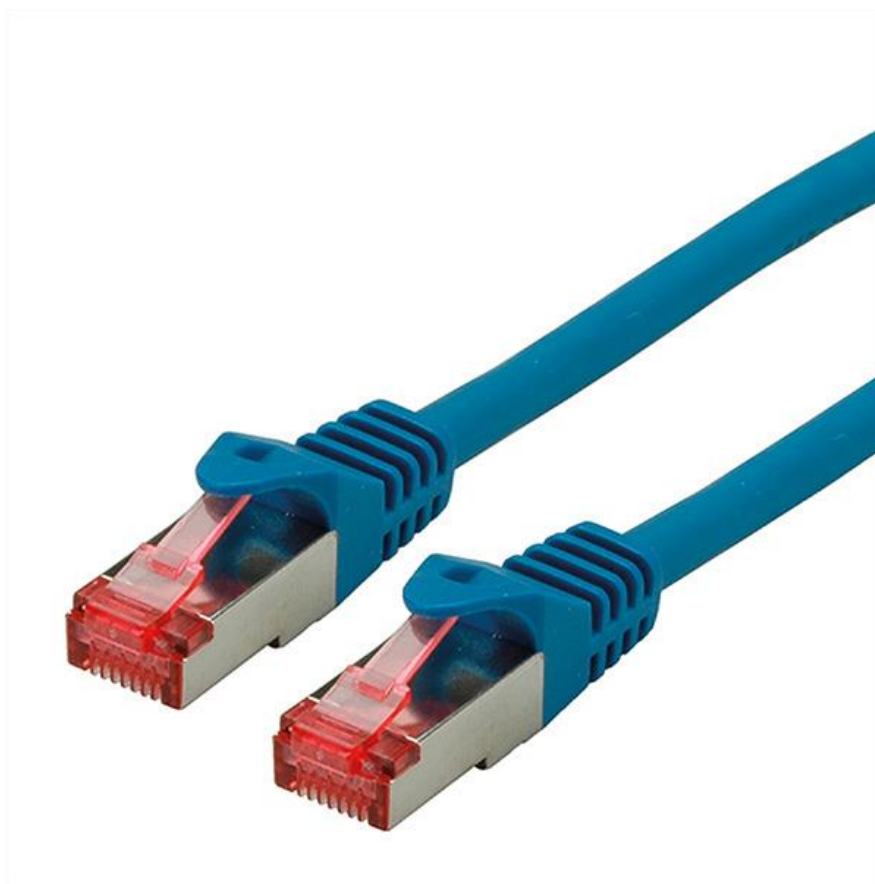

ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, blau, 7,5 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, bleu, 7,5 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, blue, 7.5 m

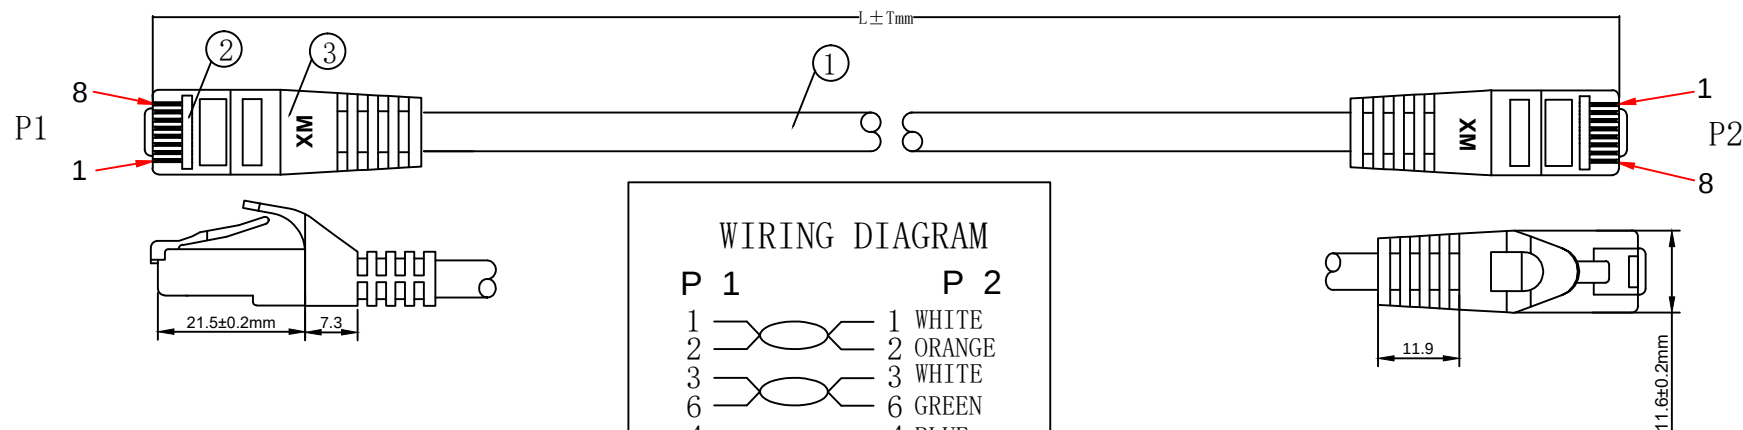

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
 (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
 (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC blue	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR: blue (PANTONE: 647C)

ITEM NO.		LENGTH (L)		TOLERANCE (T)	
21. 15. 2955		300mm		± 10mm	
21. 15. 2640		500mm		± 15mm	
21. 15. 2641		1000mm		± 30mm	
21. 15. 2644		1500mm		± 45mm	
21. 15. 2642		2000mm		± 60mm	
21. 15. 2643		3000mm		± 90mm	
21. 15. 2645		5000mm		± 150mm	
21. 15. 2646		7500mm		± 210mm	
21. 15. 2647		10000mm		± 300mm	
21. 15. 2648		15000mm		± 450mm	
21. 15. 2649		20000mm		± 600mm	
ITEM NO.	21. 15. 2955	21. 15. 2640	21. 15. 2641	21. 15. 2642	21. 15. 2643
21. 15. 2644	21. 15. 2645	21. 15. 2646	21. 15. 2647	21. 15. 2648	21. 15. 2649
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, blue				

SECOMP