




Datenblatt - Fiche technique - Data sheet


21.15.2659

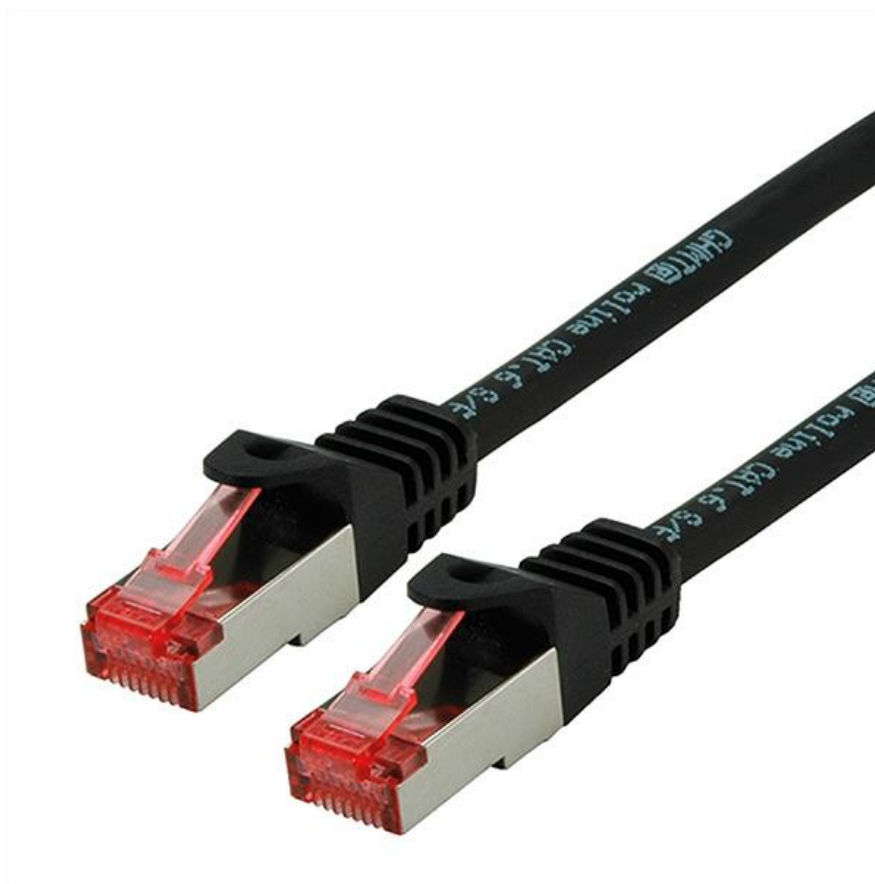

ROLINE Patchkabel Kat.6 S/FTP (PiMF), Comp. Level, LSOH, schwarz, 20 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, noir, 20 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, black, 20.0 m

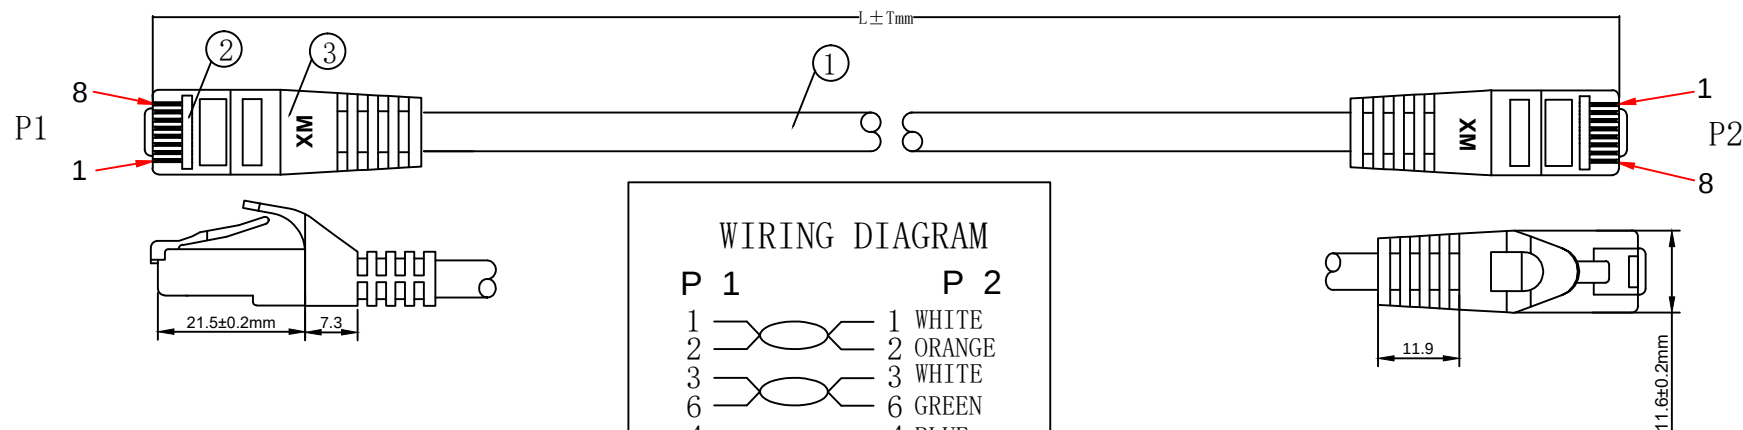

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC black	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR: black (PANTONE: black 3C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21.15.2956	300mm	±10mm
21.15.2650	500mm	±15mm
21.15.2651	1000mm	±30mm
21.15.2654	1500mm	±45mm
21.15.2652	2000mm	±60mm
21.15.2653	3000mm	±90mm
21.15.2655	5000mm	±150mm
21.15.2656	7500mm	±210mm
21.15.2657	10000mm	±300mm
21.15.2658	15000mm	±450mm
21.15.2659	20000mm	±600mm

ITEM NO.	21.15.2956	21.15.2650	21.15.2651	21.15.2652	21.15.2653
21.15.2654	21.15.2655	21.15.2656	21.15.2657	21.15.2658	21.15.2659
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, black				

SECOMP

NEW

2016-10-20

A

BY CHK REVISION RECORD MODIFICATIONS DATE REV.