



Datenblatt - Fiche technique - Data sheet


21.15.2683



ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, braun, 3,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, brun, 3,0 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, brown, 3.0 m

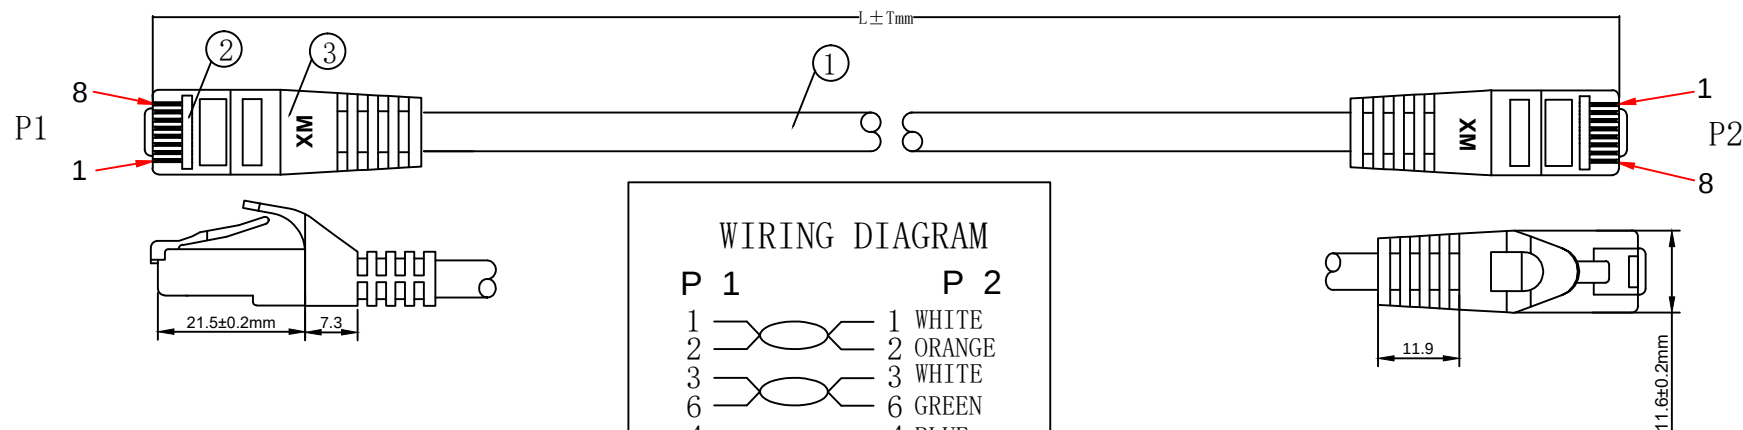

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
 (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
 (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Brown	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR: Brown (PANTONE: 463C)					
ITEM NO.	LENGTH (L)		TOLERANCE (T)		
21.15.2959	300mm		±10mm		
21.15.2680	500mm		±15mm		
21.15.2681	1000mm		±30mm		
21.15.2684	1500mm		±45mm		
21.15.2682	2000mm		±60mm		
21.15.2683	3000mm		±90mm		
21.15.2685	5000mm		±150mm		
21.15.2686	7500mm		±210mm		
21.15.2687	10000mm		±300mm		
21.15.2688	15000mm		±450mm		
21.15.2689	20000mm		±600mm		
ITEM NO.	21.15.2959	21.15.2680	21.15.2681	21.15.2682	21.15.2683
21.15.2684	21.15.2685	21.15.2686	21.15.2687	21.15.2688	21.15.2689
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, Brown				

SECOMP