



Datenblatt - Fiche technique - Data sheet


21.15.2693



ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, pink, 3,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, pink, 3,0 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, pink, 3.0 m

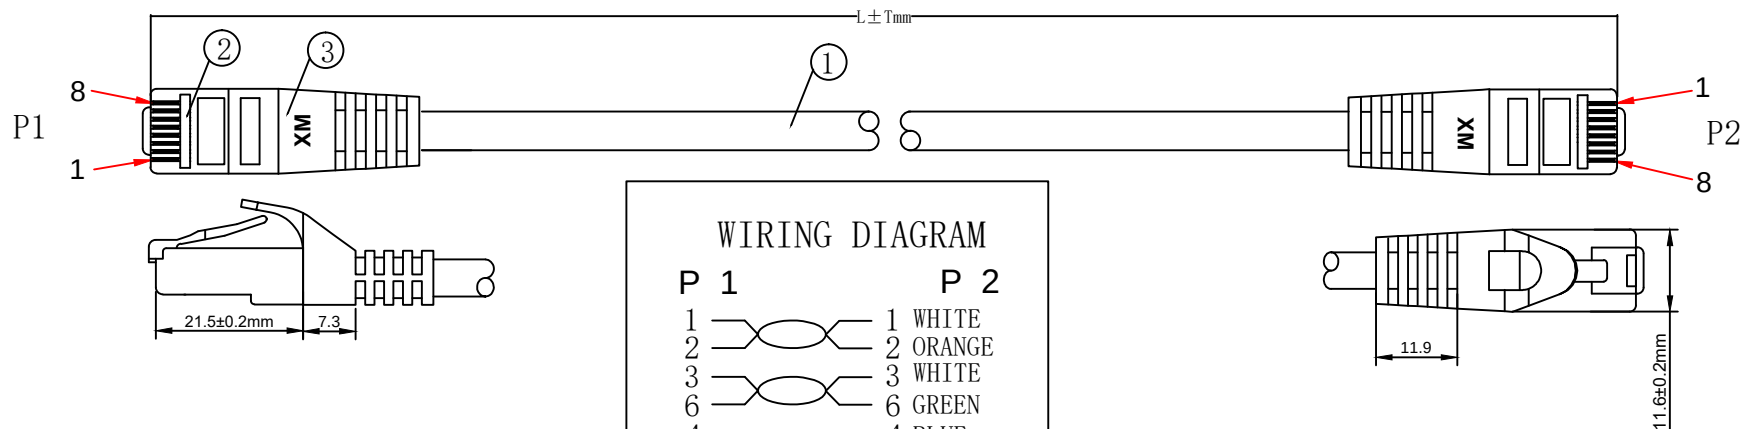

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Pink	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR: Pink (PANTONE: 212C)					
ITEM NO.	LENGTH (L)		TOLERANCE (T)		
21. 15. 2960	300mm		± 10mm		
21. 15. 2690	500mm		± 15mm		
21. 15. 2691	1000mm		± 30mm		
21. 15. 2694	1500mm		± 45mm		
21. 15. 2692	2000mm		± 60mm		
21. 15. 2693	3000mm		± 90mm		
21. 15. 2695	5000mm		± 150mm		
21. 15. 2696	7500mm		± 210mm		
21. 15. 2697	10000mm		± 300mm		
21. 15. 2698	15000mm		± 450mm		
21. 15. 2699	20000mm		± 600mm		
ITEM NO.	21. 15. 2960	21. 15. 2690	21. 15. 2691	21. 15. 2692	21. 15. 2693
21. 15. 2694	21. 15. 2695	21. 15. 2696	21. 15. 2697	21. 15. 2698	21. 15. 2699
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, Pink				

SECOMP