



Datenblatt - Fiche technique - Data sheet


21.15.2795



ROLINE Patchkabel Kat.6A UTP, Component Level, LSOH, pink, 5,0 m

Cordon ROLINE UTP Cat.6A / 10 Gigabit, Component Level, LSOH, pink, 5,0 m

ROLINE UTP Patch Cord Cat.6A, Component Level, LSOH, pink, 5.0 m

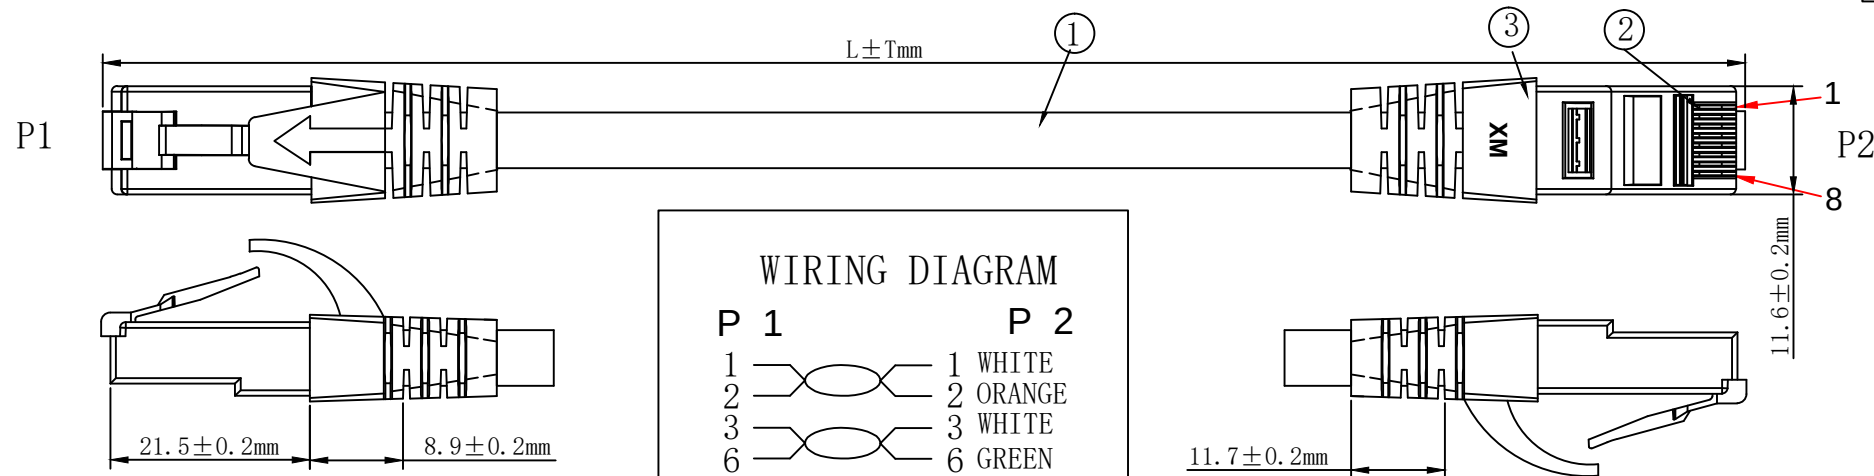

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT. 6A U/UTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Pink	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent Blue	2PCS	
①	CABLE	S/FTP CAT. 6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Pink (PANTONE:212C)		
ITEM NO.	LENGTH(L)	TOLERANCE(T)
21. 15. 2990	300mm	± 10mm
21. 15. 2790	500mm	± 15mm
21. 15. 2791	1000mm	± 30mm
21. 15. 2794	1500mm	± 45mm
21. 15. 2792	2000mm	± 60mm
21. 15. 2793	3000mm	± 90mm
21. 15. 2795	5000mm	± 150mm
21. 15. 2796	7500mm	± 210mm
21. 15. 2797	10000mm	± 300mm
21. 15. 2798	15000mm	± 450mm
21. 15. 2799	20000mm	± 600mm

ITEM NO.	21. 15. 2990	21. 15. 2790	21. 15. 2791	21. 15. 2792	21. 15. 2793
21. 15. 2794	21. 15. 2795	21. 15. 2796	21. 15. 2797	21. 15. 2798	21. 15. 2799
DESC.	ROLINE U/UTP PatchCord CAT. 6A, LSOH, Comp. Level, Pink				

SECOMP

		NEW	2016-09-13	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.