



Datenblatt - Fiche technique - Data sheet


21.15.2900



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, violett, 0,5 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, violet, 0,5 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, violet, 0.5 m

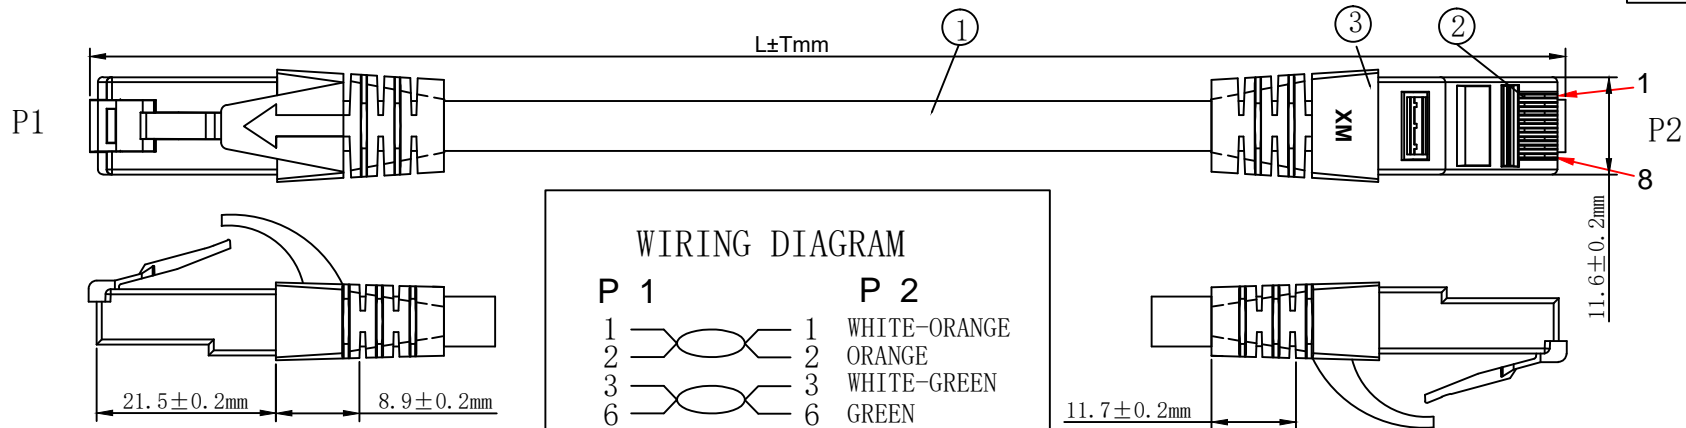

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Purple	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Purple (PANTONE:2725C)		
ITEM NO.	LENGTH (L)	TOLERANCE (T)
21.15.2950	300mm	±10mm
21.15.2900	500mm	±15mm
21.15.2901	1000mm	±30mm
21.15.2904	1500mm	±45mm
21.15.2902	2000mm	±60mm
21.15.2903	3000mm	±90mm
21.15.2905	5000mm	±150mm
21.15.2906	7500mm	±210mm
21.15.2907	10000mm	±300mm
21.15.2908	15000mm	±450mm
21.15.2909	20000mm	±600mm

ITEM NO.	21.15.2950	21.15.2900	21.15.2901	21.15.2902	21.15.2903
21.15.2904	21.15.2905	21.15.2906	21.15.2907	21.15.2908	21.15.2909
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Purple				

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP