



Datenblatt - Fiche technique - Data sheet


21.15.2908



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, violett, 15,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, violet, 15,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, violet, 15.0 m

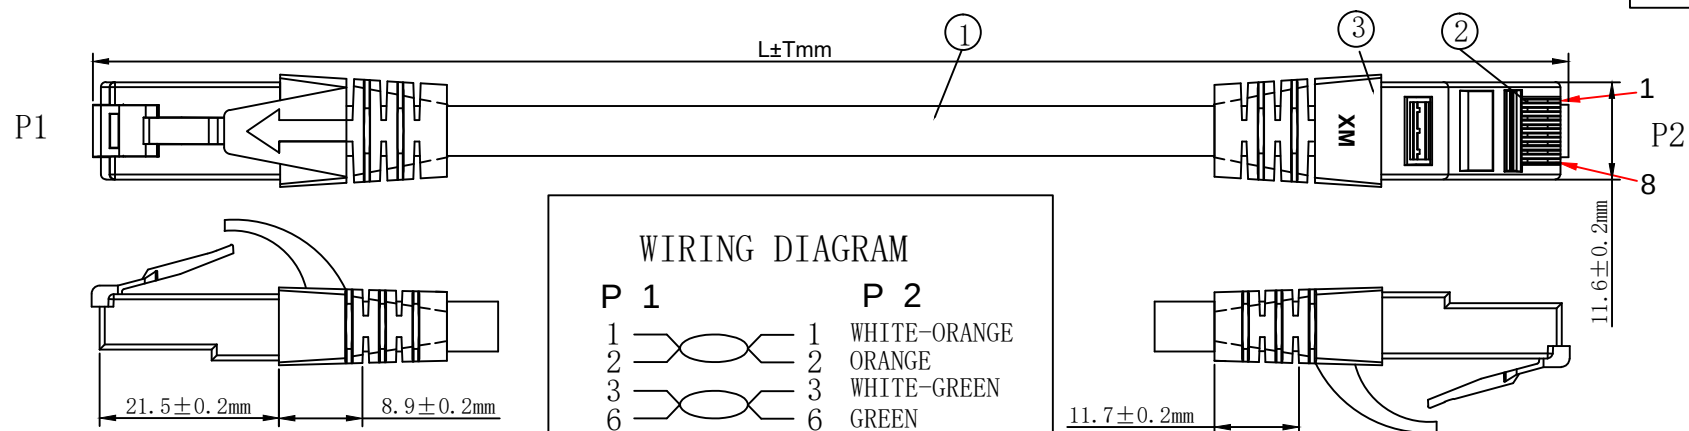

1. ELECTRICAL TEST:

- (1).100% OPEN SHORT & MISS WIRE TEST;
 (2).INSULATION RESISTANCE:DC 250V 20M OHM MIN;
 (3).CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3.100% Component Patch cord Test PASS

4.Minimum bending radius:50mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Purple	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u",Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Purple (PANTONE:2725C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2950	300mm	±10mm
21. 15. 2900	500mm	±15mm
21. 15. 2901	1000mm	±30mm
21. 15. 2904	1500mm	±45mm
21. 15. 2902	2000mm	±60mm
21. 15. 2903	3000mm	±90mm
21. 15. 2905	5000mm	±150mm
21. 15. 2906	7500mm	±210mm
21. 15. 2907	10000mm	±300mm
21. 15. 2908	15000mm	±450mm
21. 15. 2909	20000mm	±600mm

ITEM NO.	21. 15. 2950	21. 15. 2900	21. 15. 2901	21. 15. 2902	21. 15. 2903
21. 15. 2904	21. 15. 2905	21. 15. 2906	21. 15. 2907	21. 15. 2908	21. 15. 2909
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Purple				

SECOMP

NEW

2016-10-20

A

BY

CHK

REVISION RECORD MODIFICATIONS

DATE

REV.