




Datenblatt - Fiche technique - Data sheet


21.15.2961

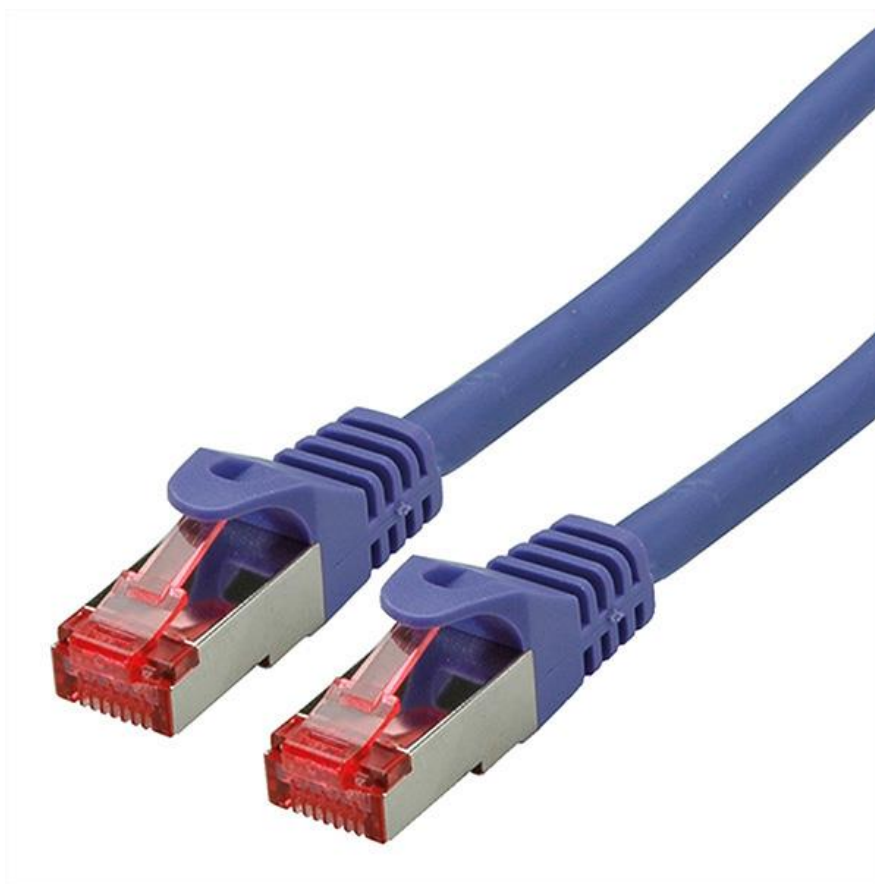

ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, violett, 0,3 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, violet, 0,3 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, violet, 0.3 m

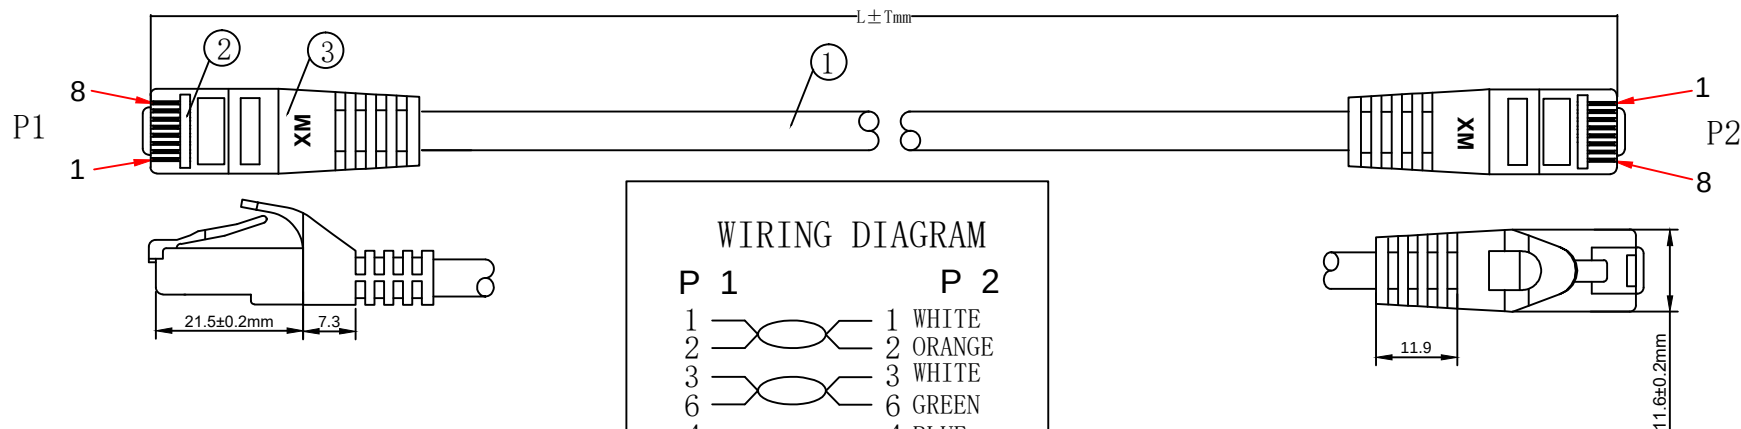

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE: DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE: 30 OHM MAX

2. PRINTING: GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius: 60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Purple	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2016-10-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR: Purple (PANTONE: 2725C)					
ITEM NO.	LENGTH (L)		TOLERANCE (T)		
21. 15. 2961	300mm		± 10mm		
21. 15. 2910	500mm		± 15mm		
21. 15. 2911	1000mm		± 30mm		
21. 15. 2914	1500mm		± 45mm		
21. 15. 2912	2000mm		± 60mm		
21. 15. 2913	3000mm		± 90mm		
21. 15. 2915	5000mm		± 150mm		
21. 15. 2916	7500mm		± 210mm		
21. 15. 2917	10000mm		± 300mm		
21. 15. 2918	15000mm		± 450mm		
21. 15. 2919	20000mm		± 600mm		
ITEM NO.	21. 15. 2961	21. 15. 2910	21. 15. 2911	21. 15. 2912	21. 15. 2913
21. 15. 2914	21. 15. 2915	21. 15. 2916	21. 15. 2917	21. 15. 2918	21. 15. 2919
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, Purple				

SECOMP