



Datenblatt - Fiche technique - Data sheet

21.15.9301



ROLINE LWL-Kabel 62,5/125 μ m SC/SC, orange, 1m

ROLINE Câble patch FO 62,5/125 μ m SC/SC, orange, 1m

ROLINE Fibre Optic Jumper Cable 62.5/125 μ m SC/SC, orange, 1 m

1

2

3

4

5

6

A

A


B

B

C

C

D

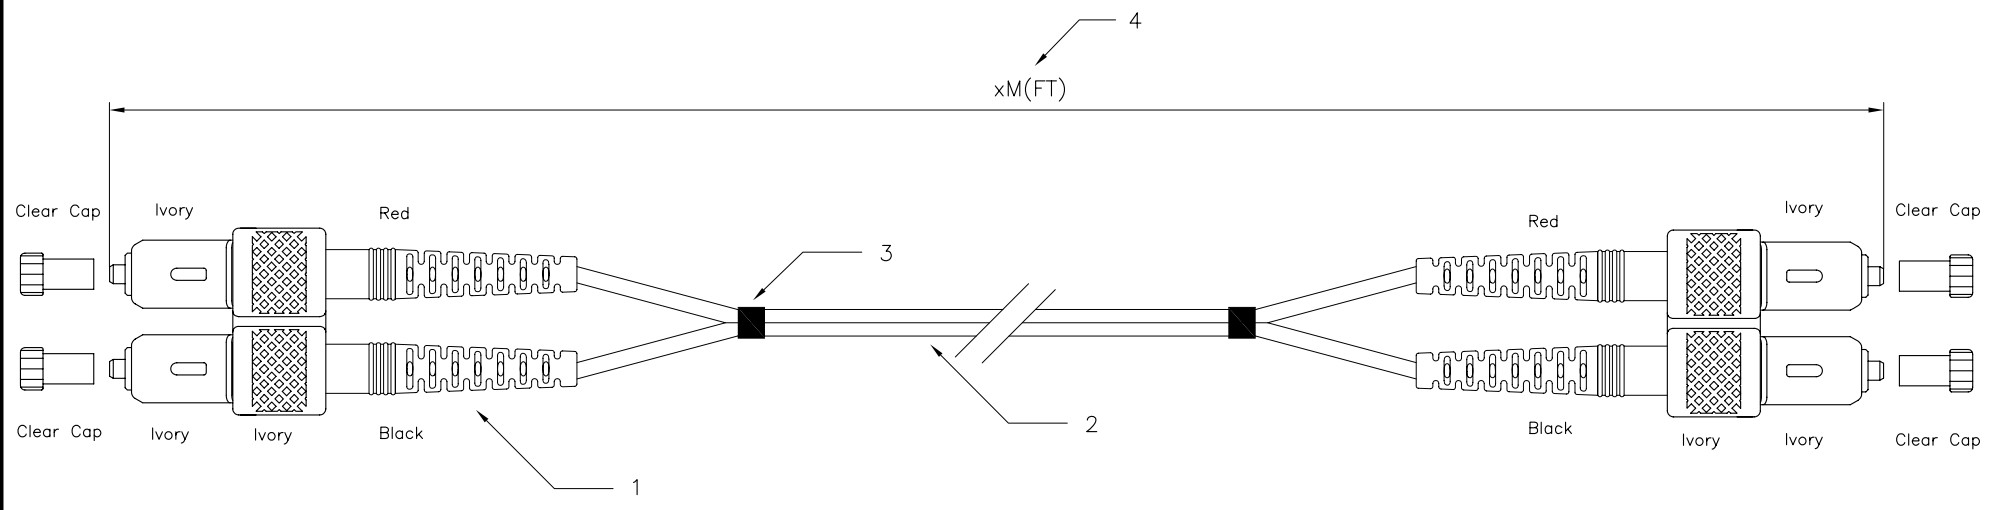

Specification:

- 1. Connector Type : SC Multimode
- 2. Cable Type :
2-1 Zipcord Cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode.
2-2 Calbe Jacket : Orange Color, PVC Material.
- 3. Shrink Tube
- 4. Length : xM(FT)

Performance:

- a. Insertion Loss : <0.5 dB
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. $\phi 2.5\text{mm}$ Ferrule End-face Radius : $8 < R < 25\text{mm}$
- d. Apex Offset : < 50um
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature : -20°C to $+70^{\circ}\text{C}$
- g. Storage Temperature : -40°C to $+80^{\circ}\text{C}$

Remack#

| | | |
|------------|------------------------------|------|
| 21.15.9300 | MultiMode, SC-SC,62.5/125 um | 0.5M |
| 21.15.9301 | MultiMode, SC-SC,62.5/125 um | 1M |
| 21.15.9302 | MultiMode, SC-SC,62.5/125 um | 2M |
| 21.15.9303 | MultiMode, SC-SC,62.5/125 um | 3M |
| 21.15.9305 | MultiMode, SC-SC,62.5/125 um | 5M |
| 21.15.9309 | MultiMode, SC-SC,62.5/125 um | 10M |

| | | | | |
|---|----------|---------------------------------------|------|----------------------------------|
| GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1 | DRAWING | 06.JAN.2011 | Abby | Rotronic Co.,LTd. |
| | CHECK | 06.JAN.2011 | MAER | |
| | APPROVAL | 06.JAN.2011 | YTY | |
| | | DATE | NAME | ITEM NO.: 21.15.XXXX 有吊卡 |
| SCALE | 1/1 (A4) | UNIT | mm | DES.: SC to SC Duplex patch cord |
| | | DRAWING NO. SFBJC092323xxxx06001(SA1) | | |
| | | DRAWING CLASSIFICATION S SHEET 1 OF 1 | | |

1

2

0

3

4

10cm

5

6