




Datenblatt - Fiche technique - Data sheet

21.15.9355

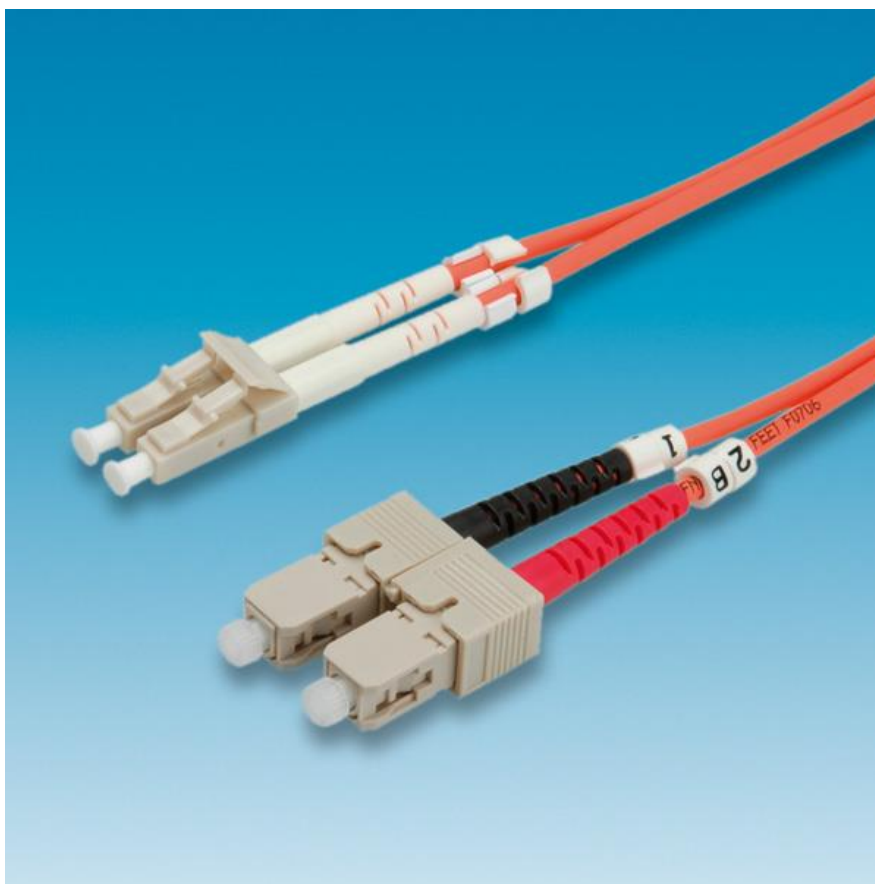

ROLINE LWL-Kabel 62,5/125µm LC/SC, orange, 5m

ROLINE Câble patch FO 62,5/125µm LC/SC, orange, 5m

ROLINE Fibre Optic Jumper Cable 62.5/125µm LC/SC, orange, 5 m

1

2

3

4

5

6

A

A


B

B

C

C

D

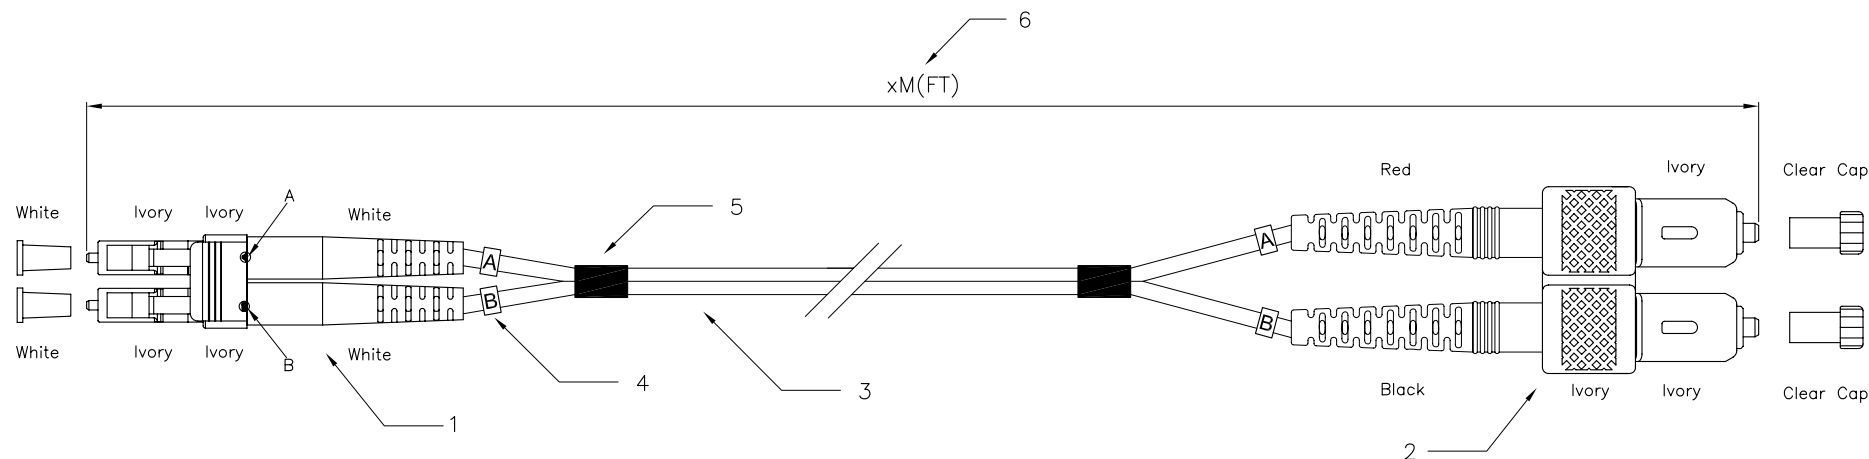

Specification:

1. Connector Type : LC Multimode
2. Connector Type : SC Multimode
3. Cable Type :
3-1 Zipcord Cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode.
3-2 Calbe Jacket : Orange Color, PVC Material.
4. Cable Marker
5. Shrink Tube
6. Length : xM(FT)

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. $\phi 1.25\text{mm}$ Ferrule End-face Radius : $7 < R < 25\text{mm}$
 $\phi 2.5\text{mm}$ Ferrule End-face Radius : $8 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature : -20° to $+70^\circ$
- g. Storage Temperature : -40° to $+80^\circ$

Remack#

21.15.9349	MultiMode, LC-SC, 62.5/125 um	0.5M
21.15.9351	MultiMode, LC-SC, 62.5/125 um	1M
21.15.9352	MultiMode, LC-SC, 62.5/125 um	2M
21.15.9353	MultiMode, LC-SC, 62.5/125 um	3M
21.15.9355	MultiMode, LC-SC, 62.5/125 um	5M
21.15.9360	MultiMode, LC-SC, 62.5/125 um	10M

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	06.JAN.2011	Abby	Rotronic Co.,LTd.		
	CHECK	06.JAN.2011	MAER			
	APPROVAL	06.JAN.2011	YTY			
	DATE		NAME	ITEM NO.: 21.15.XXXX 有吊卡		
SCALE		1/1 (A4)	UNIT	mm	DES.: SC to LC Duplex patch cord	
		DRAWING NO.		SFBJC092331xxxx36001(SA1)		
		DRAWING CLASSIFICATION		S	SHEET 1 OF 1	

1

2

0

3

4

10cm

5

6