




Datenblatt - Fiche technique - Data sheet


21.15.9450

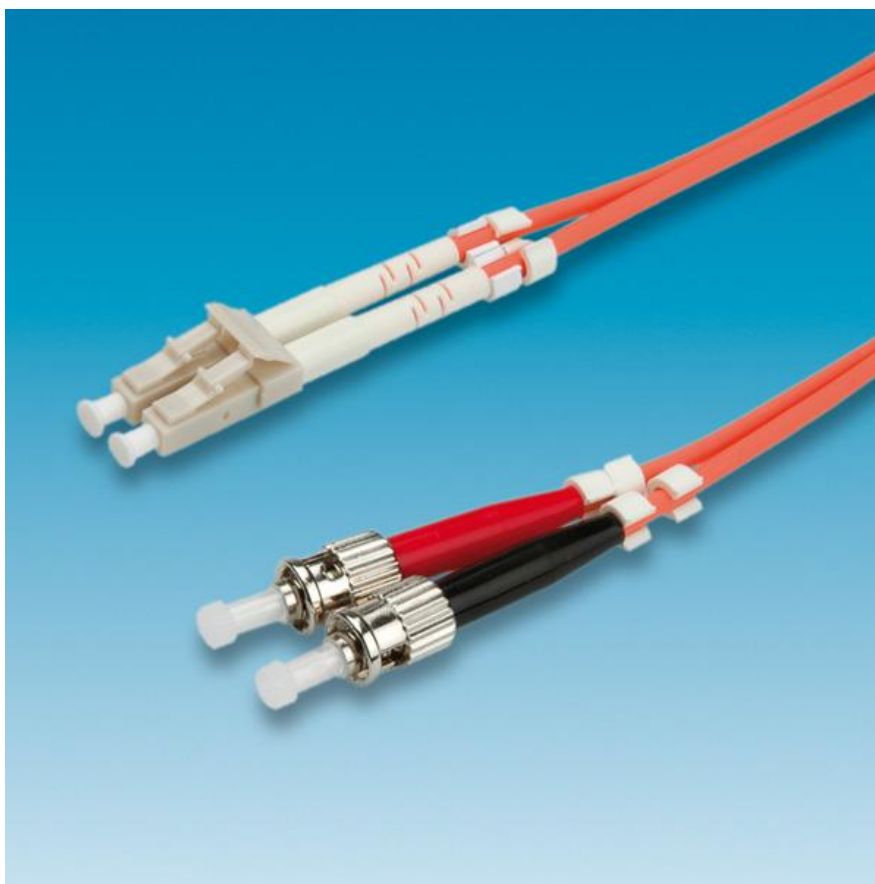

ROLINE LWL-Kabel 62,5/125µm LC/ST, orange, 0,5m

ROLINE Câble patch FO 62,5/125µm LC/ST, orange, 0,5m

ROLINE Fibre Optic Jumper Cable 62.5/125µm LC/ST, orange, 0.5 m

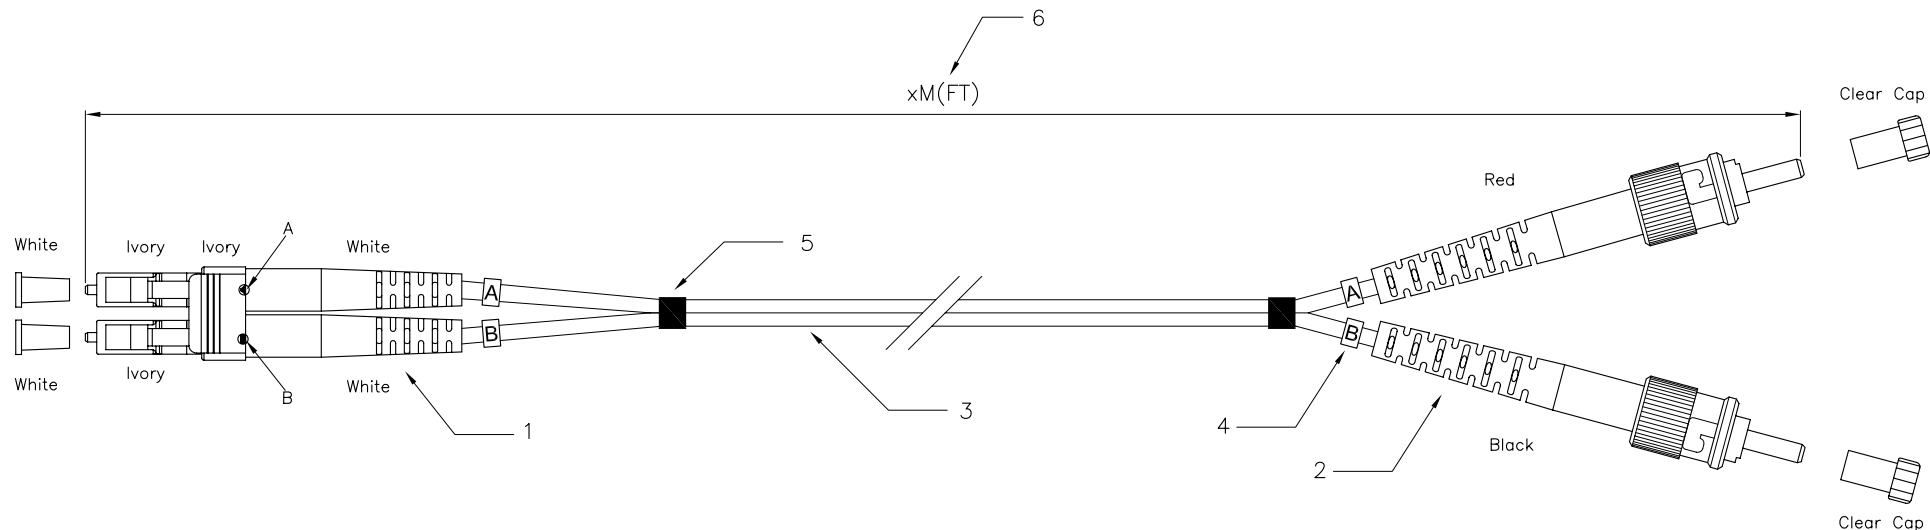

Specification:

1. Connector Type : LC Multimode
2. Connector Type : ST Multimode
3. Cable Type :
 - 3-1. Zipcord Cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode.
 - 3-2. Cable Jacket : Orange Color, PVC Material.
4. Cable Marker
5. Shrink Tube
6. Length : xM(FT)

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. $\phi 1.25\text{mm}$ Ferrule End-face Radius : $7 < R < 25\text{mm}$
 $\phi 2.5\text{mm}$ Ferrule End-face Radius : $8 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature : -20°C to $+70^\circ\text{C}$
- g. Storage Temperature : -40°C to $+80^\circ\text{C}$

Remack#

21.15.9450	MultiMode, LC-ST,62.5/125 um	0.5M
21.15.9451	MultiMode, LC-ST,62.5/125 um	1M
21.15.9452	MultiMode, LC-ST,62.5/125 um	2M
21.15.9453	MultiMode, LC-ST,62.5/125 um	3M
21.15.9455	MultiMode, LC-ST,62.5/125 um	5M
21.15.9460	MultiMode, LC-ST,62.5/125 um	10M

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	06.JAN.2011	Abby	Rotronic Co.,Ltd.		
	CHECK	06.JAN.2011	MAER			
	APPROVAL	06.JAN.2011	YTY			
	DATE		NAME	ITEM NO.: 21.15.XXXX 有吊卡		
	SCALE	1/1 (A4)	UNIT	mm	DES.: ST to LC Duplex patch cord	
DRAWING NO. SFBJC090831xxxx36001(SA1)		DRAWING CLASSIFICATION		S	SHEET	1 OF 1