



Datenblatt - Fiche technique - Data sheet

21.15.9703



ROLINE LWL-Kabel 50/125µm ST/ST, grau, 3m

ROLINE Câble patch FO 50/125µm ST/ST, gris, 3m

ROLINE Fibre Optic Jumper Cable 50/125µm ST/ST, grey, 3 m

1

2

3

4

5

6

A

B


C

D

A

B

C

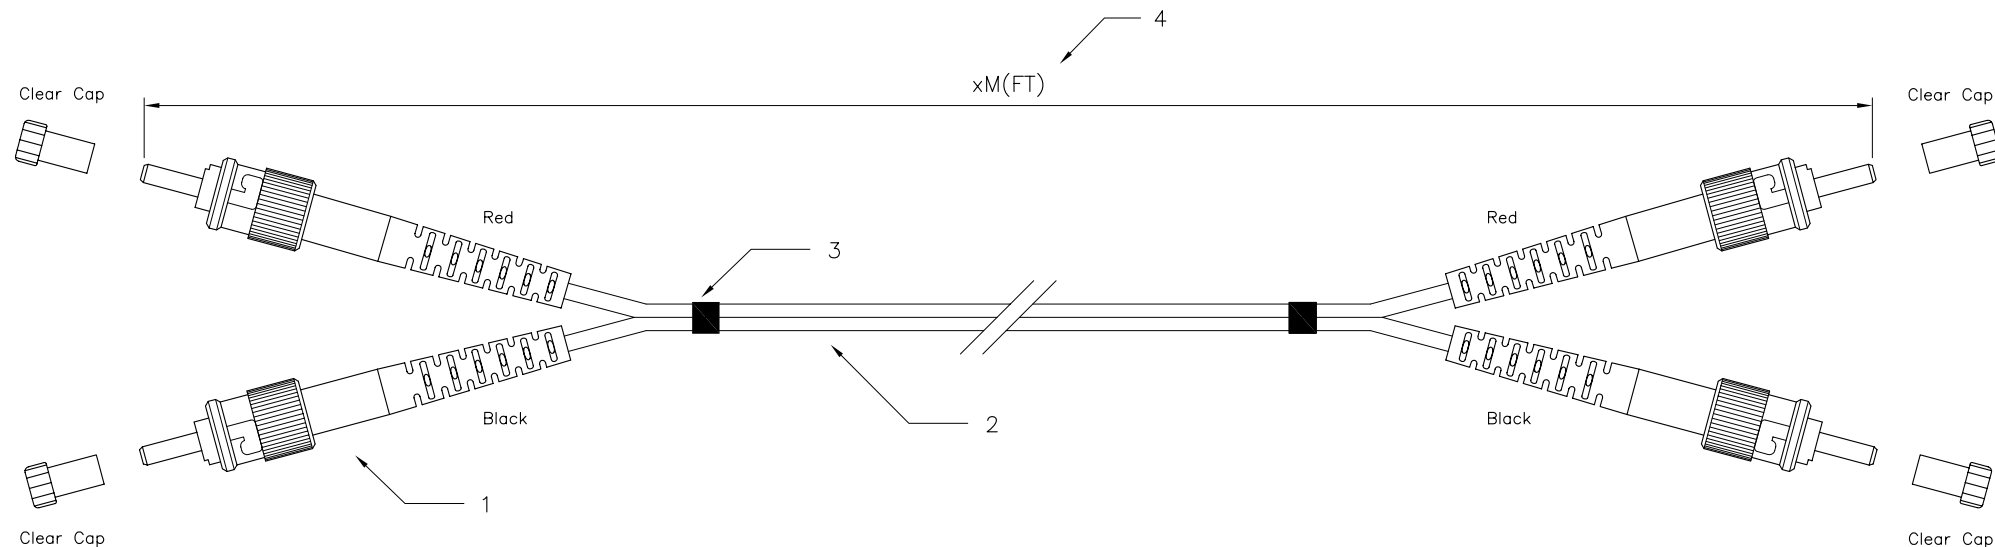

Specification:

1. Connector Type : ST Multimode
2. Cable Type :
 - 2-1. Zipcord Cable, $\phi 3.0\text{mm}$, 50/125um Multimode.
 - 2-2. Cable Jacket : Gray Color, PVC Material.
3. Shrink Tube
4. Length : xM(FT)

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. $\phi 2.5\text{mm}$ Ferrule End-face Radius : $8 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature : -20°C to $+70^{\circ}\text{C}$
- g. Storage Temperature : -40°C to $+80^{\circ}\text{C}$

Remack#

21.15.9700	MultiMode, ST-ST, 50/125 um	0.5M
21.15.9701	MultiMode, ST-ST, 50/125 um	1M
21.15.9702	MultiMode, ST-ST, 50/125 um	2M
21.15.9703	MultiMode, ST-ST, 50/125 um	3M
21.15.9705	MultiMode, ST-ST, 50/125 um	5M
21.15.9710	MultiMode, ST-ST, 50/125 um	10M

GENERAL TOLERANCE OF DIMENSIONS x.xxx ±0.005 x.xx ±0.05 x.x ±0.1	DRAWING		06.JAN.2011		Abby		Rotronic Co.,LTd.						
	CHECK		06.JAN.2011		MAER								
	APPROVAL		06.JAN.2011		YTY								
			DATE		NAME		ITEM NO.: 21.15.XXXX 有吊卡						
	SCALE		1/1 (A4)		UNIT		mm		DES.: ST to SC Duplex patch cord				
		DRAWING NO.		SFBJB020808xxxx06001(SA1)									
		DRAWING CLASSIFICATION		S		SHEET		1 OF 1					

1

2

0

3

4

10cm

5

6