

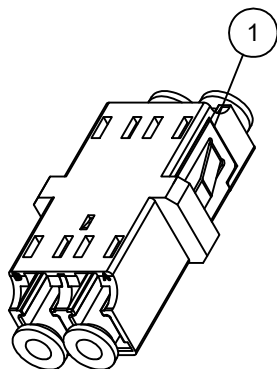


Keystone type LC Adapter

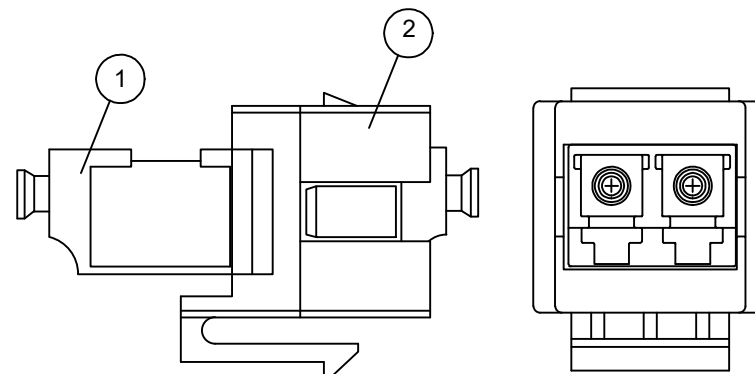

Put the LC duplex adapters into the 19" back panel



ROHS 2.0 and REACH compliant

Insertion Loss(dB)	≤0.30
Operating Temperature(° C)	-40 ~+85
Storage Temperature(° C)	-40 ~+85

MATERIAL LIST:

②	Keystone Type Adapter ABS Black			1pcs		ITEM NO.	DESC.
①	LC Duplex Adapter(SC simplex footprint)Aqua			1pcs		21.17.0001A	ROLINE KEYSTONE Adapter (Black), W/LC Duplex Adapters plastic Aqua
NO.	SPECIFICATION STANDARD			QT' Y	REMARK		
		Adapter convert to one piece		2022-3-17	A1		
		NEW		2018-1-11	A		
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.		