



Datenblatt - Fiche technique - Data sheet


21.17.0105




ROLINE LWL-Adapter ST zu SC Simplex, Multimode, PB

ROLINE Raccord optique ST / SC simplex multimode (PB), F





ROLINE Fibre Optic Adapter ST/SC Simplex Multimode, PB

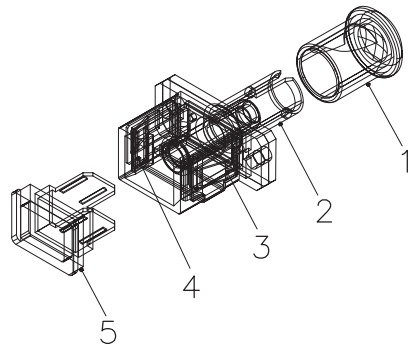

SCALE 1/1



SUGGESTED PANEL CUTOUT

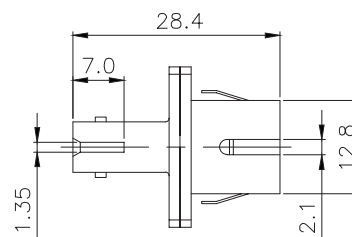

Specification :


Material :

1. Dust Cover : PVC, Black color.
2. Housing : PBT, UL 94V-0.
3. Clip : Stainless.
4. Holder : PBT, UL 94V-0.
5. SC Dust Cover : PP, Black color.

Performance :

- a. ST to SC Simplex Type.
- b. Durability : 500 cycles.
- c. Tensile Strength : 10 kgf.
- d. Insertion Loss : <0.2 dB(Singlemode)/0.3 dB(Multimode).
- e. Operating Temperature : -20°C to +70°C.
- f. Storage Temperature: -40°C to +80°C.

NEW ITEM NO	ITEM NO	Description
ADCBC2111000007	21.17.0101R	Blue, ST to SC SM Adaptor With Zr. sleeve.
ADCBC2212000107	21.17.0105R	Blue, ST to SC MM Adaptor With PB sleeve.

NO.	DESCRIPTION	P/N.	MATERIAL	Q'TY
"#": Matching DIM.	DRAWING	31.Mar.2015	byz	
"*": Important DIM.	CHECK	31.Mar.2015	Jane	
Others General DIM.	APPROVAL	31.Mar.2015	Jaimy	
GENERAL TOLERANCE OF DIMENSIONS	DATE	NAME	ITEM NO.: 21.17.XXXXX	
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	SCALE 1/1 (A4)	UNIT mm	DES.: ST to SC Adaptor-Simplex Type	
		DRAWING NO.	DRAWING CLASSIFICATION	
			S	SHEET 1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1

2

0

3

4

10cm

5

6

A1