


AP-FXC-0400


4-Port Indoor FE PoE Extender

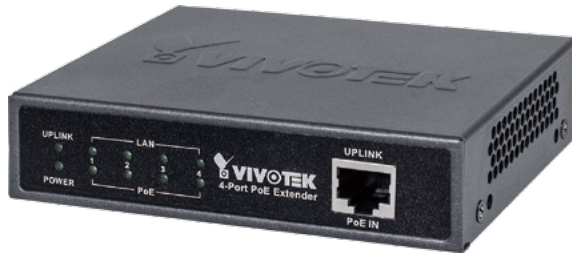


Technical Specifications

Model	AP-FXC-0400	Filtering/Forwarding Rates	
PoE Extension		10 Mbps	14,880 pps
Extension Distance	Max. 200 M (No Local Power Required)*	100 Mbps	148,000 pps
PoE Output	30 W	Transmission Media	
Bandwidth	Max. 100 Mbps	10 Base T	Cat. 3, 4, 5 UTP/STP
IP Camera Compatibility		100 Base TX	Cat. 5, 5E UTP/STP
Video Resolution	Megapixel/D1/VGA	PoE Function	
Video Compression	MJPEG/MPEG-4/H.264/H.265	PSE PoE Fast Ethernet (RJ45)	4
Compatible Camera List	VIVOTEK Network Cameras	PD PoE Fast Ethernet (RJ45)	1
Ethernet		Power over Ethernet Output Compatible 802.3at/af Standard	
Fast Ethernet (RJ45)	5	Pin Assignment and Polarity:1/2 (+), 3/6 (-) Output Power Voltage:45-55VDC	
Standards		Output PoE PD Auto Detection	
IEEE 802.3 10-BASE-T (Ethernet)	Supported	Yes	
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported	Power over Ethernet Input Compatible 802.3at/af Passive & Standard	
IEEE 802.3x Flow Control (Full-duplex Flow Control)	Supported	Supports Alternatives Mode A or Mode B or Mode A+B Input Voltage: 46-57 VDC Max. Input Current: 0.7A/1.4A	
IEEE 802.3af Power over Ethernet	Supported	General	
IEEE 802.3at Power over Ethernet Plus	Supported	LED Indicators	
Ethernet Performance		Power, PoE PD IN, PoEx4, LAN x4	
MAC Address	1 K	Dimensions	
Buffer Memory	48 KB	120 (L) x 90 (W) x 28 (H) mm	
Transmission Method	Store and Forward	Weight	
Backplane	1.0 Gbps	0.4 kg	
Auto-MDI/MDI-X, Auto-Negotiation	Supported	Operating Temperature	
		0°C ~ 50°C (32°F ~ 122°F)	
		Storage Temperature	
		-20°C ~ 70°C (-4°F ~ 158°F)	
		Humidity	
		Operating: 10~90% (Non-condensing) Storage: 10~90% (Non-condensing)	
		Safety Certifications	
		CE, C-Tick, FCC, VCCI	
		Accessory	
		Included Accessories	
		QJG, Screw	

Dimensions

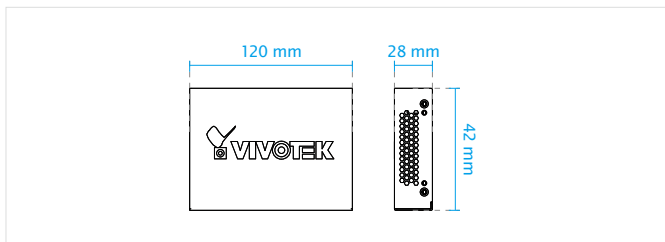

Application Diagram

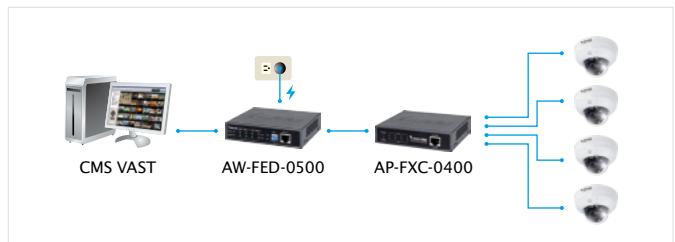

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 4