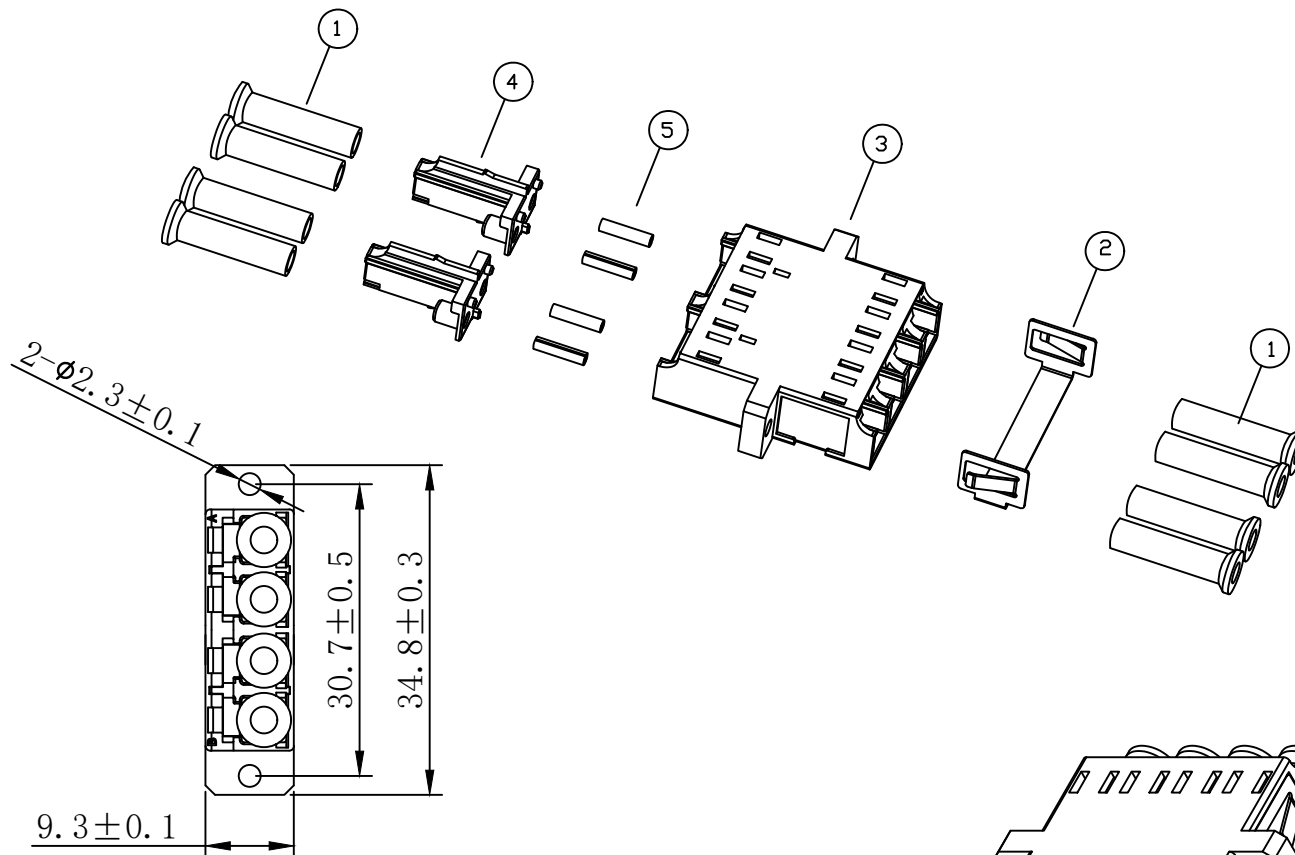
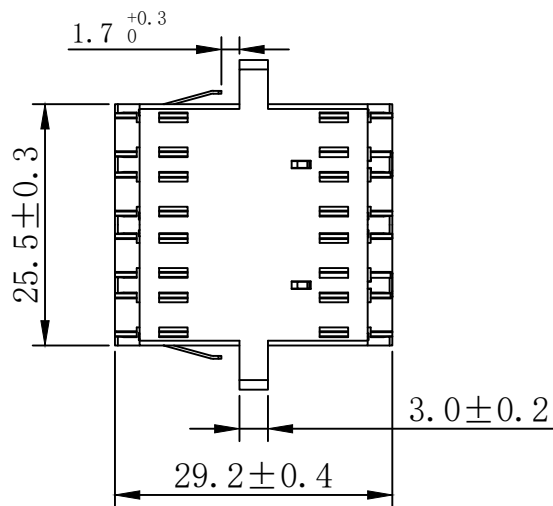


NOTE:
RoHS 2.0 & REACH COMPLIANT

Insertion Loss (typical) (dB)	≤0.12
Insertion Loss (dB)	≤0.20
Operating Temperature(° C)	-40 ~+80
Storage Temperature(° C)	-40 ~+85

⑤	LC Sleeve ceramic		4pcs	
④	LC Aqua bush		2pcs	
③	LC Aqua Body Quad (SC Duplex footprint)		1PC	
②	LC Metal Mount (SC Duplex footprint)		1PC	
①	LC White Dust Cap		8pcs	
NO.	SPECIFICATION STANDARD		QT' Y	REMARK
		Convert to one piece	2022-3-17	A1
		NEW	2018-2-9	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	DESC.
21.99.0660A	ROLINE Adaptor LC quad with flange OM3

SECOMP