




Datenblatt - Fiche technique - Data sheet


21.99.9252

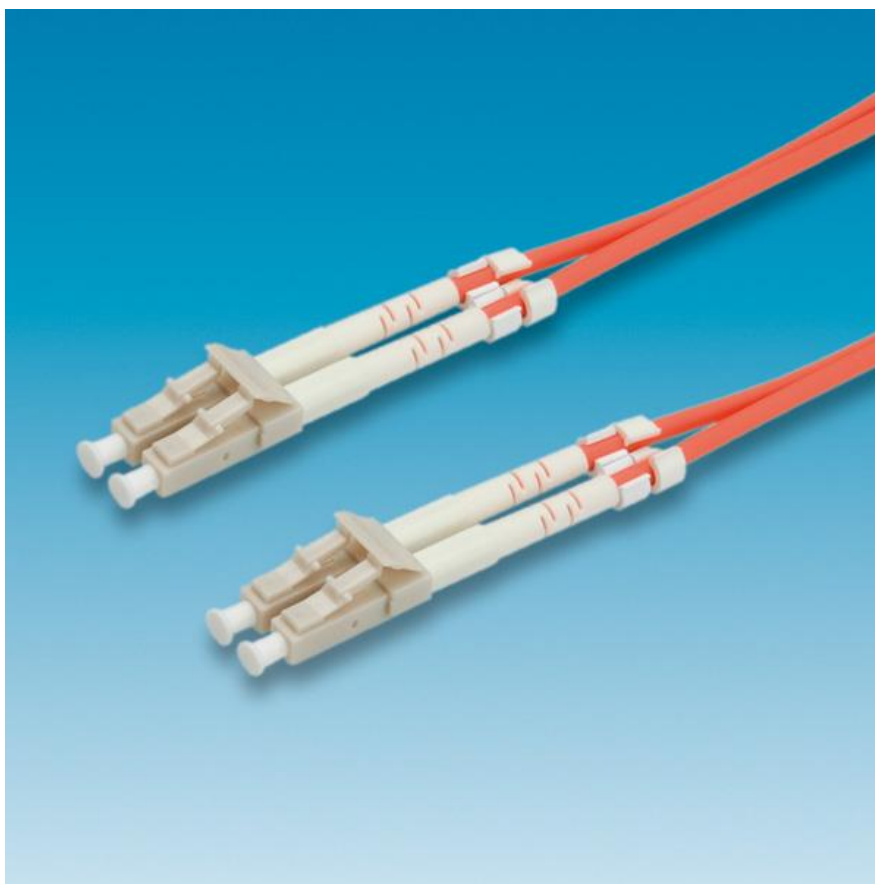

VALUE LWL-Kabel 62,5/125µm LC/LC, orange, 2m

VALUE Câble patch FO 62,5/125µm LC/LC, orange, 2m

VALUE Fibre Optic Jumper Cable 62,5/125µm LC/LC, orange, 2 m

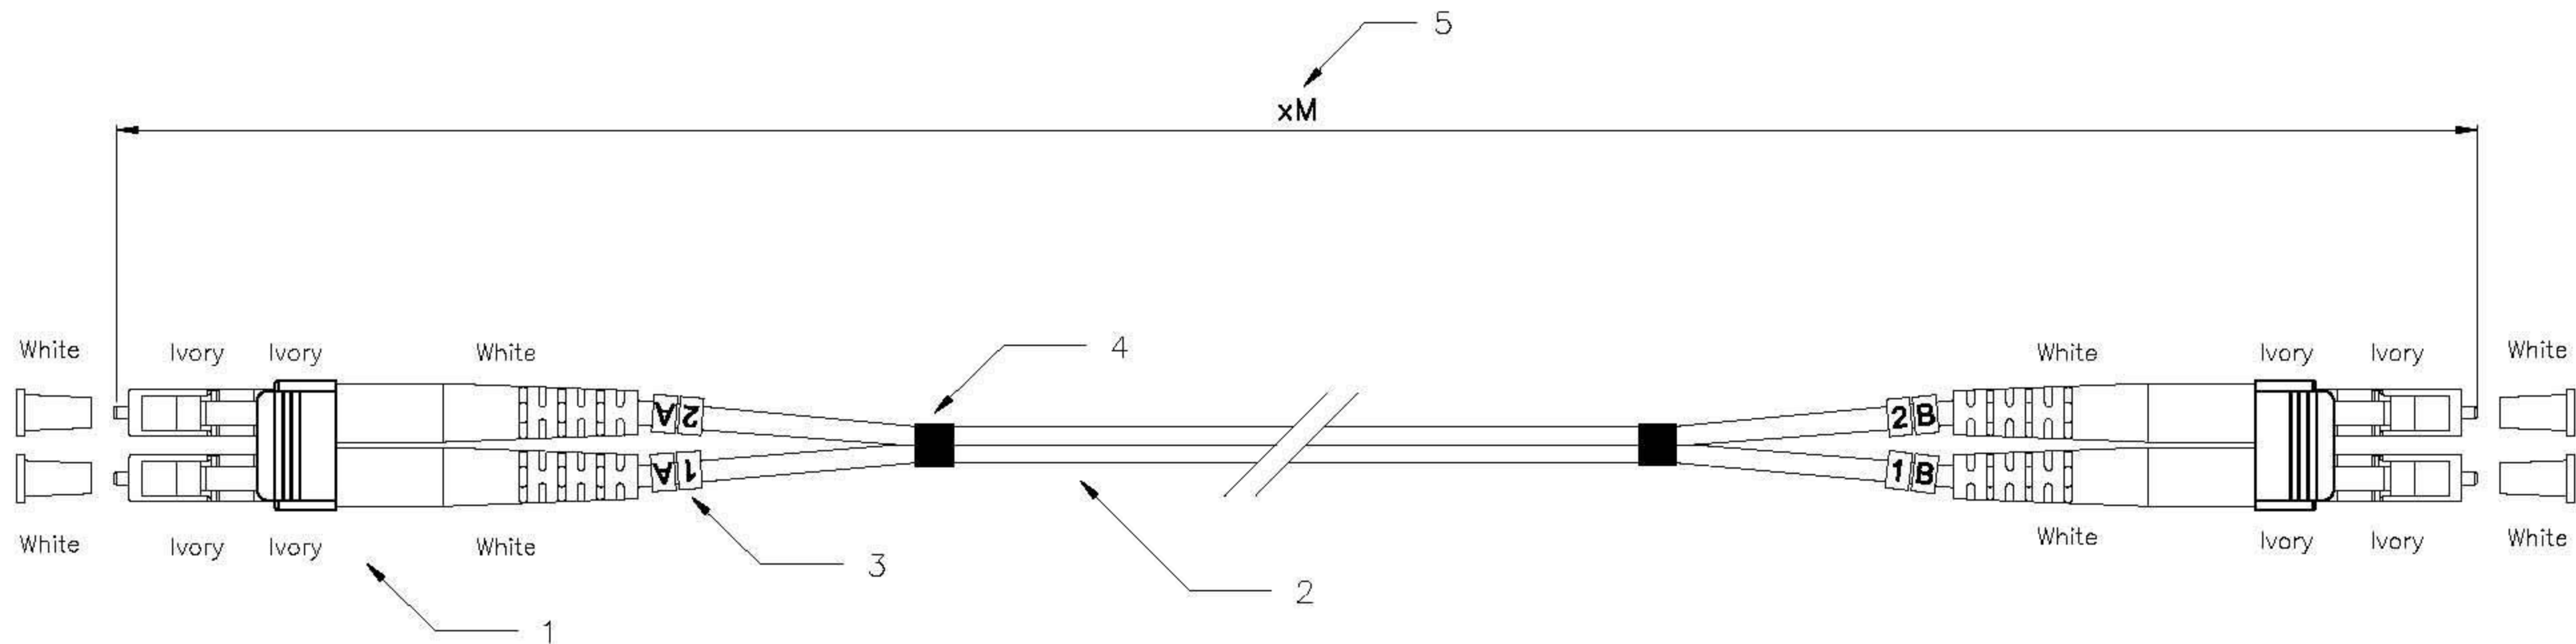

Specification:

1. Connector Type : LC Multimode
2. Cable Type :
 - 2-1 Zipcord cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode
 - 2-2 Calbe Jacket : Orange color, PVC material
3. Cable Marker
4. Shrink Tube
5. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\text{um} < H < +0.05\text{um}$
- c. Ferrule End-face Radius : $7 < R < 25\text{mm}$
- d. Apex Offset : $< 50\text{um}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operation Temperature : -20° to $+70^{\circ}$
- g. Storage Temperature : -40° to $+80^{\circ}$

Remark#

21.15.9252	ROLINE FO Cab.,62.5/125,LC-LC,orange,2m
21.15.9253	ROLINE FO Cab.,62.5/125,LC-LC,orange,3m
21.15.9255	ROLINE FO Cab.,62.5/125,LC-LC,orange,5m
21.15.9260	ROLINE FO Cab.,62.5/125,LC-LC,orange,10m
21.99.9251	VALUE FO Cab.,62.5/125,LC-LC,orange,1m
21.99.9252	VALUE FO Cab.,62.5/125,LC-LC,orange,2m
21.99.9253	VALUE FO Cab.,62.5/125,LC-LC,orange,3m
21.99.9255	VALUE FO Cab.,62.5/125,LC-LC,orange,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		17.MAR.2009	Connie	rotronic		
	CHECK		17.MAR.2009	KLi			
	APPROVAL		17.MAR.2009	Yty			
			DATE	NAME	ITEM NO.: 21.15.XXXX有吊卡・21.99.XXXX無吊卡		
	SCALE	1/1 (A4)	UNIT	mm	DES.: LC to LC Duplex patch cord		
			DRAWING NO.		AFAJC093131XXXX(SA1)		
			DRAWING CLASSIFICATION			SHEET	