



Datenblatt - Fiche technique - Data sheet


21.99.9302



VALUE LWL-Kabel 62,5/125µm SC/SC, orange, 2m

VALUE Câble patch FO 62,5/125µm SC/SC, orange, 2m

VALUE Fibre Optic Jumper Cable 62,5/125µm SC/SC, orange, 2 m

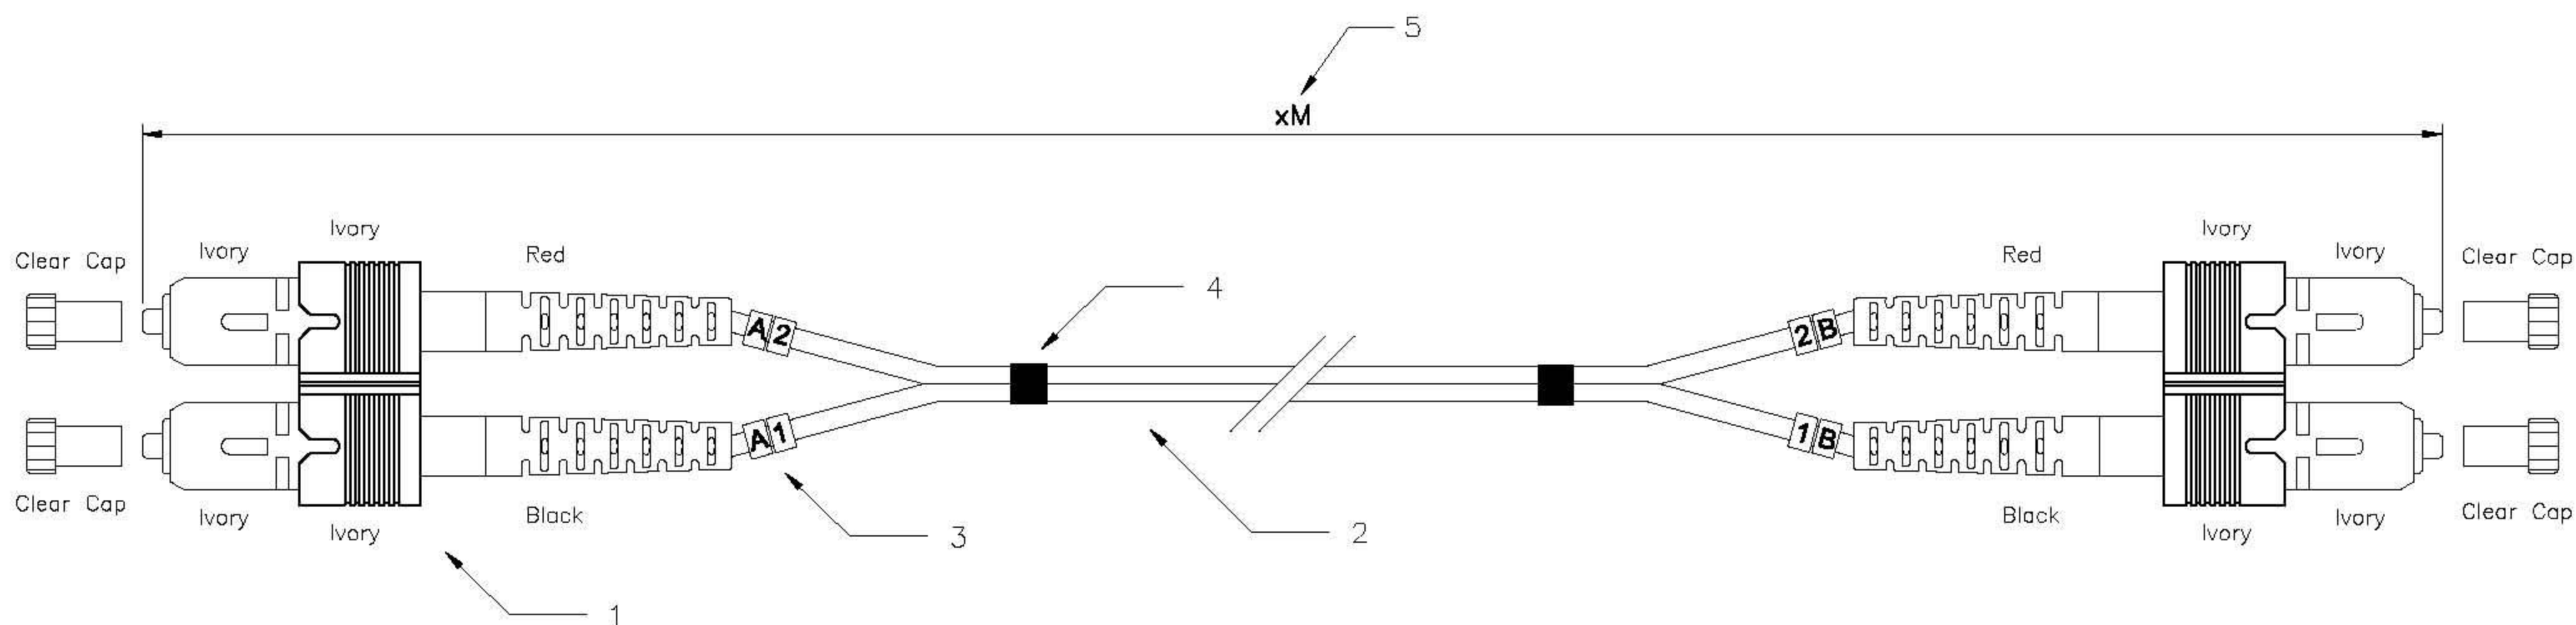

Specification:


1. Connector Type : SC Multimode
2. Cable Type :
 - 2-1 Zipcord cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode
 - 2-2 Calbe Jacket : Orange color, PVC material
3. Cable Marker
4. Shrink Tube
5. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\text{um} < H < +0.05\text{um}$
- c. Ferrule End-face Radius : $10 < R < 25\text{mm}$
- d. Apex Offset : $< 50\text{um}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operation Temperature : $-20^{\circ} \text{ to } +70^{\circ}$
- g. Storage Temperature : $-40^{\circ} \text{ to } +80^{\circ}$

Remark#

21.15.9302	ROLINE FO Cab.,62.5/125,SC-SC,orange,2m
21.15.9303	ROLINE FO Cab.,62.5/125,SC-SC,orange,3m
21.15.9305	ROLINE FO Cab.,62.5/125,SC-SC,orange,5m
21.15.9309	ROLINE FO Cab.,62.5/125,SC-SC,orange,10m
21.99.9302	VALUE FO Cab.,62.5/125,SC-SC,orange,2m
21.99.9303	VALUE FO Cab.,62.5/125,SC-SC,orange,3m
21.99.9305	VALUE FO Cab.,62.5/125,SC-SC,orange,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		17.MAR.2009		Connie		rotronic				
	CHECK		17.MAR.2009		KLi						
	APPROVAL		17.MAR.2009		Yty						
			DATE		NAME		ITEM NO.: 21.15.XXXX有吊卡, 21.99.XXXX無吊卡				
	SCALE		1/1 (A4)		UNIT		mm		DES.: SC to SC Duplex patch cord		
		DRAWING NO.		AFAJC091515XXXX(SA1)							
		DRAWING CLASSIFICATION				SHEET		1 OF 1			