



Datenblatt - Fiche technique - Data sheet


21.99.9403



VALUE LWL-Kabel 62,5/125µm ST/ST, orange, 3m

VALUE Câble patch FO 62,5/125µm ST/ST, orange, 3m

VALUE Fibre Optic Jumper Cable 62,5/125µm ST/ST, orange, 3 m

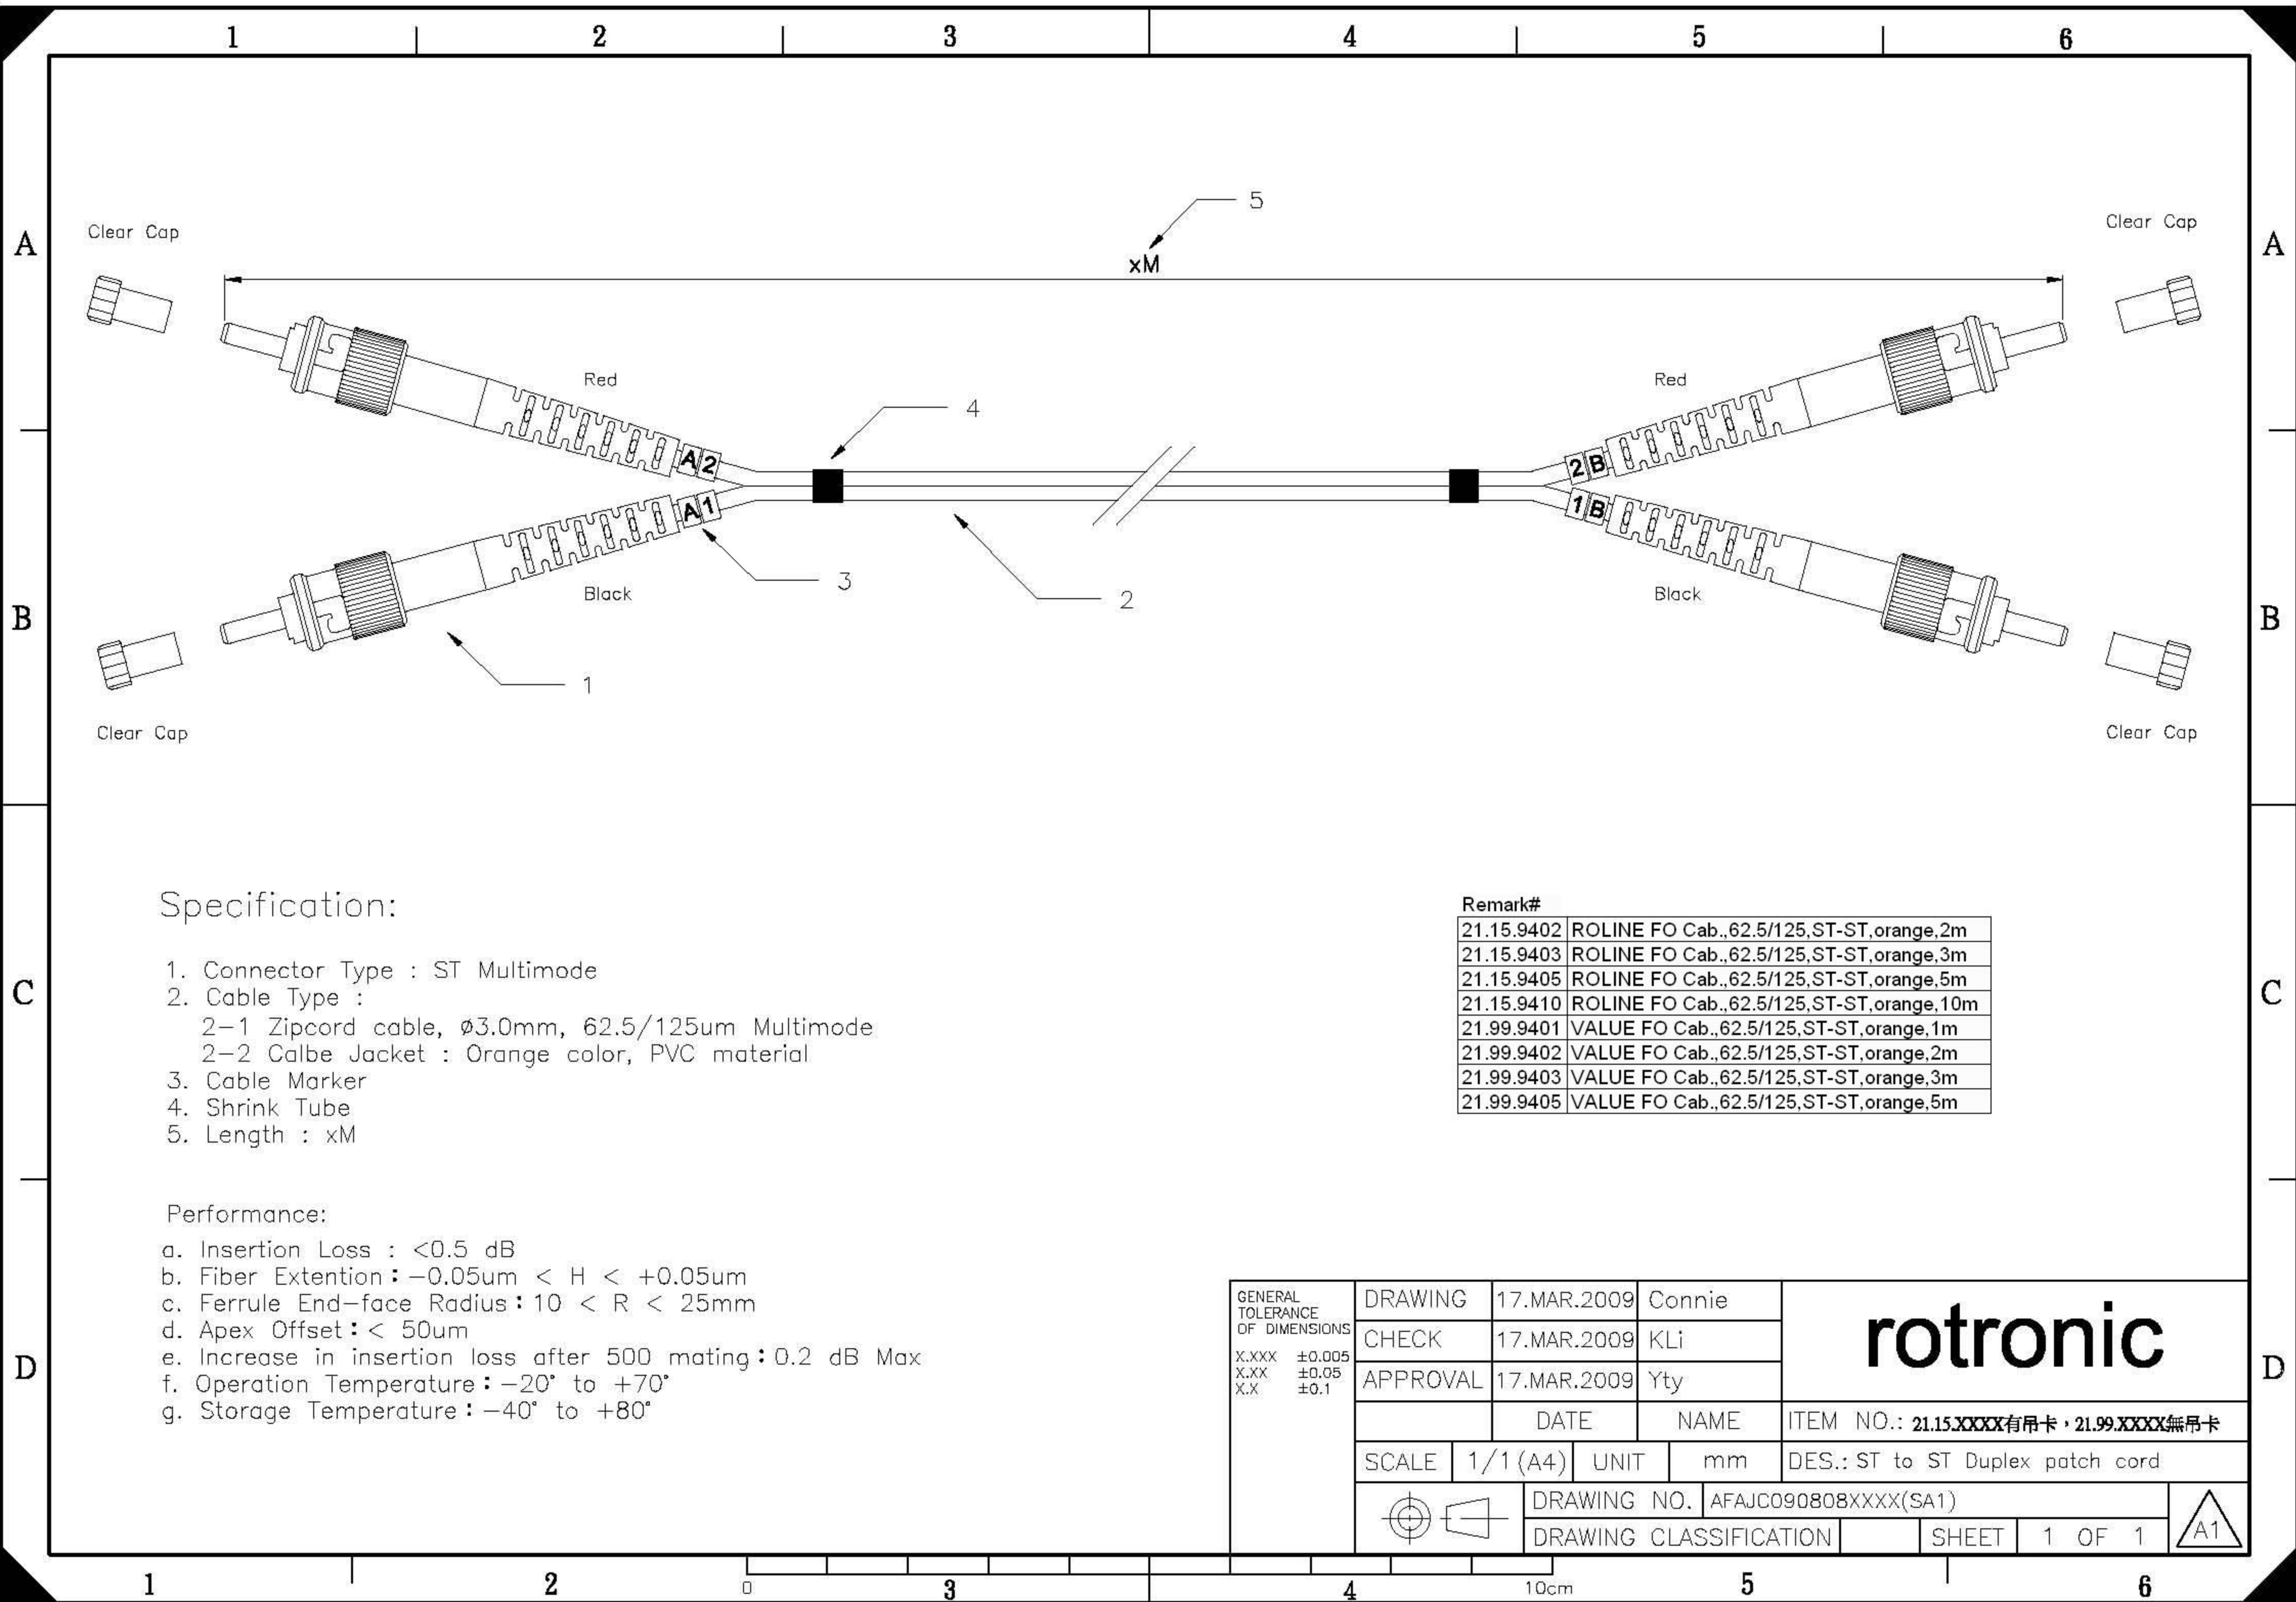

Specification:

- Connector Type : ST Multimode
- Cable Type :
 - 2-1 Zipcord cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode
 - 2-2 Cable Jacket : Orange color, PVC material
- Cable Marker
- Shrink Tube
- Length : xM

Performance:

- Insertion Loss : $< 0.5 \text{ dB}$
- Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- Ferrule End-face Radius : $10 < R < 25\text{mm}$
- Apex Offset : $< 50\mu\text{m}$
- Increase in insertion loss after 500 mating : 0.2 dB Max
- Operation Temperature : -20° to $+70^{\circ}$
- Storage Temperature : -40° to $+80^{\circ}$

Remark#

21.15.9402	ROLINE FO Cab.,62.5/125,ST-ST,orange,2m
21.15.9403	ROLINE FO Cab.,62.5/125,ST-ST,orange,3m
21.15.9405	ROLINE FO Cab.,62.5/125,ST-ST,orange,5m
21.15.9410	ROLINE FO Cab.,62.5/125,ST-ST,orange,10m
21.99.9401	VALUE FO Cab.,62.5/125,ST-ST,orange,1m
21.99.9402	VALUE FO Cab.,62.5/125,ST-ST,orange,2m
21.99.9403	VALUE FO Cab.,62.5/125,ST-ST,orange,3m
21.99.9405	VALUE FO Cab.,62.5/125,ST-ST,orange,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	17.MAR.2009	Connie	rotronic	
	CHECK	17.MAR.2009	KLi		
	APPROVAL	17.MAR.2009	Yty		
		DATE	NAME	ITEM NO.: 21.15.XXXX有吊卡・21.99.XXXX無吊卡	
	SCALE	1/1 (A4)	UNIT	mm	DES.: ST to ST Duplex patch cord
	DRAWING NO.		AFAJC090808XXXX(SA1)		
	DRAWING CLASSIFICATION		SHEET	1 OF 1	A1