




Datenblatt - Fiche technique - Data sheet


21.99.9450

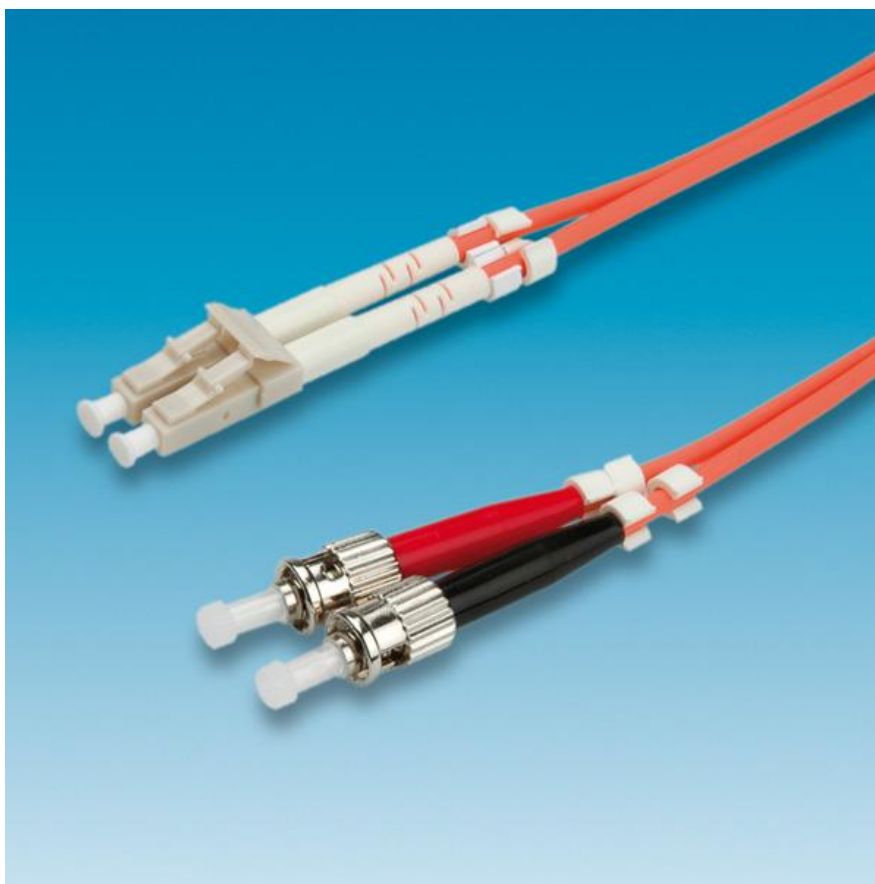

VALUE LWL-Kabel 62,5/125µm LC/ST, orange, 0,5m

VALUE Câble patch FO 62,5/125µm LC/ST, orange, 0,5m

VALUE Fibre Optic Jumper Cable 62,5/125µm LC/ST, orange, 0.5 m

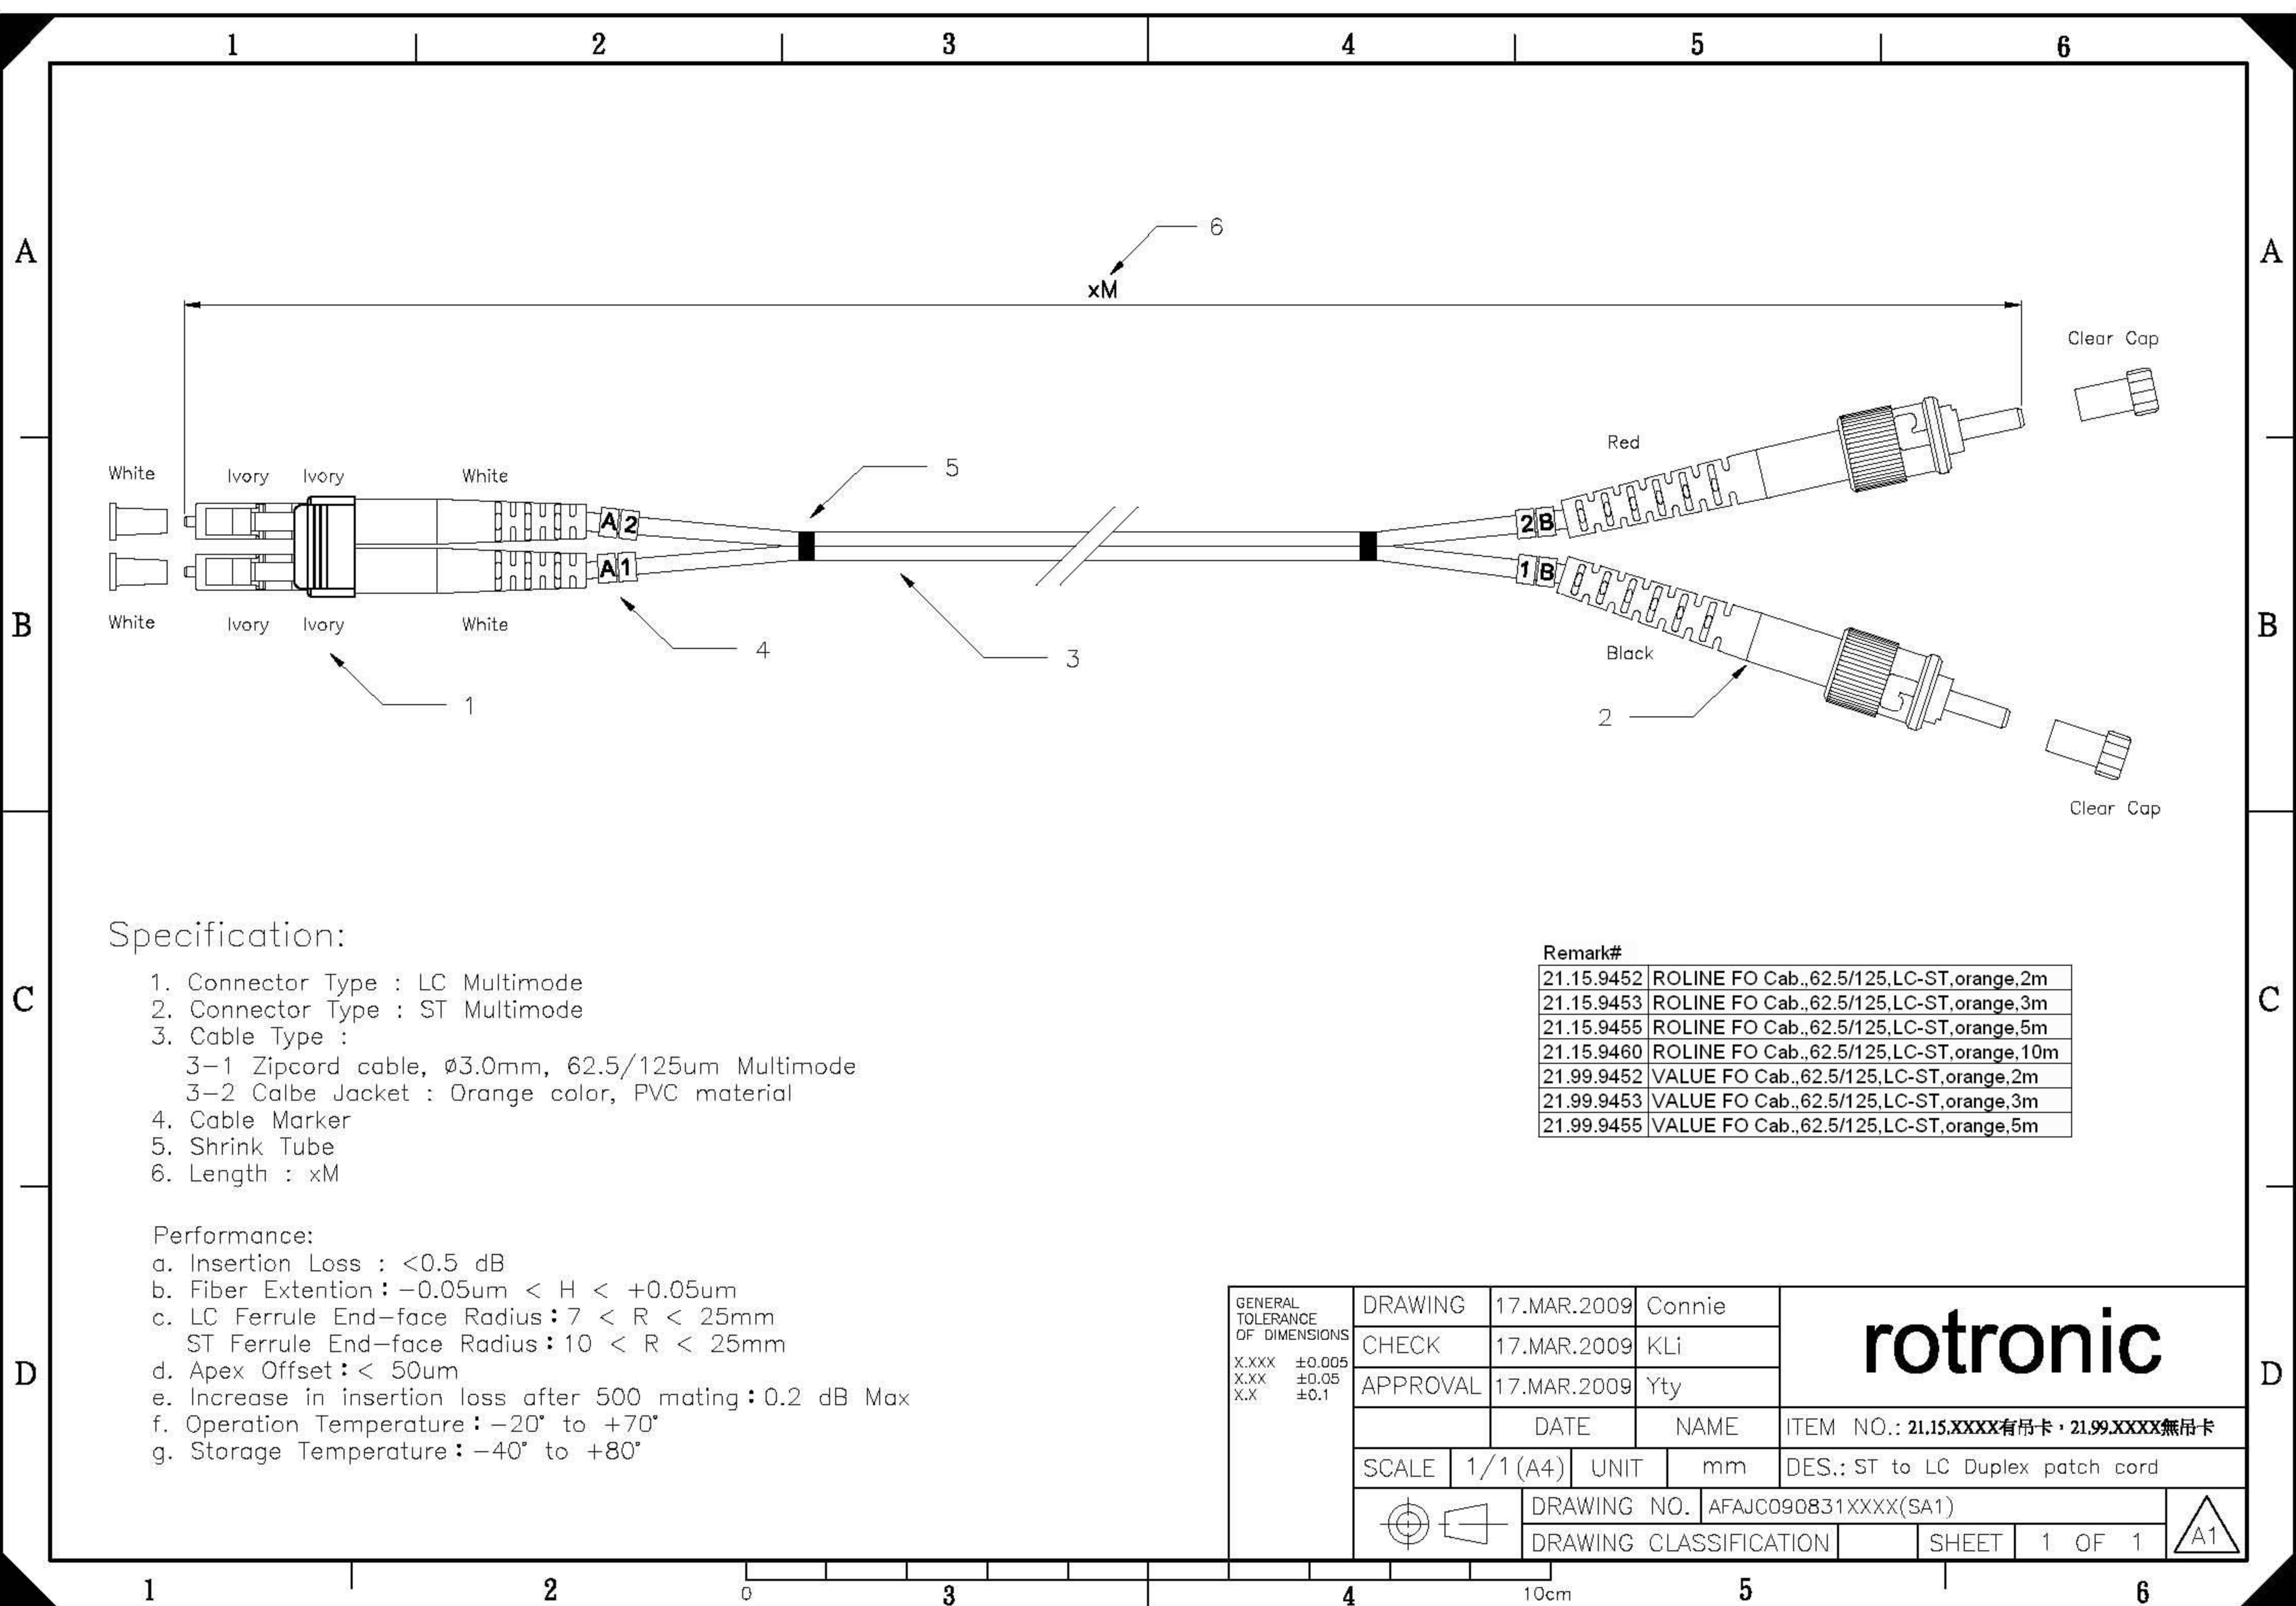

Specification:


1. Connector Type : LC Multimode
2. Connector Type : ST Multimode
3. Cable Type :
3-1 Zipcord cable, $\varnothing 3.0\text{mm}$, 62.5/125um Multimode
3-2 Calbe Jacket : Orange color, PVC material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\text{um} < H < +0.05\text{um}$
- c. LC Ferrule End-face Radius : $7 < R < 25\text{mm}$
ST Ferrule End-face Radius : $10 < R < 25\text{mm}$
- d. Apex Offset : $< 50\text{um}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operation Temperature : -20° to $+70^{\circ}$
- g. Storage Temperature : -40° to $+80^{\circ}$

Remark#

21.15.9452	ROLINE FO Cab.,62.5/125,LC-ST,orange,2m
21.15.9453	ROLINE FO Cab.,62.5/125,LC-ST,orange,3m
21.15.9455	ROLINE FO Cab.,62.5/125,LC-ST,orange,5m
21.15.9460	ROLINE FO Cab.,62.5/125,LC-ST,orange,10m
21.99.9452	VALUE FO Cab.,62.5/125,LC-ST,orange,2m
21.99.9453	VALUE FO Cab.,62.5/125,LC-ST,orange,3m
21.99.9455	VALUE FO Cab.,62.5/125,LC-ST,orange,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		17.MAR.2009		Connie		rotronic					
	CHECK		17.MAR.2009		KLi							
	APPROVAL		17.MAR.2009		Yty							
			DATE		NAME		ITEM NO.: 21.15.XXXX有吊卡・21.99.XXXX無吊卡					
	SCALE		1/1 (A4)		UNIT		mm		DES.: ST to LC Duplex patch cord			
			DRAWING NO.		AFAJC090831XXXX(SA1)							
DRAWING CLASSIFICATION					SHEET		1 OF 1					