Datenblatt - Fiche technique - Data sheet

21.99.9855

VALUE LWL-Kabel 50/125µm LC/SC, grau, 5m

VALUE Câble patch FO 50/125µm LC/SC, gris, 5m

VALUE Fibre Optic Jumper Cable 50/125µm LC/SC, grey, 5 m

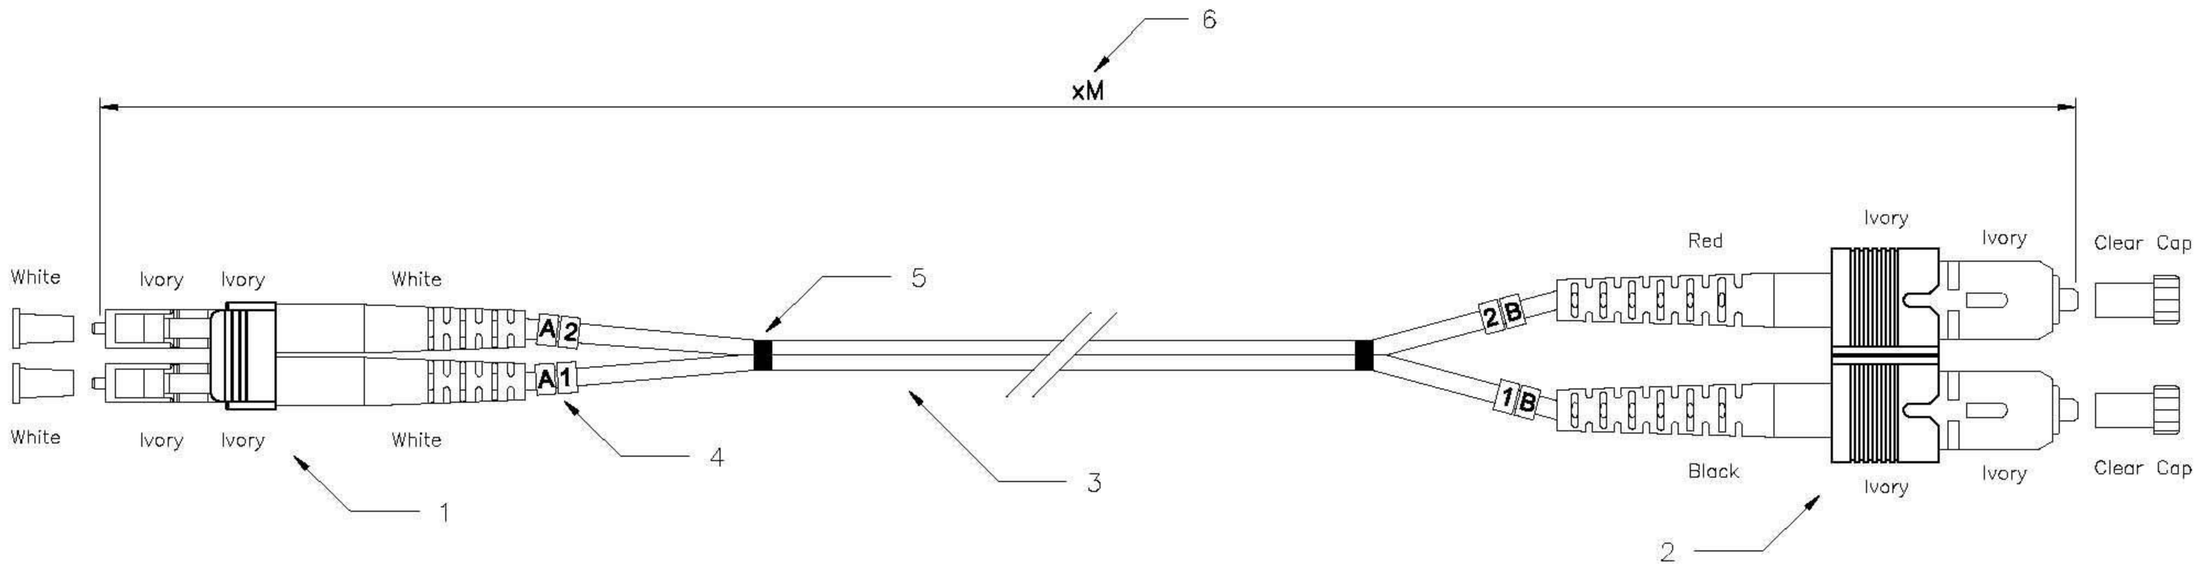

Specification:

1. Connector Type : LC Multimode
2. Connector Type : SC Multimode
3. Cable Type :
   3–1 Zipcord cable, ø3.0mm, 50/125um Multimode
   3–2 Calbe Jacket : Gray color, PVC material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

a. Insertion Loss : <0.5 dB
b. Fiber Extention : −0.05um < H < +0.05um
c. LC Ferrule End–face Radius : 7 < R < 25mm
   SC Ferrule End–face Radius : 10 < R < 25mm
d. Apex Offset : < 50um
e. Increase in insertion loss after 500 mating : 0.2 dB Max
f. Operation Temperature : −20° to +70°
g. Storage Temperature : −40° to +80°

21.99.9852	VALUE FO Cab.,50/125,LC-SC,grey,2m
21.99.9853	VALUE FO Cab.,50/125,LC-SC,grey,3m
21.99.9855	VALUE FO Cab.,50/125,LC-SC,grey,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	17.MAR.2009	Connie	rotronic
	CHECK	17.MAR.2009	KLi	
	APPROVAL	17.MAR.2009	Yty	
		DATE	NAME	ITEM NO.: 21.15.XXXX有吊卡，21.99.XXXX無吊卡
	SCALE 1/1 (A4)	UNIT	mm	DES.: SC to LC Duplex patch cord
	DRAWING NO.	AFAJB021531XXXX(SA1)		A1
	DRAWING CLASSIFICATION		SHEET 1 OF 1	