



Datenblatt - Fiche technique - Data sheet


21.99.9900



VALUE LWL-Kabel 50/125µm SC/SC, grau, 0,5m

VALUE Câble patch FO 50/125µm SC/SC, gris, 0,5m

VALUE Fibre Optic Jumper Cable 50/125µm SC/SC, grey, 0.5 m

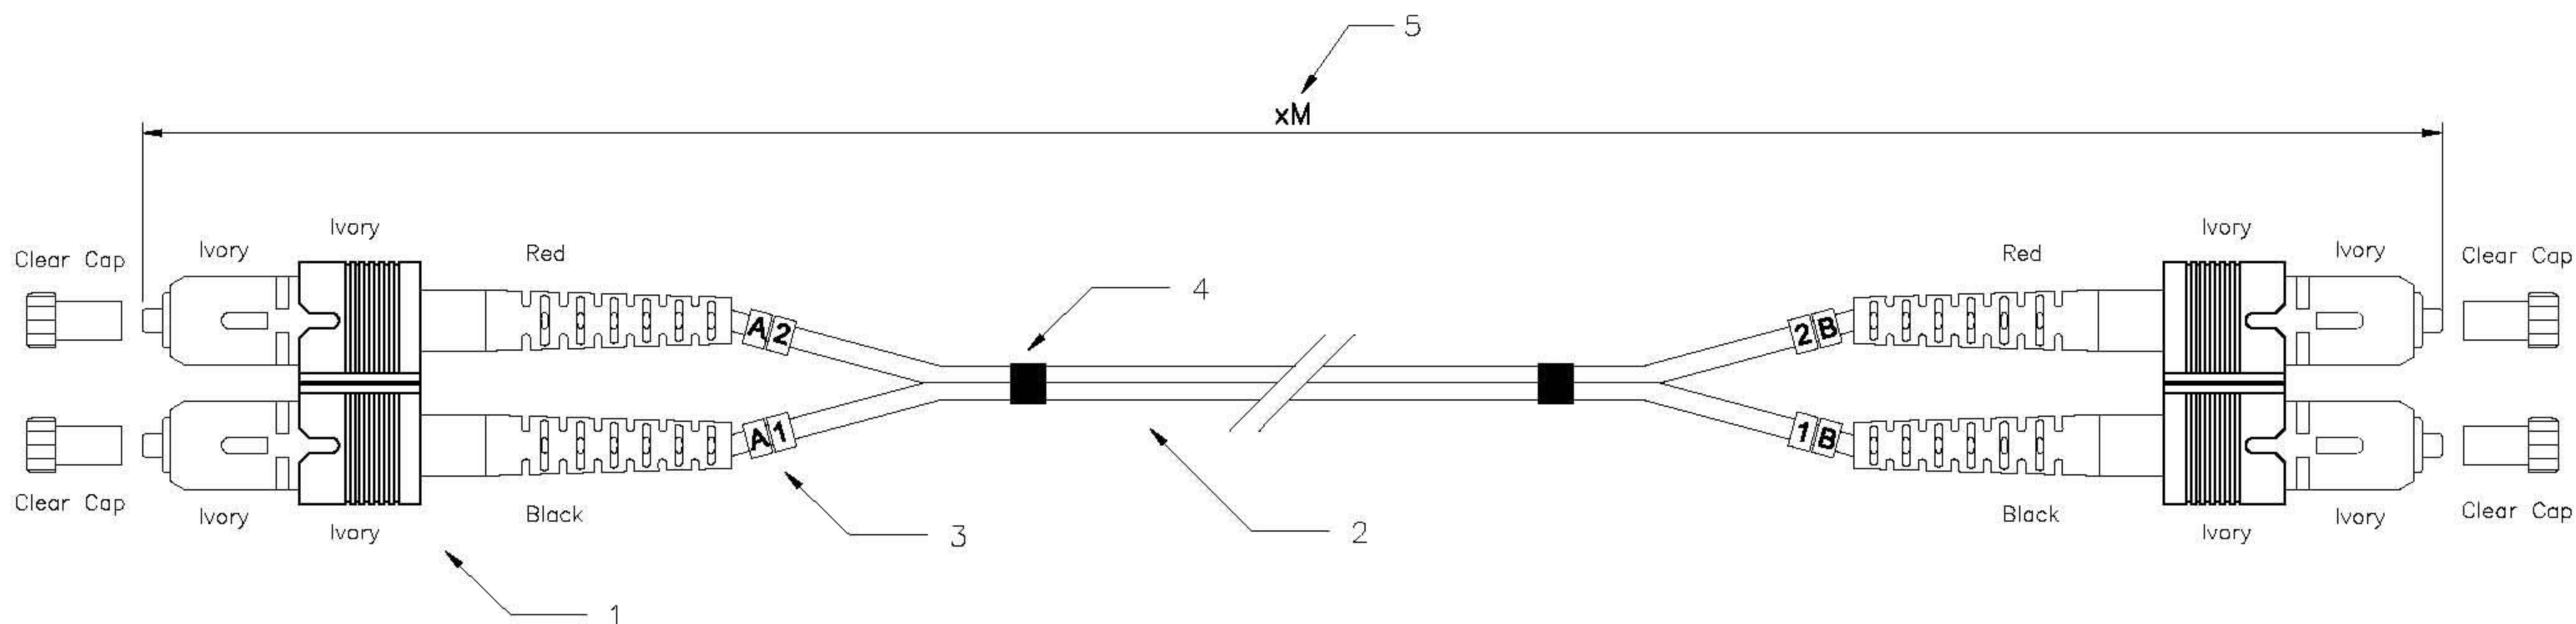

Specification:


1. Connector Type : SC Multimode
2. Cable Type :
 - 2-1 Zipcord cable, $\phi 3.0\text{mm}$, 50/125um Multimode
 - 2-2 Calbe Jacket : Gray color, PVC material
3. Cable Marker
4. Shrink Tube
5. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\text{um} < H < +0.05\text{um}$
- c. Ferrule End-face Radius : $10 < R < 25\text{mm}$
- d. Apex Offset : $< 50\text{um}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operation Temperature : $-20^\circ \text{ to } +70^\circ$
- g. Storage Temperature : $-40^\circ \text{ to } +80^\circ$

Remark#

21.15.9902	ROLINE FO Cab.,50/125,SC-SC,gre,2m
21.15.9903	ROLINE FO Cab.,50/125,SC-SC,gre,3m
21.15.9905	ROLINE FO Cab.,50/125,SC-SC,gre,5m
21.15.9910	ROLINE FO Cab.,50/125,SC-SC,gre,10m
21.99.9902	VALUE FO Cab.,50/125,SC-SC,gre,2m
21.99.9903	VALUE FO Cab.,50/125,SC-SC,gre,3m
21.99.9905	VALUE FO Cab.,50/125,SC-SC,gre,5m

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		17.MAR.2009		Connie		rotronic				
	CHECK		17.MAR.2009		KLi						
	APPROVAL		17.MAR.2009		Yty						
			DATE		NAME		ITEM NO.: 21.15.XXXX有吊卡, 21.99.XXXX無吊卡				
	SCALE	1/1 (A4)		UNIT	mm		DES.: SC to SC Duplex patch cord				
			DRAWING NO.		AFAJB021515XXXX(SA1)						
		DRAWING CLASSIFICATION				SHEET		1 OF 1			

