

Notes:
Electrical:
CAT.5E PERMANENT LINK : ISO 11801 PL Max ClassD



Electrical Specifications:
Insulation Resistance: 500M ohms (min.)
Contact Resistance: 20m ohms (max.)
Current Rating : 1.5 Amps.
DC Resistance: 0.1 ohms(max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz/ 1 min.

Mechanical Specifications:
IDC Punch Down Cycle : Over 25 Cycles (min.)
RJ-45 Jack Insertion Cycle : Over 200 Cycles (min.)

- Accessory:
1.M3 Screw Set, For Pre-Assembled Ground Wire
2. Cable Tie(75X1.9mm)X24Pcs
3. Instruction Sheet
4.M5X12 Screws X4PCS

Color:Black RAL 9005
ROHS & REACH Compliant

Pin Out:

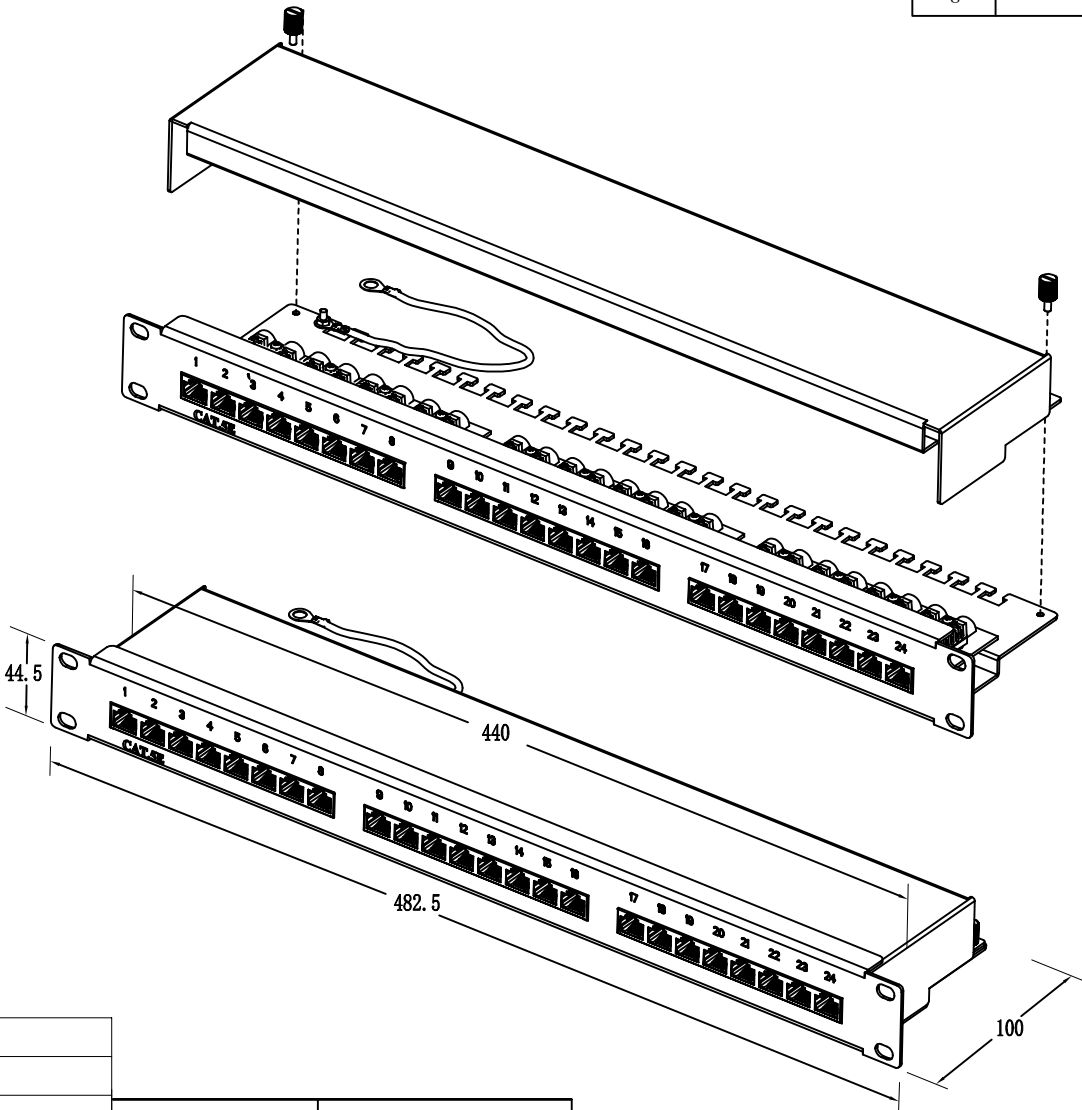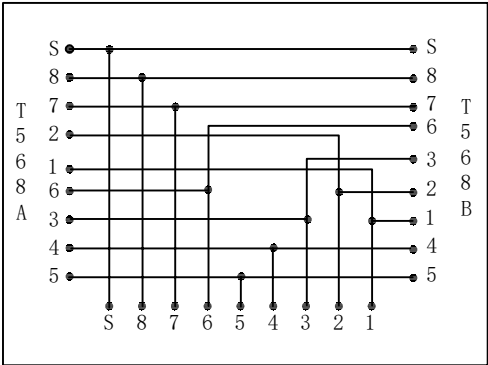

MATERIAL LIST:

⑦	Bottom Panel	1.5mm thickness Metallic Panel (SECC)/RAL9005	1	
⑥	Upper Panel Cover	1.0mm thickness Metallic Panel (SECC)/RAL9005	1	
⑤	RJ45 Jack	Housing-Fireproof PBT UL-94V0 Pin-8P8C 3u" gold plated	24	
④	PCB	FR-4/1.6mm UL-94V0	3	
③	IDC Body	Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/B	24	
②	IDC Pin	Bronze & Tinned	192	
①	IDC Terminal	For 22-26 AWG Cable		
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	Color
26. 99. 0328	Black RAL 9005
DESC.	VALUE Cat. 5e Patchpanel 24P, STP, black

SECOMP