




Datenblatt - Fiche technique - Data sheet

26.99.0366

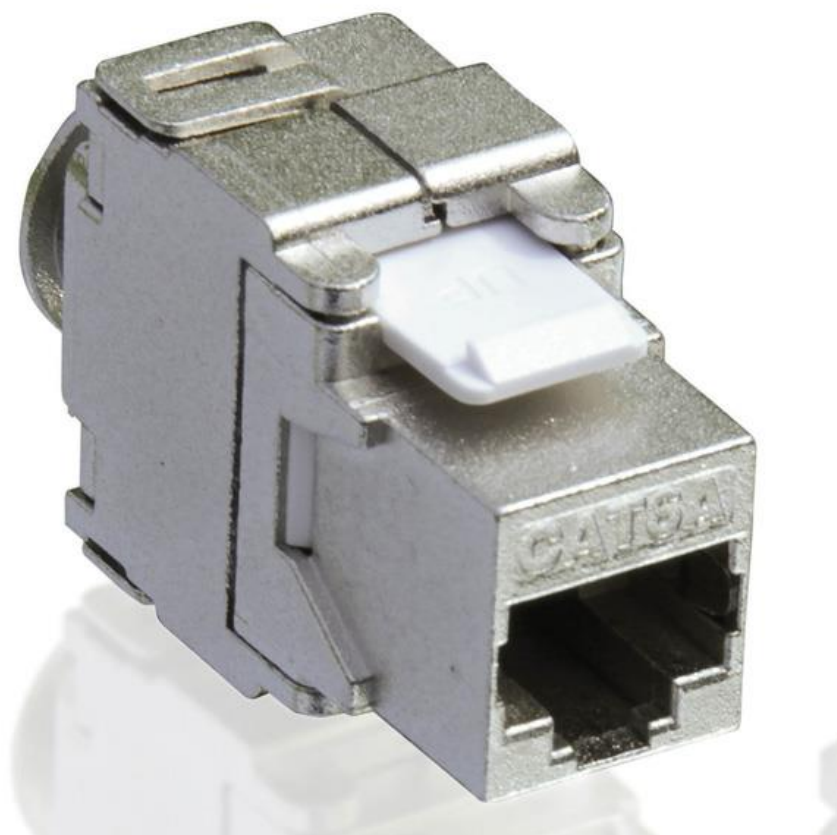


VALUE Kat.6a Keystone, RJ-45, geschirmt, werkzeuglos

VALUE Keystone Cat.6a, RJ-45, blindé, sans outil

VALUE Cat.6a Keystone, RJ-45, shielded, toolless, silver

Item no. 26.99.0366

VALUE Cat. 6a Keystone Jack, RJ-45, STP, silver

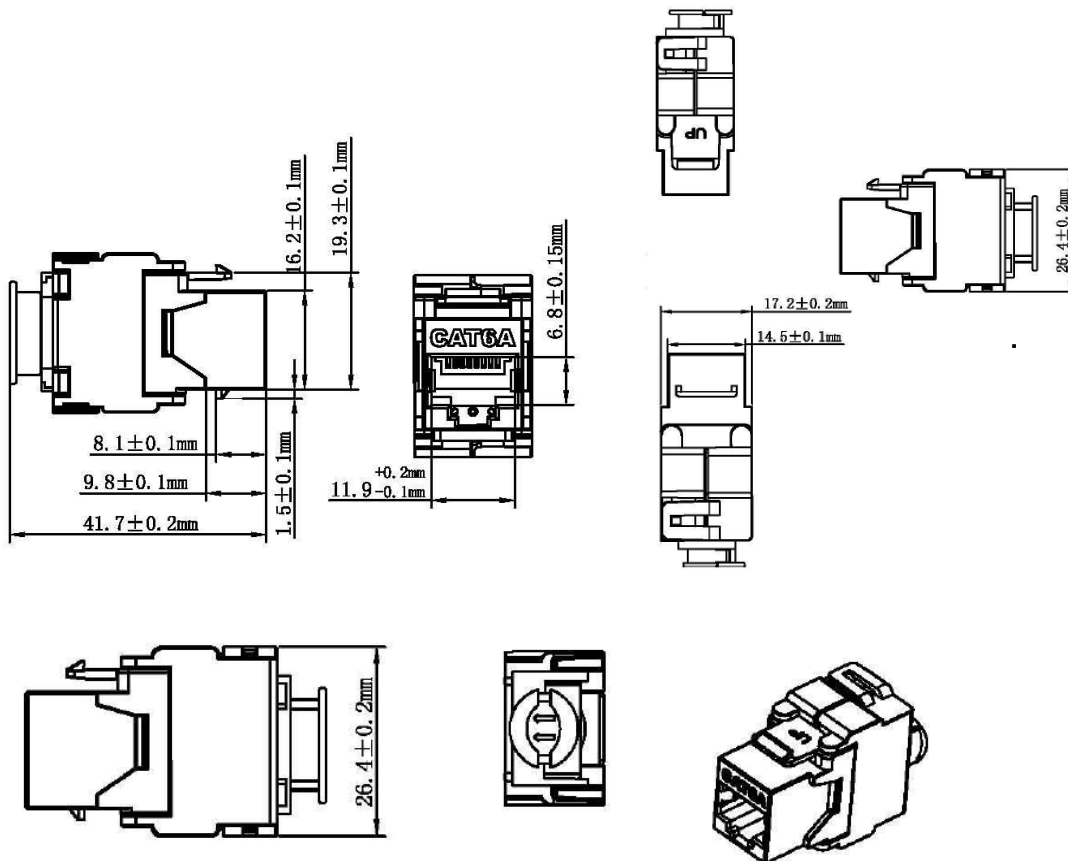

NOTES:

ELECTRICAL:

1. Contact Resistance : 20MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC1000V AC700V RMS 60Hz, 1MIN
4. CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

1. Storage : -40° TO+70°
2. Operation : -10° to+60°

MECHANICAL

1. SHIELD MATERIAL: ZINC ALLOY
2. IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
3. RJ45 Contact Life: 750 Times Min
4. IDC Life : 250 Times Min
5. RJ45 DIMENSION:11.9MM*9.8MM
6. WEIGHT: 34.7G

TYPE

1. SHIELDED CAT. 6A KEYSTONE JACK
2. COLOUR:SILVERY WHITE

PACKING: 1PCS/PE BAG +EAN

Material List:

⑦	MODULAR COVER	FIREPROOF PC UL94V0	1	
⑥	RJ 45 JACK INSERT	8P8C 3U" GOLD PLATED	8	
⑤	PCB	1.6mm UL 94V0	1	
④	IDC BODY	FIREPROOF/PC UL 94V0	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 22-26AWG CABLE	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK