



4-Port PS/2 Audio KVM Switch Kit TK-408K(v1.0R)

The 4-Port PS/2 KVM Switch with Audio lets you control multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. The KVM switch not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 4 PCs. With it's Hot-Plug, Auto-Scan, and Hot-Key operating features, the TK-408K is the perfect choice for managing 4 PCs. Separate KVM cables are included.

FEATURES


- Use one keyboard, monitor, and mouse to control four computer
- 4-Port PS/2 KVM switch with 1 set of Mic/Speaker port.
- 4 sets of PS/2, VGA and Audio & Microphone Cables
- Support Microsoft Intellimouse, Optical Mouse, Logitech Net Mouse and more
- Support very High Video Quality, up to 300MHz 2048 x 1536 VGA resolution
- Support Windows 98/98SE/ME/2000/XP/2003 Server, Linux, and Mac OS
- Multi-Platform support for PCs, Macintosh G3/G4, iMac and Mac Mini
- Hot-Plug feature, add PC or remove the connected PC for maintenance without powering down the KVM Switch or other PC's.
- No software required, easy PC selection via Push Button or Hot-Key Commands
- Auto-Scan Mode for monitoring PC's.
- Keyboard status restored when switching between PCs.
- LED display for easy status monitoring
- PS/2 Interface Power method
- 2-Year Warranty

4-Port PS/2 Audio KVM Switch Kit TK-408K (V1.0R)

SPECIFICATIONS

Hardware	
Computer Connections	• 4
KVM Cable	• 4 Sets of 1.8M (6ft) KVM & Audio Cables
Cable Interface (All Male)	
KVM cable	• To KVM: 1 x VGA/SVGA HDB 15-pin • To PC: 1 x PS/2 Keyboard 6-pin Mini Din (Male), 1 x PS/2 Mouse 6-pin Mini Din (Male), 1 X VGA/SVGA HDB 15-pin
Audio cable	• To KVM: 1 x 3.5mm audio in/out jack, 1 x 3.5mm microphone in/out jack • To PC: 1 x 3.5mm audio in/out jack, 1 x 3.5mm microphone in/out jack
Console Connectors (All Female)	• 1 x PS/2 Keyboard 6-pin Mini Din • 1 x PS/2 mouse 6-pin Mini Din • 1 x VGA/SVGA HDB 15-pin • 1 x 3.5mm audio in/out jack • 1 x 3.5mm microphone in/out jack
Port Selection	• Push Buttons and Hot-Key Commands
Auto-Scan Interval	• 5 seconds
Keyboard State	• Saved and Restored
Power Type	• PS/2 Interface Power
Dimensions	• 167 x 80 x 28 (6.6 x 3.2 x 1.1in.)
Weight	• 178g (6.3oz.)
Temperature	• Operating: 0°C ~ 40°C (32°F ~104°F) • Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	• 0%~90%, Non-Condensing
Certifications	• CE, FCC

NETWORKING SOLUTIONS

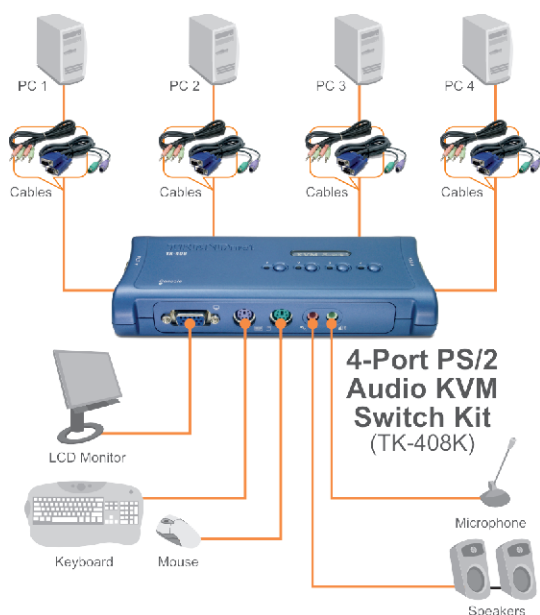

PACKAGE CONTENTS

- TK-408K
- Multi-Language User's Guide
- 4 sets of KVM & Audio Cables

RELATED PRODUCTS

TK-401R	4-Port Rack Mount KVM Switch
TK-207K	2-Port USB KVM Switch
TK-210K	2-Port USB Hub and PS/2 KVM Switch with Audio

ORDERING INFORMATION

TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA
Tel: 1-310-891-1100
Fax: 1-310-891-1111
Web: www.trendnet.com
Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

