

# NEW PRODUCTS 2025









### ROLINE S/FTP Patch Cord Cat.6A / Class EA, Stranded, TPE, LSOH, Tangle Free







Assembled double shielded (PiMF) twisted pair cable category 6A with shielded RJ-45 connectors on both sides. For connecting an IP camera.

Patch cord for networking connections between devices in combination with application (e.g. connection to surveillance cameras)

- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard



 Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

Tangle free





AWG 28

Bare Copper (Cu)

Flame retardant Low Smoke

	®
lin	

Designed for Professionals Available January 2026

Length [m]	grey	red	yellow	green	blue	black	white	– P.U.
0.3	21.15.4318	21.15.4308	21.15.4328	21.15.4338	21.15.4348	21.15.4358	21.15.4368	- 100
0.5	21.15.4310	21.15.4300	21.15.4320	21.15.4330	21.15.4340	21.15.4350	21.15.4360	- 100
1	21.15.4311	21.15.4301	21.15.4321	21.15.4331	21.15.4341	21.15.4351	21.15.4361	- 100
1.5	21.15.4314	21.15.4304	21.15.4324	21.15.4334	21.15.4344	21.15.4354	21.15.4364	- 100
2	21.15.4312	21.15.4302	21.15.4322	21.15.4332	21.15.4342	21.15.4352	21.15.4362	- 100
3	21.15.4313	21.15.4303	21.15.4323	21.15.4333	21.15.4343	21.15.4353	21.15.4363	<b>-</b> 50
5	21.15.4315	21.15.4305	21.15.4325	21.15.4335	21.15.4345	21.15.4355	21.15.4365	<b>-</b> 50
7	21.15.4316	21.15.4306	21.15.4326	21.15.4336	21.15.4346	21.15.4356	21.15.4366	- 40
10	21.15.4317	21.15.4307	21.15.4327	21.15.4337	21.15.4347	21.15.4357	21.15.4367	- 40

## ROLINE U/UTP PatchCord Cat.6A, Component Level, LSOH, Slim

100% Component Level Tested





- Patch cable for networking connections between devices.
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Slim, flexible cable, suitable for narrow bending.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded copper wire.





Available January 2026





Length [m]	grey	red	yellow	green	blue	black	white	– P.U.
0.15	21.15.4600	21.15.4610	21.15.4620	21.15.4630	21.15.4640	21.15.4650	21.15.4660	- 100
0.3	21.15.4601	21.15.4611	21.15.4621	21.15.4631	21.15.4641	21.15.4651	21.15.4661	- 100
0.5	21.15.4602	21.15.4612	21.15.4622	21.15.4632	21.15.4642	21.15.4652	21.15.4662	- 100
1	21.15.4603	21.15.4613	21.15.4623	21.15.4633	21.15.4643	21.15.4653	21.15.4663	- 100
1.5	21.15.4604	21.15.4614	21.15.4624	21.15.4634	21.15.4644	21.15.4654	21.15.4664	- 100
2	21.15.4605	21.15.4615	21.15.4625	21.15.4635	21.15.4645	21.15.4655	21.15.4665	- 100
3	21.15.4606	21.15.4616	21.15.4626	21.15.4636	21.15.4646	21.15.4656	21.15.4666	<b>-</b> 50
5	21.15.4607	21.15.4617	21.15.4627	21.15.4637	21.15.4647	21.15.4657	21.15.4667	- 50



ROLINE U/FTP PatchCord Cat.6A, Component Level, LSOH, Slim

100% Component Level Tested







Category 6A twisted-pair patch cable with RJ45 connectors on both sides. Particularly thin and flexible cable with individual pairs of wires in aluminium laminated foil for use in confined spaces, such as in data centres.

- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil







Flame retardant Low Smoke



rol	ine
Designed for	Professionals

Available	January	202
-----------	---------	-----

Length [m]	grey	red	yellow	green	blue	black	white	– P.U.
0.15	21.15.4700	21.15.4710	21.15.4720	21.15.4730	21.15.4740	21.15.4750	21.15.4760	- 100
0.3	21.15.4701	21.15.4711	21.15.4721	21.15.4731	21.15.4741	21.15.4751	21.15.4761	- 100
0.5	21.15.4702	21.15.4712	21.15.4722	21.15.4732	21.15.4742	21.15.4752	21.15.4762	- 100
1	21.15.4703	21.15.4713	21.15.4723	21.15.4733	21.15.4743	21.15.4753	21.15.4763	- 100
1.5	21.15.4704	21.15.4714	21.15.4724	21.15.4734	21.15.4744	21.15.4754	21.15.4764	- 100
2	21.15.4705	21.15.4715	21.15.4725	21.15.4735	21.15.4745	21.15.4755	21.15.4765	- 100
3	21.15.4706	21.15.4716	21.15.4726	21.15.4736	21.15.4747	21.15.4756	21.15.4766	- 50
5	21.15.4707	21.15.4717	21.15.4727	21.15.4737	21.15.4747	21.15.4757	21.15.4767	- 50

## ROLINE U/FTP PatchCord Cat.8 (Class I), Stranded, LSOH, Slim







- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil





Available January 2026



Bare Copper (Cu)

Halogenfree Flame retardan Low Smoke

Length [m]	grey	red	yellow	green	blue	black	white	– P.U.
0.15	21.15.3210	21.15.3220	21.15.3230	21.15.3240	21.15.3250	21.15.3260	21.15.3270	- 100
0.3	21.15.3211	21.15.3221	21.15.3231	21.15.3241	21.15.3251	21.15.3261	21.15.3271	- 100
0.5	21.15.3212	21.15.3222	21.15.3232	21.15.3242	21.15.3252	21.15.3262	21.15.3272	- 100
1	21.15.3213	21.15.3223	21.15.3233	21.15.3243	21.15.3253	21.15.3263	21.15.3273	- 100
1.5	21.15.3214	21.15.3224	21.15.3234	21.15.3244	21.15.3254	21.15.3264	21.15.3274	- 100
2	21.15.3215	21.15.3225	21.15.3235	21.15.3245	21.15.3255	21.15.3265	21.15.3275	- 100
3	21.15.3216	21.15.3226	21.15.3236	21.15.3246	21.15.3256	21.15.3266	21.15.3276	- 50



### VALUE S/FTP PatchCord Cat.8 (Class I), Stranded, LSOH







- Prepared double shielded Twisted Pair cable with screened RJ45 connector on both ends
- Suitable for PoE applications and multimedia applications were the extension is working over TP
- Suitable for 10 GBit to IEEE 802.3an and for Power over Ethernet
- Suitable for 25/40 GBit to IEEE 802.3bq applications (4-pair balanced twisted-pair cabling with 2 connectors over distances up to 30m)
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium clad polyester foil















Halogenfree Flame retardant Low Smoke

Length [m]	grey	red	yellow	green	blue	black	white	– P.U.
1	21.99.1801	21.99.1811	21.99.1821	21.99.1831	21.99.1851	21.99.1861	21.99.1871	- 100
2	21.99.1802	21.99.1812	21.99.1822	21.99.1832	21.99.1852	21.99.1862	21.99.1872	- 100
3	21.99.1803	21.99.1813	21.99.1823	21.99.1833	21.99.1853	21.99.1863	21.99.1873	- 50

## ROLINE S/FTP PatchCord Cat.8 (Class I), Stranded, LSOH, SLIM, PoE







- Prepared double shielded Twisted Pair cable with screened RJ45 connector on both ends
- Suitable for PoE applications and multimedia applications were the extension is working over TP
- Suitable for 10 GBit to IEEE 802.3an and for Power over Ethernet
- Suitable for 25/40 GBit to IEEE 802.3bq applications (4-pair balanced twisted-pair cabling with 2 connectors over distances up to 30m)
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium clad polyester foil





Available January 2026





Bare Copper (Cu)

Flame retardant
Low Smoke


Length [m]	grey	red	yellow	green	blue	black	white	– P.U.
0.3	21.15.3406	21.15.3416	21.15.3426	21.15.3436	21.15.3446	21.15.3456	21.15.3466	- 100
0.5	21.15.3400	21.15.3410	21.15.3420	21.15.3430	21.15.3440	21.15.3450	21.15.3460	- 100
1	21.15.3401	21.15.3411	21.15.3421	21.15.3431	21.15.3441	21.15.3451	21.15.3461	- 100
1.5	21.15.3404	21.15.3414	21.15.3424	21.15.3434	21.15.3444	21.15.3454	21.15.3464	- 100
2	21.15.3402	21.15.3412	21.15.3422	21.15.3432	21.15.3442	21.15.3452	21.15.3462	- 100
3	21.15.3403	21.15.3413	21.15.3423	21.15.3433	21.15.3443	21.15.3453	21.15.3463	- 100
5	21.15.3405	21.15.3415	21.15.3425	21.15.3435	21.15.3445	21.15.3455	21.15.3465	- 50




### ROLINE RJ-45 Modular Coupler, Cat.6 / Class E, Unshielded / Shielded, 25x / Carton

- Unshielded/Shielded housing
- The couplers are able to extend Cat.6 cables
- All couplers with eight contacts, 1:1 connected



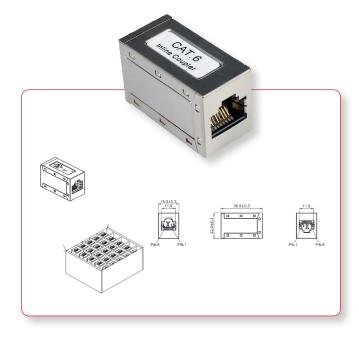







**Available December 2025** 

### ROLINE RJ-45 Mini Modular Coupler, Cat.6A / Class EA, Unshielded / Shielded

- Unshielded/Shielded housing
- The couplers are able to extend Cat.6A cables



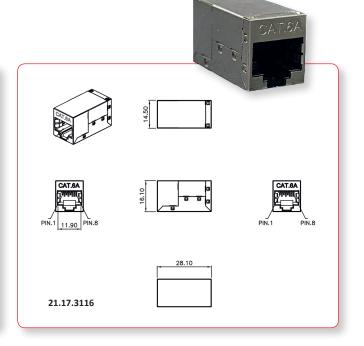


ROLINE RJ-45 Mini Modular Coupler, Cat.6A/Class EA, unshielded, white21.17.3115- 10ROLINE RJ-45 Mini Modular Coupler, Cat.6A/Class EA, shielded, silver21.17.3116- 10





#### VALUE Field Plug Cat.6A/Class EA, STP, Screwed Strain Relief


- Fast and easy tool-free installable shielded RJ45 connector
- Cat.6A / Class EA performance according to ISO/IEC11801 and IEC60603-7-51
- Compact cable manager for round Solid cable AWG 23-26(1/0.41-1/0.575mm) and stranded cable AWG 24-26(7/0.16-7/0.20mm)
- For cable with outer diameter OD: 6.0 8.5mm
- Pair management according to TIA 568B and TIA 568A colour codes
- Suitable for the PoE plus (IEEE 802.3at) applications
- Robust zinc die-cast housing
- Easy, quick and reliable installation, no special tool required
- The ring ensures 360° forwarding of the shielding of the cable to the shielding of the plug
- Color: silver







Available January 2026




VALUE Field Plug Cat.6A/Class EA, STP, screwed strain relief

### **ROLINE DIN Rail Keystone Holder**

#### DIN Adapter for Mounting of Keystones.

- Cable access variable 45° from the top or at the bottom, connection direction 45° downwards
- Construction width 1 unit
- With Shielded plate (grounding)
- Integrated dust cover
- Snap mechanism
- suitable modules: 26.11.0375 26.11.0376, 26.11.0377, 26.11.0378





Order-No. - P.U.

26.11.0379 - 10



**Available December 2025** 

ROLINE Keystone Holder, DIN-RAIL, 45°




### VALUE DIN Rail Adapter, empty, for 3x / 4x / 6x Keystones

#### DIN Rail Adapter, empty for 3x / 4x / 6x Keystones

- Stainless Steel DIN-Rail Adapter for Keystone, coupler
- For carrying Keystone modules
- For example, an 8-pole e.g. ROLINE Cat. 6A Keystone 26.11.0353/.0358...

REMARK: Delivery without Keystone Modules

• Contents: 1x Adapter



	Order-No.	– P.U.
VALUE DIN Rail Adapter, empty, for 3x Keystones	21.99.3010	- 10
VALUE DIN Rail Adapter, empty, for 4x Keystones	21.99.3011	- 10
VALUE DIN Rail Adapter, empty, for 6x Keystones	21.99.3012	- 10





Available January 2026


## ROLINE DIN Rail Adapter, empty, for 3x / 4x / 6x Keystones


#### DIN Rail Adapter, empty for 3x Keystones


- Stainless Steel DIN-Rail Adapter for Keystone, coupler
- For carrying Keystone modules
- For example, an 8-pole e.g. ROLINE Cat. 6A Keystone 26.11.0353/.0358...

REMARK: Delivery without Keystone Modules

• Contents:1x Adapter







	Order-No.	– P.U.
ROLINE DIN Rail Adapter, empty, for 3x Keystones	21.13.1315	- 10
ROLINE DIN Rail Adapter, empty, for 4x Keystones	21.13.1316	- 10
ROLINE DIN Rail Adapter, empty, for 6x Keystones	21.13.1317	- 10








#### VALUE 19" Cable Entry 1U with Brush Seal, with cable support plate



#### 19" cable guide with bristles, black metal, for horizontal or vertical cable routing

- Cable routing for server or data cabinet environments
- Suitable for mounting on all 19" data racks and server racks so cables can be neatly laid-important for greater reliability of connections throughout the cabinet
- Bristled cable routing provides perfect storage for your network cables and helps ensure a neat 19-Inch cabinet, vertically or horizontally
- Makes the installation cleaner and more professional
- Quality metal plate
- The opening of the panel has a brush strip, which prevents damage to patch/installation cables that are fed through
- A rear storage surface with cable fixing brackets enables optimum cable management in your 19" network or server enclosure
- Opening with brush strip (HxW: 30x400 mm)
- Shelf with cable fixing brackets (WxD: 480x100 mm)

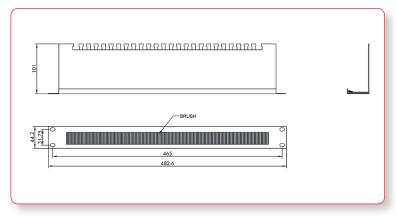



VALUE 19" Cable Entry 1U with Brush Seal, with cable support plate 26.99.0420







Available January 2026

### VALUE 19" 1U Rack Mountable Cable Management Bar (horizontal) with adjustable Depth



#### 19" cable guide 1UH, black, for horizontal cable routing


- Cable support guide for 19" server or data cabinet environments
   Suitable for mounting on all 19" data racks and server racks so cables can be neatly laid- important for greater reliability of connections throughout the cabinet
- Horizontal cable guide for patch panels /network switches / PDUs
- Reduces cable and connector strain, improving the airflow in racks and cabinets
- Prevents sharp cable bends at connector ends (patchcords) and alleviate port/ connector strain relief by securing the cables
- Dual Mode Installation allows inwards or outwards installation relative to the rack mounting posts bar allowing an optimal cable routing
- Adjusting Depth: 40-90mm
- Flexible cable Installation- features 25x lacing holes with a diameter of 9mm along the cable guide bar
- Hook and loop ties can be used to keep cables secured to the cable management bar
- 1U quality metal plate
- Contents: 19"-Cable Management Bar, 4x M6x16mm (mounting material)



Order-No. - P.U.

26.99.0435

VALUE 19" 1U Rack Mountable Cable Management Bar (horizontal) with adjustable Depth

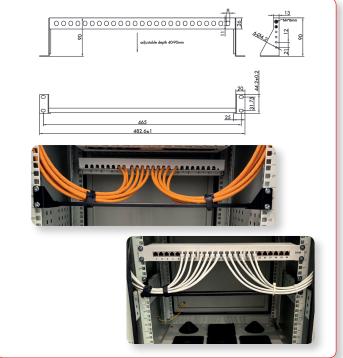



Available January 2026



26.99.0427


26.99.0429

VALUE 19"-Fixed Shelf, 485 x 150/250/350/400mm, max. 10 kg / 25 kg, 1UH, U-Shape

26.99.0428

#### Fixed shelf for installation in 19-Inch cabinets and wall-mounted enclosures

- 19" fixed shelf with maximum load capacity of 10 kg / 25 kg
- Contents: Mounting rack, mounting screws





26.99.0430

VALUE 19"-Fixed Shelf, 485 x 150/250/350/400 mm, max. 15 kg / 25 kg, 2UH, U-Shape




#### Fixed shelf for installation in 19-Inch cabinets and wall-mounted enclosures

• 19" fixed shelf with maximum load capacity of 15 kg / 25 kg

VALUE 19"-Fixed Shelf, 485 x 400mm, 1U, max. 25 kg, U-Shape, black

• Contents: Mounting rack, mounting screws



	Order-No.	– P.U.
VALUE 19"-Fixed Shelf, 485 x 150mm, 2U, max. 15 kg, U-Shape, black	26.99.0431	- 5
VALUE 19"-Fixed Shelf, 485 x 250mm, 2U, max. 15 kg, U-Shape, black	26.99.0432	- 5
VALUE 19"-Fixed Shelf, 485 x 350mm, 2U, max. 25 kg, U-Shape, black	26.99.0433	- 5
VALUE 19"-Fixed Shelf, 485 x 400mm, 2U, max. 25 kg, U-Shape, black	26.99.0434	- 5






### VALUE Server Rack Depth Extension 1U, Metal



- For mounting on 19" angle profiles
- Server rack mounting adapter kit
- Versatile, suitable for NVRs, switches, routers in data/audio/IT racks
- The depth adapter kit offers an efficient way to store and organize devices
- The server rack depth extension adapter kit reduces or extends the installation depth of your wall rack by 10 cm / 15 cm
- Can prevent cables from protruding from the network cabinet and minimize the effects of cable loads with high-density cabling
- Easy to install
- Robust, durable, compact
- Material: Steel
- Contents: 4x M6 cross screws, 4x M6 washers, 4x M6 cage nuts












Available January 2026

	Order-No.	– P.U.
VALUE Server rack depth extension 1U, metal, 101.5mm	26.99.0421	- 5
VALUE Server rack depth extension 1U, metal, 151,5mm	26.99.0422	- 5


### VALUE Server Rack Depth Extension 2U, Metal



- For mounting on 19" angle profiles
- Server rack mounting adapter kit
- Versatile, suitable for NVRs, switches, routers in data/audio/IT racks
- The depth adapter kit offers an efficient way to store and organize devices
- The server rack depth extension adapter kit reduces or extends the installation depth of your wall rack by 10 cm  $\,$  / 15 cm
- $\bullet$  Can prevent cables from protruding from the network cabinet and minimize the effects of cable loads with high-density cabling
- Easy to install
- Robust, durable, compact
- Material: Steel
- Contents: 4x M6 cross screws, 4x M6 washers, 4x M6 cage nuts













Available January 2026

	Order-No.	– P.U.
VALUE Server rack depth extension 2U, metal, 101.5mm	26.99.0423	- 5
VALUE Server rack depth extension 2U, metal, 151,5mm	26.99.0424	- 5



### VALUE USB 3.2 Gen 1 Hub, 4 Ports, Type A or C Connection Cable

With this hub up to four USB 3.0 / USB 3.2 Gen 1 peripheral devices can be connected to the USB Type A or C port of a PC.

- Fixed USB cable with type A or C connector for host connection
- Four USB Type A ports for connecting peripheral devices
- One USB C port for power supply (optional)
- Data transfer rates of up to 5 Gbps (USB 3.0 / USB 3.2 Gen 1)
- Automatic determination of the optimal transmission rate
- Aluminum housing

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

· Contents: Hub





	Order-No.	– P.U.
VALUE USB 3.2 Gen 1 Hub, 4 Ports, Type C Connection Cable	14.99.5035	- 10
VALUE USB 3.2 Gen 1 Hub. 4 Ports. Type A Connection Cable	14 99 5036	- 10



Available January 2026

### ROLINE KVM Switch, 4 PCs, HDMI 4K, USB

4-Port HDMI KVM Switch to control four computers with only one mouse, one keyboard and one screen - with a resolution of up to 3840x2160 @60Hz!

With this KVM switch four computers can be operated with a USB mouse, a USB keyboard and a monitor.

- Switching between the PCs is done via Hot Key on the keyboard or via Select Button on the KVM.
- LED display informs about the channel assignment
- Max. Resolution: 3840x2160 @60Hz
- Non-slip rubber feet and solid metal housing
- Supports Windows 7 / 8 / 10 / 11
- Contents: KVM Switch, power supply unit, operating instructions









### ROLINE Type C Multiport Docking Station, 4K HDMI, 2x USB 3.2 Gen 2, 1x C PD (Power Delivery), 1x GbE

The USB Type C Docking Station provides your MacBook, Ultrabook, Notebook or Laptop with a 4K capable HDMI port, 2x USB 3.1 / USB 3.2 Gen 2, 1x USB Type C PD (Power Delivery) and 1x Gigabit Ethernet!

- With One Key On /Off Screen Function for the HDMI port
- Plug & Play
- · Aluminium housing in space grey
- Multiport Docking Station with HDMI connection, allows the expansion of a display or mirroring to another monitor, television or beamer.
- Max. Resolution: 3840x2160 at 60Hz (4:4:4)
- Compact and flat design.

#### Connection to the mobile device:

• 1x USB Type C connector

#### Connections for peripheral devices:

- 1x HDMI 4K video output: Mirror or expand your screen to a TV, monitor or projector.
- 2x USB 3.1 / USB 3.2 Gen 2 Type A ports (data transfer rate up to 10Gbit/s), for connecting e.g. keyboard/mouse, USB HDD/SSD, etc.
- 1x USB Type C PD (Power Delivery, max. 100W)
- 1x RJ45 for Gigabit Ethernet
- 1x SD/TF port (Support SD and TF card data transfer rates up to 104MB/s)



Order-No. – P.U.

J. POIINE
Designed for Professionals

ROLINE Type C Multiport Docking Station, 4K HDMI, 2x USB 3.2 Gen 2, 1x C PD (Power Delivery), 1x GbE 12.02.1126 -

## VALUE Type C Video Cable, USB-C (DP Alt Mode) Extension Cable C-C, M/F




Ports and Interfaces

## For screen transmissions in excellent quality with resolutions of up to 3840x2160 / 4096x2560 @60Hz!

What is a USB-C DisplayPort (DP Alt Mode) Cable?

- Cables with Type-C connector can offer DisplayPort technology via an alternative mode (Alt mode).
- Alt Mode allows USB-C ports to transfer data/video via multiple interfaces, including DisplayPort video interface
- The USB-C ports capable of transferring DisplayPort signals are called USB-C Display-Port or DP Alt Mode
- Allow to connect video sources (e.g. PCs, Blu-Ray players, etc.) and display devices (e.g. TVs, projectors, etc.) that support DisplayPort to each other via their USB-C ports
- The main confusion over USB-C DisplayPort cables emerges because not all USB-C ports, available on the hardware (e.g. notebooks...) features the DisplayPort Alt Mode functionality
- For screen transmissions in excellent quality with resolutions of up to 3840x2160 / 4096x2560 @60Hz!

Remark: Support of "Alternate Mode (DP Alt Mode)" required

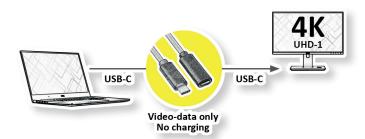

Order-No. – P.U.

VALUE Type C Video Cable, USB-C (DP Alt Mode) Extension Cable C-C, M/F, black, 1.5 m

11.99.5496 - 10





Available January 2026




#### VALUE Type C - DisplayPort Adapter, Bi-directional



- Reversible adapter which enables the connection between devices with USB Type-C and DisplayPort connectors
- Bidirectional cableadapter- works in BOTH signal directions with USB Type-C and DisplayPort connectors
- Requires the support of DisplayPort Alternate Mode on the USB Type C connection (laptop / PC / monitor)
- Offers a variety of possible applications
- monitor or TV connection with DisplayPort socket to a laptop/smartphone with USB Type-C port.
- connection of an USB Type-C monitor to a device with DisplayPort output (notebook/  $\mbox{\rm PC}...)$
- Plug & Play
- Converter is bus powered, this makes the integration within installations easy, with no additional need for external power supplies or outlets
- Max. resolution: 3840 x2160 @144Hz
- Connectors: DisplayPort female and Type C Male

Remark: Support of "Alternate Mode (DP Alt Mode)" required









Order-No. – P.U.

VALUE Type C - DisplayPort Adapter, Bi-directional, 4K144Hz 11.99.5957



## ROLINE Cable USB4 Gen3x2 with Emark, 80Gbit/s, 240W, C - C, M/M





High quality USB 4 Gen 3x2 cable with the reversible USB-C connector on both ends for data transfer rates of up to 80 Gbit/s and USB Power Delivery up to 48V / 5A (240 W).

- High quality USB4 Gen 3x2 cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 80 Gbit/s
- Supports USB Power Delivery to 48V / 5A

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called "protocol tunneling" that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.





	Order-No.	– P.U.
ROLINE Cable USB4 Gen3x2, with Emark, C–C, M/M, 80Gbit/s, 240W, black, 0.5 m	11.02.9095	- 10
ROLINE Cable USB4 Gen3x2, with Emark, C–C, M/M, 80Gbit/s,	11.02.9096	- 10







ROLINE USB 3.2 Gen 2 Cable, AOC, PD, with Emark, C-C, M/M

USB 3.1 / USB 3.2 Gen 2 cable with a data transmission rate of up to 10 Gbit/s and full Power Delivery support of up to 20V 3A!

- High quality USB 3.1 / USB 3.2 Gen 2 cable with improved shielding
- With the new reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 10 Gbit/s
- Supports USB Power Delivery to 20V / 3A
- Supports video transfer

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).



USB-C



	Order-No.	– P.U.
ROLINE USB 3.2 Gen 2 Cable, AOC, PD, with Emark, C-C, M/M, 10Gbit/s, 60W, 10m	11.02.9131	- 1
ROLINE USB 3.2 Gen 2 Cable AOC PD with Emark C-C M/M 10Gbit/s 60W 15m	11 02 9132	_ 1

USB-C



**Available December 2025** 

### ROLINE HDMI 8K (7680 x 4320) Ultra HD Cable + Ethernet, Slim, Flexible, M/M



High quality HDMI cable with HDMI connectors for optimal transmission of digital UHD signals at data rates up to 35.8 Gbit/s. For transfer of films in digital cinema quality with up to 8K at 60Hz.

- HDMI Ethernet Channel- Adds high-speed networking to an HDMI link, allowing users to take full advantage of their IP-enabled devices without a separate ethernet cable
- Audio Return Channel- Allows a HDMI-connected TV with a built-in tuner to send audio data "upstream" to a surround audio system, eliminating the need for a separate audio cable
- 3D- Defines input/output protocols for major 3D video formats
- 8K support- Enables video resolutions up to 4320p @60Hz far beyond 1080p, supporting next-generation displays
- Cable with HDMI male connector on both sides
- High quality cable with golden metal connector housing and shell for better shielding
- Gold plated contacts for higher durability



	Order-No.	– P.U.
ROLINE HDMI 8K (7680 x 4320) Ultra HD Cable + Ethernet, Slim, Flexible, M/M, 1 m	11.04.5923	- 10
ROLINE HDMI 8K (7680 x 4320) Ultra HD Cable + Ethernet, Slim, Flexible, M/M, 1.5 m	11.04.5924	- 10
ROLINE HDMI 8K (7680 x 4320) Ultra HD Cable + Ethernet, Slim, Flexible, M/M, 2 m	11.04.5925	- 10





## ROLINE USB2.0 Y - Splitter Charging Cable, Type C Connectors, C-C, M/M, max. 60W

- Y- USB splitter allows simultanous charging of two different devices, such as a smartphone/tablet... and smart watch
- Fully shielded cable with durable, braided flexible jacket
- We recommend the use with a USB wall charger
- Magnetic wireless charging capability
- Strong magnetic hold allows you a hassle free charging for compatible devices
- Convenient and tangle-free
- Connectors: 1x USB type C, 1x USB type C, 1x magnetic charging pad
- Length: 1.2m (0.9 m + 0.3 m)

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).





		4	3	\
	3			
/				



**Available December 2025** 


Order-No. ROLINE USB2.0 Y - Splitter Charging Cable, Type C Connectors, C-C, 11.02.8342 M/M, max. 60W, Charging Pad for Apple devices, black, 1.2 m ROLINE USB2.0 Y - Splitter Charging Cable, Type C Connectors, C-C, 11.02.8343 M/M, max. 100W, black, 1.2 m

### VALUE / ROLINE Cable UHD HDMI Active Optical (AOC), 10m



With our UHD (7680x4320 @60Hz) capable HDMI fiber cable you have the possibility to establish a connection of up to 10m between your devices. The active cable (AOC) does not require a separate power supply and is particularly well suited for routing in a cable duct.

- $\bullet$  Total length of the terminal distance (e.g., from notebook / laptop to beamer or PC to monitor): 10 meters
- Hardware solution, no software required
- No external power supply required
- · Low plug dimensions
- Maximum resolution of up to 7680x4320 @60Hz

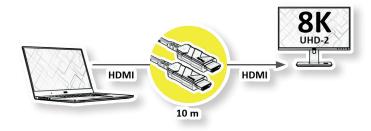



	Order-No.	– P.U.
VALUE Cable UHD HDMI Active Optical (AOC), M/M, 10 m	14.99.3488	- 1
	Order-No.	– P.U.
ROLINE Cable UHD HDMI Active Optical (AOC), M/M, 10 m	14.01.3488	- 1





### ROLINE 4K HDMI Switch, 3/4/5-way








#### Displays the video output of up to 3/4/5 HDMI sources on a monitor or projector.

- Shows the Video output of 3/4/5 HDMI devices like e.g. DVD player, video camera or game console on one monitor
- Supports HDMI High Speed
- Video input can be switched by button on the switch or remote control
- Supports nominal resolution of up to 3840 x 2160 @60Hz
- Supports high-resolution display of up to 480p, 576p, 720p, 1080i, 1080p, 2160p
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and
- USB Power supply cable needed
- Colour: Black
- Contents: HDMI switch, power adapter, remote control





	Order-No.	– P.U.
ROLINE 4K HDMI Switch, 3-way	14.01.3616	- 10
ROLINE 4K HDMI Switch, 4-way	14.01.3617	- 10
ROLINE 4K HDMI Switch, 5-way	14.01.3618	- 10



## VALUE / ROLINE Power Cable, Straight IEC Conncector

## Power cable with safety plug (German type) & C13 cold appliance socket

Cable with safety plug (German type)  $90^{\circ}$  angled and IEC 320-C13

- Plugs: Safety plug to C13 plug
- Nominal data: 250V AC/10A
- Colour: black

	Order-No.	– P.U.
VALUE Power Cable, straight IEC Conncector, black, 3m	19.99.1025	- 20
VALUE Power Cable, straight IEC Conncector, black, 5m	19.99.1026	- 20
	Order-No.	– P.U.
ROLINE Power Cable, straight IEC Connector, black, 0.6m	Order-No. 19.08.1016	- <b>P.U.</b>





Available January 2026



Available January 2026



#### VALUE / ROLINE Power Cord 3P German Type, IEC320 - C19 16A

Cable often used for UPS from 3000 VA and for connecting Blade servers.

- Connection cable 16 A with IEC320 C19 Female and German Type Plug, angled
- Cable: H05VV-F 3G1.5 3x 1.5mm²
- Nominal data: 250 VAC/16 A
- Colour: black





**Available December 2025** 

	Order-No.	– P.U.
VALUE Power Cord 3P German Type, IEC320 - C19 16A, black, 0.8m	19.99.1551	- 20

ROLINE Power Cord 3P German Type, IEC320 - C19 16A, black, 0.8m 19.08.1551 - 30



Available January 2026

## VALUE Power Strip, 3-way, 3x USB (1x C + 2x A) max. 30W


Power Strip with 3 German Type Sockets, and 3x USB charging connections (1x USB-C and 2x USB-A) and with desktop clamp fixing.

- 3-way power strip with plastic housing, Equipped with three AC sockets (CEE 7/3), 3x USB charging connections (1x USB-C and 2x USB-A)
- Sockets are 45° rotated
- Input voltage: AC 250V 60Hz
- Three AC socket output: AC 250V/16A max. 3680W
- USB-C PD3.0
- Single port output: max. 30W (5V/3A, 9V/3A, 15V/2A) Multiple ports output: max. 20W (5V/3A, 9V/2.22A)
- USB-A1,USB-A2 Output total 12W(Smart)
- Over current / Overload protection with Auto-recovery
- Short circuit / Over temperature protection with Auto-recovery
- $\bullet$  1.5m supply cable with low-profile angled safety plug and latch for easy unplugging
- Colour: white











Available January 2026



VALUE Power Strip, 3-way, 3x USB (1x C + 2x A) max. 30W, 1.5 m

19.99.1034 - 5



### VALUE Power Strip, 3 / 6-way UTE

- 3-way power strip with plastic housing
- Sockets are 35° rotated
- Colour: white

UTE Version-Suitable for France, Czech Republic, Slovakia











Available January 2026

## VALUE Power Strip, 3 / 6-way UTE, with Switch

• 3-way power strip with plastic housing

VALUE Power Strip, 3-way UTE, white, 1.5m

VALUE Power Strip, 3-way UTE, white, 3 m

VALUE Power Strip, 6-way UTE, white, 3 m

- Sockets are 45° rotated
- With illuminated 2-pole rocker switch
- Colour: white

UTE Version-Suitable for France, Czech Republic, Slovakia





	Order-No.	- P.U.
VALUE Power Strip, 3-way UTE, with Switch, white, 1.5 m	19.99.0969	- 10
VALUE Power Strip, 3-way UTE, with Switch, white, 3 m	19.99.0970	- 10
VALUE Power Strip, 6-way UTE, with Switch, white, 3 m	19.99.1032	- 10





Available January 2026

## ROLINE Power Strip, 6-way, with Switch, Aluminum Housing UTE version

## Power strip with safety shutter socket

- 6-way power strip with plastic housing
- Sockets are 45° rotated
- With illuminated 2-pole rocker switch
- Colour: black

UTE Version- Suitable for France, Czech Republic, Slovakia







Order-No. – P.U.



Available January 2026

ROLINE Power Strip, 6-way, with Switch, Aluminum Housing UTE version, silver, 3  $\,\mathrm{m}$ 

19.07.1613 - 10



### ROLINE Power Strip, 3x CEE 7/3 + 6x CEE 7/16 Euro socket

- 3x CEE 7/3 outlets, rotated 45° + 6x CEE 7/16 Euro socket outlets
- 1-pole rocker switch
- Max. load 10 A 230 V







	Order-No.	– P.U.
ROLINE Power Strip, 3x CEE 7/3 + 6x CEE 7/16 Euro socket, 1.5m	19.07.1502	- 10
ROLINE Power Strip, 3x CEE 7/3 + 6x CEE 7/16 Euro socket, 3m	19.07.1503	- 10



**Available January 2026** 

## ROLINE Power Strip, 6-way, with Switch, Aluminum Housing

#### Power strip with safety shutter sockets

- 6-way power strip with plastic housing
- Sockets are 45° rotated







	Order-No.	– P.U.
ROLINE Power Strip, 6-way, with Switch, Aluminum Housing, silver, 1.5 m	19.07.2612	- 10
ROLINE Power Strip, 6-way, with Switch, Aluminum Housing, silver, 3 m	19.07.2613	- 5






#### VALUE Monitor Arm, Desk Clamp, Pole Mount

LCD monitor arm, for easy and reliable adjustment of a monitor weighing up to 8kg and VESA 75 / 100! The Single LCD Arm makes your workstation more efficient and you gain more workspace.

- Designed for one monitor
- The arm is easy to adjust into any position
- The display can be tilted to any angle you need
- Spring assistant system easily adjusts the height of monitor
- Load capacity: up to 20 kg
- Meets VESA 75 (75 x 75 mm) or VESA 100 (100 x 100 mm)
- Fit Screen Size: < 124,46cm (49")
- Tilt Range: +50° ~ -20°
- Swivel Range: +90° ~ -90°
- Screen Rotation: +180° ~ -180°
- Quick Release VESA Plate: Yes
- Arm length: up to 515 mm
- With a C-clamp for desk mount

Tilt range: +50° ~ -20° Swivel range:  $+90^{\circ} \sim -90^{\circ}$ Screen rotation:  $+180^{\circ} \sim -180^{\circ}$ Arm full extension: 515mm Bar height: 409mm



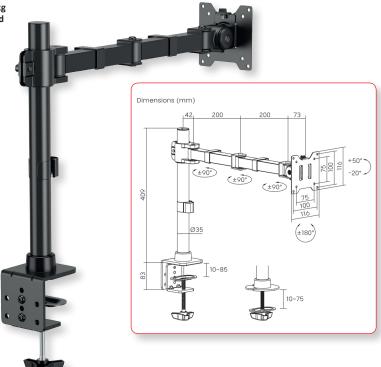

Order-No.

Available January 2026

VALUE Monitor Arm, Desk Clamp, Pole Mount, black, 515 mm 17.99.1171

### ROLINE Monitor Arm, Desk Clamp, Pole Mount, Heavy Duty, < 27kg

#### LCD monitor arm, for easy and reliable adjustment of a monitor weighing up to 27kg and VESA 200x200!

- · Designed for one monitor
- The arm is easy to adjust into any position
- The display can be tilted to any angle you need
- Spring assistant system easily adjusts the height of monitor
- Load capacity: up to 27 kg
- Meets VESA 75 (75x75mm)/VESA 100 (100x100mm) / VESA 200x100 / VESA 200x200
- Fit Screen Size: < 124,46cm (49")</li>
  Tilt Range: +60°~-20°
- Swivel Range: +90°~-90°
- Screen Rotation: +90°~-90° • Quick Release VESA Plate: Yes
- Arm length: up to 550 mm







Dimensions (mm)

Order-No. - P.U.

ROLINE Monitor Arm, Desk Clamp, Pole Mount, black, 550 mm

17.03.1218

**Designed for Professionals** 



#### **VALUE 19-Inch Wall Mount Cabinets**

The VALUE wall-mounted enclosures have been specially developed for flexible network cabling. Both the base plate and the roof are equipped with punched-out cable inlets. There is also a punched-out area in the roof to accommodate a fan module.

Inside, a pair of galvanized profile rails with 483 mm (19") height units is installed, which are also adjustable in depth. A further pair of profile rails can be retrofitted. The robust steel construction is made of high-quality sheet steel and is available powder-coated in black (RAL 9005).

The side panels are fitted with a quick-release fastener and are removable, which makes them much easier to access during operation. Locks can be integrated into the side panels as an option. Wall mounting is carried out in two simple steps: First the rear panel is attached to the wall, then the housing is mounted.

Optionally, leveling feet or castors can be attached so that the housing can also be used free-standing.

- Load capacity: 80 kg
- Front door made of tempered glass, lockable
- Side panels are fitted with a quick-release fastener and can be removed
- Roof with cut-out for fan modules
- Cable feed possible on roof and base
- Ventilation slots for passive ventilation and air extraction
- Incl. fastening material
- Protection class: IP20
- Delivery: Kit







	Order-No.	– P.U.
VALUE 19" Wall Mount Rack 6UH, 600x450mm (WxD), black, Kit	26.99.0823	- 1
VALUE 19" Wall Mount Rack 9UH, 600x450mm (WxD), black, Kit	26.99.0824	- 1
VALUE 19" Wall Mount Rack 12UH, 600x450mm (WxD), black, Kit	26.99.0825	- 1
VALUE 19" Wall Mount Rack 15UH, 600x450mm (WxD), black, Kit	26.99.0826	- 1
VALUE 19" Wall Mount Rack 18UH, 600x450mm (WxD), black, Kit	26.99.0827	- 1
VALUE 19" Wall Mount Rack 6UH, 600x600mm (WxD), black, Kit	26.99.0828	- 1
VALUE 19" Wall Mount Rack 9UH, 600x600mm (WxD), black, Kit	26.99.0829	- 1
VALUE 19" Wall Mount Rack 12UH, 600x600mm (WxD), black, Kit	26.99.0830	- 1
VALUE 19" Wall Mount Rack 15UH, 600x600mm (WxD), black, Kit	26.99.0831	- 1
VALUE 19" Wall Mount Rack 18UH, 600x600mm (WxD), black, Kit	26.99.0832	- 1













#### **ROLINE 10-Inch Wall Housing Basic**

With the compact 10-inch solutions from the ROLINE Basic series, you can install your network where you need it. The wall-mounted enclosures are available in three different height units (6U, 9U, 12U). Each enclosure consists of a robust steel construction made of sheet steel up to 1.5 mm thick.

#### Characteristics:

- Load capacity: 30 kg
- Front door made of tempered glass, lockable
- 1-point locking system on the front door
- Side panels are lockable and removable
- Incl. earthing bolt on the base
- Roof and base with cable routing
- Ventilation slots for passive ventilation and extraction
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: Yes

The ROLINE Basic series offers a versatile selection of 10-inch wall-mounted enclosures in various height units from 6 U to 12 U and in the colours grey (RAL 7035) and black (RAL 9005).









Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0024	6 U	312	300	grey / RAL 7035
26.21.0193	6 U	312	300	black / RAL 9005
26.21.0025	9 U	312	300	grey / RAL 7035
26.21.0194	9 U	312	300	black / RAL 9005
26.21.0026	12 U	312	300	grey / RAL 7035
26.21.0195	12 U	312	300	black / RAL 9005



#### **ROLINE 19-Inch Wall Housing Pro Outdoor**

The outdoor network cabinets for wall mounting have been developed in accordance with protection class IP55 and are specially designed for use in harsh environments. These cabinets are ideal for outdoor areas that are exposed to environmental influences such as rain, hail and splash water. Each enclosure consists of a robust steel construction with a material thickness of up to 2.0 mm.


#### Characteristics:

- Load capacity: 100 kg
- Locking system Steel front door with swivel lever handle
- 3-point locking system on the front door
- Front door with earthing and two welded-on, reinforcing beams
- Cable entry in the floor
- Roof offers hot air extraction from the housing with fan modules to be installed Punch-out for fan modules
- Integrated ventilation filter housing
- Incl. 4x mounting brackets, screws and washers
- Colour: Light grey, RAL 7035
- IP protection class: IP55
- Mounted: Yes



The ROLINE Pro series offers a versatile selection of outdoor wall-mounted enclosures in various height units from 7 U to 22 U in the colour grey (RAL 7035).







Rear panel without cable entry



3-point locking system on the front door Base plate with cable feed Roof with cut-outs for ventilation

Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0082	7 U	600	450	grey / RAL 7035
26.21.0083	7 U	600	600	grey / RAL 7035
26.21.0084	9 U	600	450	grey / RAL 7035
26.21.0085	9 U	600	600	grey / RAL 7035
26.21.0086	12 U	600	450	grey / RAL 7035
26.21.0087	12 U	600	600	grey / RAL 7035
26.21.0088	16 U	600	450	grey / RAL 7035
26.21.0089	16 U	600	600	grey / RAL 7035
26.21.0090	20 U	600	450	grey / RAL 7035
26.21.0091	20 U	600	600	grey / RAL 7035
26.21.0092	22 U	600	600	grey / RAL 7035



## **ROLINE 19-Inch Wall-Mounted Housing Pro**







Tempered glass front door



Rear panel with cable feed



Removable side panels



Integrated locking cylinder



roline


**Designed for Professionals** 

#### **ROLINE 19-Inch Wall-Mounted Housing Pro**

The ROLINE Pro series wall-mounted enclosures have been specially designed for flexible network cabling. Each enclosure has a slide-on cable inlet in the roof with a foam rubber seal. The robust steel constructions of the enclosures are made of sheet steel up to 1.5 mm thick.

#### Characteristics:

- Load capacity: 100 kg
- Front door made of toughened glass, lockable
- 1-point locking system on the front door
- Side panels are lockable and removable
- Cable entry at the rear and base
- Roof with cut-out for fan modules
- Ventilation slots for passive ventilation and extraction
- Incl. mounting material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20





Base plate with cable feed



Roof with cut-outs for ventilation

Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0170	7 U	600	450	black / RAL 9005
26.21.0171	7 U	600	600	black / RAL 9005
26.21.0172	9 U	600	450	black / RAL 9005
26.21.0173	9 U	600	600	black / RAL 9005
26.21.0174	12 U	600	450	black / RAL 9005
26.21.0005	12 U	600	600	black / RAL 9005
26.21.0176	16 U	600	450	black / RAL 9005
26.21.0177	16 U	600	600	black / RAL 9005
26.21.0178	20 U	600	450	black / RAL 9005
26.21.0179	20 U	600	600	black / RAL 9005
26.21.0000	7 U	600	450	grey / RAL 7035
26.21.0001	7 U	600	600	grey / RAL 7035
26.21.0002	9 U	600	450	grey / RAL 7035
26.21.0003	9 U	600	600	grey / RAL 7035
26.21.0004	12 U	600	450	grey / RAL 7035
26.21.0175	12 U	600	600	grey / RAL 7035
26.21.0006	16 U	600	450	grey / RAL 7035
26.21.0007	16 U	600	600	grey / RAL 7035
26.21.0008	20 U	600	450	grey / RAL 7035
26.21.0009	20 U	600	600	grey / RAL 7035



ROLINE 19-Inch Wall Housing Pro "two-part swivelling"







Tempered glass front door



Rear panel with cable feed



Removable side panels



Integrated locking cylinder



#### ROLINE 19-Inch Wall Housing Pro "two-part swivelling"


The ROLINE Pro series wall-mounted enclosures have been specially designed for flexible network cabling. Thanks to the integrated hinge in the rear frame allows the enclosure to be folded to the side if required. Each enclosure has a sliding cable inlet with a foam rubber seal in the roof. Each enclosure consists of a robust steel construction made of up to 1.5 mm thick sheet steel and is electrostatically powder-coated in the standard colours grey (RAL 7035) and black (RAL 9005).

#### Characteristics:

- Load capacity: 80 kg
- Front door made of tempered glass, lockable
- 1-point locking system on the front door
- Housing is connected to the rear frame with a separate lock
- Cable feed at the rear and base
- Side panels are lockable and removable
- Roof with cut-out for fan modules
- Ventilation slots for passive ventilation and extraction
- incl. mounting material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: Yes



The ROLINE Pro series offers a versatile selection of two-part swivelling wall-mounted enclosures in various height units from 7 U to 20 U and in the colours grey (RAL 7035) and black (RAL 9005).



Base plate with cable feed



Roof with cut-outs for ventilation

Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0180	7 U	600	600	black / RAL 9005
26.21.0181	9 U	600	600	black / RAL 9005
26.21.0182	12 U	600	600	black / RAL 9005
26.21.0183	16 U	600	600	black / RAL 9005
26.21.0184	20 U	600	600	black / RAL 9005
26.21.0010	7 U	600	600	grey / RAL 7035
26.21.0011	9 U	600	600	grey / RAL 7035
26.21.0012	12 U	600	600	grey / RAL 7035
26.21.0013	16 U	600	600	grey / RAL 7035
26.21.0014	20 U	600	600	grey / RAL 7035



#### **ROLINE 19-Inch Wall-Mounted Enclosure Basic (5U)**

The wall-mounted enclosures in the ROLINE Basic series are perfect for housing active and passive components. They stand out from many other enclosures thanks to their simple and, above all, time-saving installation. Thanks to their modern design, they blend harmoniously into any office or home.

#### Characteristics:

- Load capacity: 30 kg
- Housing can be opened up to 80°
- 1-point locking
- Integrated door stopper mechanism
- 19 inch installation options:
- 3U vertical (rotatable), 2U horizontal (fixed)
- max. installation depth: 265mm
- Pre-punched cut-outs for cable routing
- Ventilation slots for passive ventilation and extraction
- Base plate with punched mounting holes
- IP protection class: IP20
- Mounted: Yes

The ROLINE Basic series offers a selection of wall-mounted enclosures in various height units and in the colours grey (RAL 7035) and black (RAL 9005).



Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0015	5 U	500	475	grey / RAL 7035
26.21.0185	5 U	500	475	black / RAL 9005



#### **ROLINE 19-Inch Wall-Mounted Enclosure Basic (Kit)**

The 19-Inch wall-mounted cabinets in the ROLINE Basic series are supplied unassembled as a flat pack (kit). Each cabinet consists of a robust steel construction made of sheet steel up to 1.5 mm thick. Assembly is quick and easy thanks to the enclosed assembly instructions.

#### Characteristics:

- Load capacity: 60 kg
- Front door made of tempered glass, lockable
- 1-point locking system on the front door
- Roof and base with cable routing
- Ventilation slots for passive ventilation and extraction
- Roof with cut-outs for fan modules
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: No

The ROLINE Basic series offers a versatile selection of wall-mounted enclosures (flat pack) in various height units from 7 U to 12 U and in the colours grey (RAL 7035) and black (RAL 9005).







Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0186	7 U	540	400	black / RAL 9005
26.21.0187	9 U	540	400	black / RAL 9005
26.21.0188	12 U	540	400	black / RAL 9005
26.21.0016	7 U	540	400	grey / RAL 7035
26.21.0017	9 U	540	400	grey / RAL 7035
26.21.0018	12 U	540	400	grey / RAL 7035



ROLINE 19-Inch Network Cabinet Basic "Glass Door"







Tempered glass front door




Rear panel without cable entry



Removable side panels



Locking system with swivel lever handle



Base plate with cable feed



Roof with cut-outs for ventilation



#### ROLINE 19-Inch Network Cabinet Basic "Glass Door"

The network cabinets in the ROLINE Basic series have been developed to enable simple and particularly cost-efficient network expansion. Strategically placed cable inlets ensure effortless installation depending on the application. Each cabinet consists of a robust steel construction with a material thickness of up to 1.5 mm sheet steel.

#### Characteristics:

- Load capacity: 600 kg
- Tempered glass front door
- Locking system with swivel lever handle on front door
- 1-point locking system on the front door
- Rear and side panels are lockable and removable
- Pre-assembled 4 levelling feet
- Base with punched cable inlet
- Roof with cut-out for fan modules
- Incl. mounting material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: Yes

The ROLINE Basic series offers a versatile selection of network enclosures n various height units from 22 U to 42 U and in the colours grey (RAL 7035) and black (RAL 9005).





Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0200	22 U	600	600	black / RAL 9005
26.21.0204	26 U	600	600	black / RAL 9005
26.21.0206	32 U	600	600	black / RAL 9005
26.21.0211	42 U	600	600	black / RAL 9005
26.21.0201	22 U	600	800	black / RAL 9005
26.21.0202	22 U	800	800	black / RAL 9005
26.21.0205	26 U	600	800	black / RAL 9005
26.21.0207	32 U	600	800	black / RAL 9005
26.21.0208	32 U	800	800	black / RAL 9005
26.21.0212	42 U	600	800	black / RAL 9005
26.21.0216	42 U	800	800	black / RAL 9005
26.21.0209	42 U	600	1000	black / RAL 9005
26.21.0213	42 U	800	1000	black / RAL 9005
26.21.0031	22 U	600	600	grey / RAL 7035
26.21.0035	26 U	600	600	grey / RAL 7035
26.21.0037	32 U	600	600	grey / RAL 7035
26.21.0042	42 U	600	600	grey / RAL 7035
26.21.0032	22 U	600	800	grey / RAL 7035
26.21.0033	22 U	800	800	grey / RAL 7035
26.21.0036	26 U	600	800	grey / RAL 7035
26.21.0038	32 U	600	800	grey / RAL 7035
26.21.0039	32 U	800	800	grey / RAL 7035
26.21.0043	42 U	600	800	grey / RAL 7035
26.21.0047	42 U	800	800	grey / RAL 7035
26.21.0040	42 U	600	1000	grey / RAL 7035
26.21.0044	42 U	800	1000	grey / RAL 7035



ROLINE 19-Inch Server Cabinet Basic "Perforated Door"







Front door made of 70% perforated steel



1-point locking on all doors



Removable side panels



Locking system with swivel lever handle



#### ROLINE 19-Inch Server Cabinet Basic "Perforated Door"

The server cabinets in the ROLINE Basic series have been developed to enable simple and particularly cost-efficient network expansion. Strategically placed cable inlets ensure effortless installation depending on the application. Each cabinet consists of a robust steel construction with a material thickness of up to 1.5 mm sheet steel.

#### Characteristics:

- Load capacity: 600 or 1000 kg
- Front & rear doors made of 70% perforated steel
- Locking system with swivel lever handle on front and rear doors
- 1-point locking system on all doors
- Side panels are lockable and removable
- Double-leaf rear door
- Floor with punched cable inlet
- Roof with cut-out for fan modules
- Pre-assembled 4 levelling feet
- Incl. fixing material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: Yes

(RAL 9005).





Base plate with cable feed



roline

**Designed for Professionals** 

Roof with cut-outs for ventilation


Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0203	26 U	600	1000	black / RAL 9005
26.21.0210	42 U	600	1000	black / RAL 9005
26.21.0214	42 U	800	1000	black / RAL 9005
26.21.0215	42 U	800	1000	black / RAL 9005
26.21.0034	26 U	600	1000	grey / RAL 7035
26.21.0041	42 U	600	1000	grey / RAL 7035
26.21.0045	42 U	800	1000	grey / RAL 7035
26.21.0046	42 U	800	1000	grey / RAL 7035

Order-No.	Incl. cable routing channels	Maximum Weight Capacity (kg)
26.21.0203	No	600
26.21.0210	No	1000
26.21.0214	Yes	1000
26.21.0215	No	1000
26.21.0034	No	600
26.21.0041	No	1000
26.21.0045	Yes	1000
26.21.0046	No	1000



#### **ROLINE 19-Inch Network Cabinet Pro**





Rear panel with cable feed Removable side walls



Locking system with swivel lever handle

Base plate with cable feed



Roof with cut-outs for ventilation



#### **ROLINE 19-Inch Network Cabinet Pro**

The network cabinets in the ROLINE Pro series were developed to enable particularly convenient and flexible network cabling. Each cabinet consists of a robust steel construction with a material thickness of up to 1.5 mm sheet steel. It is possible to change the door hinge. The cabinets can also be completely dismantled if required.

#### Characteristics:

- Load capacity: 800 kg
- Front door made of lateral metal struts with safety glass
- Locking system with swivelling lever handle on front door; 1-point locking on all doors
- Side panels are lockable and removable
- Pre-assembled 4 levelling feet
- Base with slide-on cable inlet
- Roof with cut-out for fan modules and removable lid
- Incl. fastening material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: Yes



The ROLINE Pro series offers a versatile selection of network enclosures in various height units from 16 U to 47 U and in the colours grey (RAL 7035) and black (RAL 9005).

Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0218	22 U	600	600	black / RAL 9005
26.21.0221	26 U	600	600	black / RAL 9005
26.21.0225	32 U	600	600	black / RAL 9005
26.21.0228	36 U	800	600	black / RAL 9005
26.21.0231	42 U	600	600	black / RAL 9005
26.21.0237	47 U	600	600	black / RAL 9005
26.21.0217	16 U	600	800	black / RAL 9005
26.21.0219	22 U	600	800	black / RAL 9005
26.21.0220	22 U	800	800	black / RAL 9005
26.21.0222	26 U	600	800	black / RAL 9005
26.21.0224	26 U	800	800	black / RAL 9005
26.21.0226	32 U	600	800	black / RAL 9005
26.21.0227	32 U	800	800	black / RAL 9005
26.21.0229	36 U	600	800	black / RAL 9005
26.21.0232	42 U	600	800	black / RAL 9005
26.21.0235	42 U	800	800	black / RAL 9005
26.21.0238	47 U	600	800	black / RAL 9005
26.21.0239	47 U	800	800	black / RAL 9005
26.21.0223	26 U	800	1000	black / RAL 9005
26.21.0230	42 U	600	1000	black / RAL 9005
26.21.0233	42 U	800	1000	black / RAL 9005
26.21.0236	47 U	600	1000	black / RAL 9005
26.21.0234	42 U	800	1200	black / RAL 9005
26.21.0049	22 U	600	600	grey / RAL 7035
26.21.0052	26 U	600	600	grey / RAL 7035
26.21.0056	32 U	600	600	grey / RAL 7035
26.21.0059	36 U	800	600	grey / RAL 7035
26.21.0062	42 U	600	600	grey / RAL 7035
26.21.0068	47 U	600	600	grey / RAL 7035
26.21.0048	16 U	600	800	grey / RAL 7035
26.21.0050	22 U	600	800	grey / RAL 7035
26.21.0051	22 U	800	800	grey / RAL 7035
26.21.0053	26 U	600	800	grey / RAL 7035
26.21.0055	26 U	800	800	grey / RAL 7035
26.21.0057	32 U	600	800	grey / RAL 7035
26.21.0058	32 U	800	800	grey / RAL 7035
26.21.0060	36 U	600	800	grey / RAL 7035
26.21.0063	42 U	600	800	grey / RAL 7035
26.21.0066	42 U	800	800	grey / RAL 7035
26.21.0069	47 U	600	800	grey / RAL 7035
26.21.0070	47 U	800	800	grey / RAL 7035
26.21.0054	26 U	800	1000	grey / RAL 7035
26.21.0061	42 U	600	1000	grey / RAL 7035
26.21.0064	42 U	800	1000	grey / RAL 7035
26.21.0067	47 U	600	1000	grey / RAL 7035
26.21.0065	42 U	800	1200	grey / RAL 7035



**ROLINE 19-Inch Wall-Mounted Housing Basic Plus** 









Tempered glass front door

Rear panel with cut-outs

Removable side panels (quick-release mechanism)







Base plate with cut-out



Roof with cut-outs for ventilation



#### **ROLINE 19-Inch Wall-Mounted Housing Basic Plus**

The ROLINE Basic Plus series wall-mounted enclosures have been specially designed for flexible network cabling. This series represents an ideal balance between the ROLINE PRO and ROLINE Basic series.

#### Characteristics:

- Load capacity: 80 kg
- Front door made of tempered glass, lockable
- Side panels are fitted with a quick-release mechanism and are removable

- Roof with cut-out for fan modules
- Cable feed possible on roof and base
- Ventilation slots for passive ventilation and air extraction
- incl. mounting material
- Color: Light grey, RAL 7035 or Jet black, RAL 9005

- IP protection class: IP20
- Delivery: assembled



The ROLINE Basic Plus series offers a versatile selection of wall-mounted enclosures in various height units from 4 U to 18 U and in the colours grey (RAL 7035) and black

Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0282	4 U	600	450	black / RAL 9005
26.21.0288	4 U	600	600	black / RAL 9005
26.21.0283	6 U	600	450	black / RAL 9005
26.21.0289	6 U	600	600	black / RAL 9005
26.21.0284	9 U	600	450	black / RAL 9005
26.21.0290	9 U	600	600	black / RAL 9005
26.21.0285	12 U	600	450	black / RAL 9005
26.21.0291	12 U	600	600	black / RAL 9005
26.21.0286	15 U	600	450	black / RAL 9005
26.21.0292	15 U	600	600	black / RAL 9005
26.21.0287	18 U	600	450	black / RAL 9005
26.21.0293	18 U	600	600	black / RAL 9005
26.21.0122	4 U	600	450	grey / RAL 7035
26.21.0128	4 U	600	600	grey / RAL 7035
26.21.0123	6 U	600	450	grey / RAL 7035
26.21.0129	6 U	600	600	grey / RAL 7035
26.21.0124	9 U	600	450	grey / RAL 7035
26.21.0130	9 U	600	600	grey / RAL 7035
26.21.0125	12 U	600	450	grey / RAL 7035
26.21.0131	12 U	600	600	grey / RAL 7035
26.21.0126	15 U	600	450	grey / RAL 7035
26.21.0132	15 U	600	600	grey / RAL 7035
26.21.0127	18 U	600	450	grey / RAL 7035
26.21.0133	18 U	600	600	grey / RAL 7035



**ROLINE 19-Inch Server Cabinets Pro** 





Front door made of 70% perforated steel



Double-leaf rear door



Removable side panels



Front door with swivel lever handle



Base plate with slide-on cable inlet



Roof with cut-outs for ventilation



#### **ROLINE 19-Inch Server Cabinets Pro**

The server cabinets in the ROLINE Pro series have been specially developed for convenient and flexible network cabling. Each cabinet consists of a robust steel construction with a material thickness of up to 2.0 mm. The door hinge can also be changed. The entire construction can be dismantled, meaning that the cabinets can be completely removed if required.

#### Characteristics:

- Load capacity: 1000 kg
- Front & rear doors made of 70% perforated steel
- Front door in perforated or glass area with outward curvature
- Front door with 4-point locking and rear door (double-leaf) with 3-point locking
- Side panels are lockable and removable
- 4 levelling feet, lockable castors
- Base with slide-on cable inlet
- Roof with cut-out for fan modules, incl. perforated cover
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20

• Mounted: Yes



The ROLINE Pro series offers a versatile selection of server enclosures in various height units from 26 U to 47 U and in the colours grey (RAL 7035) and black (RAL 9005).

Order-No.	Height	Width (mm)	Depth (mm)	Colour / RAL	Front door
26.21.0148	26 U	600	1000	black / RAL 9005	Glass door
26.21.0152	36 U	600	1000	black / RAL 9005	Glass door
26.21.0162	42 U	600	1000	black / RAL 9005	Glass door
26.21.0149	26 U	600	1000	grey / RAL 7035	Glass door
26.21.0153	36 U	600	1000	grey / RAL 7035	Glass door
26.21.0163	42 U	600	1000	grey / RAL 7035	Glass door
26.21.0146	26 U	600	1000	black / RAL 9005	perforated
26.21.0150	36 U	600	1000	black / RAL 9005	perforated
26.21.0160	42 U	600	1000	black / RAL 9005	perforated
26.21.0154	42 U	600	1200	black / RAL 9005	perforated
26.21.0166	47 U	600	1000	black / RAL 9005	perforated
26.21.0168	36 U	800	1000	black / RAL 9005	perforated
26.21.0158	42 U	800	1000	black / RAL 9005	perforated
26.21.0156	42 U	800	1200	black / RAL 9005	perforated
26.21.0164	47 U	800	1000	black / RAL 9005	perforated
26.21.0147	26 U	600	1000	grey / RAL 7035	perforated
26.21.0151	36 U	600	1000	grey / RAL 7035	perforated
26.21.0161	42 U	600	1000	grey / RAL 7035	perforated
26.21.0155	42 U	600	1200	grey / RAL 7035	perforated
26.21.0167	47 U	600	1000	grey / RAL 7035	perforated
26.21.0169	36 U	800	1000	grey / RAL 7035	perforated
26.21.0159	42 U	800	1000	grey / RAL 7035	perforated
26.21.0157	42 U	800	1200	grey / RAL 7035	perforated
26.21.0165	47 U	800	1000	grey / RAL 7035	perforated



#### **ROLINE Castors** for 19-Inch Server and Network Cabinets

The ROLINE lockable castors are supplied in a set of 4 including mounting material and are ready for immediate use. With a load capacity of 250 kg per castor, they guarantee high stability for your 19" cabinets/wall-mounted enclosures.







		Order-No.
ROLINE Castors for Server/Network Cabinets, 250 kg	Α	26.21.0079
ROLINE Castors for Wall Mount Cabinets, 250 kg	В	26.21.0023

### **ROLINE Base for Network Cabinets**

The plinths are available for all 19" cabinets in the ROLINE Pro series and the ROLINE Basic series. They increase the ground clearance by 100 mm and can be stacked on top of each other to achieve a height of up to 200 mm. The interior can be used for storing excess cable lengths and for cable management. The delivery includes a kit.







More versions available!	Order-No.
ROLINE Base for Network Cabinets, 800x1000 WxD, grey	26.21.0073
ROLINE Base for Network Cabinets, 800x1000 WxD, black	26.21.0242

## ROLINE Fan Unit for 19-Inch Wall Mount Cabinets, with Thermostat

The fan units are compatible with all mounted wall-mounted enclosures in the ROLINE Pro series, as well as with all unmounted network and server enclosures (-EC). They are quick and easy to install in the roof module. A switch and an adjustable thermostat offer optimum customisation options. The model is available in the standard colours grey (RAL 7035) and black (RAL 9005).







	Order-No.
ROLINE Fan Unit, 2 Fans, for 19-Inch Wall Mount Cabinets, grey	26.21.0019
ROLINE Fan Unit, 2 Fans, for 19-Inch Wall Mount Cabinets, black	26.21.0189



### ROLINE Roof Fan Unit for 19-Inch Wall Mount Cabinets, with Thermostat

The roof-mounted fan units are compatible with all mounted wall-mounted enclosures in the ROLINE Pro series, as well as with all unmounted network and server enclosures (-EC). They are quick and easy to install in the roof module. A switch and an adjustable thermostat offer optimum customisation options. The model is available in the standard colours grey (RAL 7035) and black (RAL 9005).



#### **ROLINE 19-Inch Fan Unit with Thermostat**

The fan units can be used flexibly in any 19" enclosure. Each fan unit is supplied with two sets of mounting brackets. With the standard set, you can attach the fan unit to any height unit of your network or server enclosure. The second set enables installation in the 19" network or server cabinets from the ROLINE Pro and Basic series. A switch and an adjustable thermostat offer optimum customisation options. The model is available in the standard colours grey (RAL 7035) and black (RAL 9005).



## ROLINE 19-Inch Blanking Panel, 1UH

The blind panels are compatible with all 19" profile rails in your network or server enclosure. They are used to close off unused areas in the 19" level, which both improves the appearance and optimises air circulation.





#### ROLINE 19-Inch Keyboard Insert 1 UH, lockable

The keyboard inserts are compatible with all 19" profile rails in your network or server enclosure. They are available in various height units and offer an ideal solution for tidy storage of your documents.



## ROLINE 19-Inch Shelf 1 UH, Extendable, 350 D, < 25 kg

The pull-out shelves can be easily mounted on the four 19" profile rails of your 19" cabinets. They are made of sturdy, perforated metal with a high load-bearing capacity and therefore provide an ideal storage surface for your components. A handle included in the scope of delivery can be attached to make it easier to pull out the shelves. The shelves are available in grey (RAL 7035) and black (RAL 9005).



#### ROLINE 19-Inch Shelf, 1UH, < 50 kg Load

The permanently installable shelves can be easily attached to the four 19" profile rails of your 19" network or server enclosure. They are made of sturdy, perforated sheet metal and have a load capacity of up to 50 kg, making them the ideal storage surface for components that cannot be installed in 19" racks. The mounting rails can be adjusted as required.





#### ROLINE 19-Inch Patchpanel with Brush Strip, 1UH

The cable management panels are mounted on the 19" profile rails. With four cable routing brackets and three cable apertures with brushes, they enable easy horizontal routing of patch cables. This ensures optimum cable management in your 19" network or server enclosure.





Further variants / height units available!	Order-No.
ROLINE 19-Inch Patchpanel 1 UH, with Brush Strip, 44x60mm grey	26.21.0262
ROLINE 19-Inch Patchpanel 1 UH, with Brush Strip, 44x60mm black	26.21.0097

### ROLINE 19-Inch Patchpanel, 1UH without Brush Strip

The cable storage panels are mounted on the 19-Inch profile rails. With five cable routing brackets, they enable simple horizontal routing of the connection cables. This ensures optimum cable management in your 19-Inch network or server enclosure.





Further variants / height units available!	Order-No.	
ROLINE 19-Inch Patchpanel 1 UH, without Brush Strip, 40x60mm grey	26.21.0098	
ROLINE 19-Inch Patchpanel 1 UH, without Brush Strip, 40x60mm black	26.21.0263	

## ROLINE 19-Inch Shelf, 2UH, < 25 kg Load

The shelves can be easily integrated into the front 19" profile rails of your 19" network or server enclosure. Thanks to the sturdy, perforated perforated plate with a high load capacity, they provide an ideal storage surface for components that cannot normally be installed in a 19" rack.







More versions available!	Order-No.
ROLINE 19-Inch Shelf 2 UH 350 D, < 25kg Load, grey	26.21.0191
ROLINE 19-Inch Shelf 2 UH 350 D, < 25kg Load, black	26.21.0021

## ROLINE 3-in-1 Magnetic Wireless Charging Stand for Apple / Samsung Mobile Devices, 15W

Wireless Charging Stand for charging Qi-compatible Smartphones - the coil in the charger allows the device to be charged very quickly with up to 15W.

- Charges a compatible Apple / Samsung smartphone / smartwatch / earbuds or other suitable Qi device with up to 15 W of power
- Input power: 5V/3A, 9V/2.2A
- Plug & Play- no driver required
- E.g. for use in the office or at home
- Cable length approx. 150 cm
- Material: aluminum (stand)
- Color: silver & darkgrey

Qi wireless charging: Qi is an interface standard for inductive power transmission (wireless charging) of the "Wireless Power Consortium". Inductive charging requires two devices, a receiver (such as an iPhone 8/X) and a transmitter (charging station). The current is transmitted via coils that generate a magnetic field. The smartphone can absorb energy via this magnetic field and thus charge the integrated battery.

• Contents: Magnetic Wireless Charger, USB C-C Charging Cable, User Manual























19.11.1008

	Order-No.	– P.U.
ROLINE 3-in-1 Magnetic Wireless Charging Stand for Apple Mobile Devices, 15W	19.11.1007	- 10
ROLINE 3-in-1 Magnetic Wireless Charging Stand for SAMSUNG Mobile Devices, 15W	19.11.1008	- 10



**Available December 2025** 

**Your Distributor** 



