


# NEW Products

Edition – Spring 2026



**ROLINE Keystone Jack, Cat.8, Super Slim, RJ-45, STP, Tool-free / Page New.3**

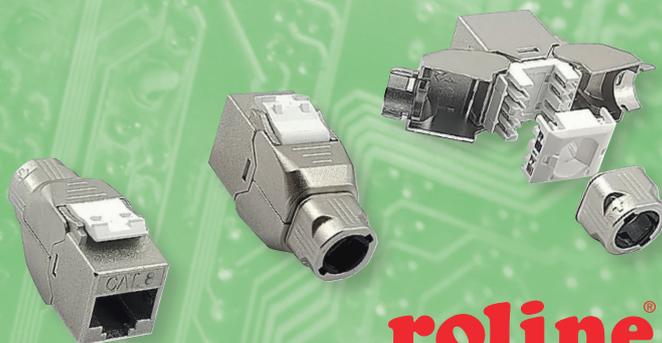

**roline**<sup>®</sup>  
Designed for Professionals

**ROLINE Heavy-Duty Gas Spring Monitor Arm, <27 kg, <144,8cm (57") / Page New.23**



**roline**<sup>®</sup>  
Designed for Professionals

**ROLINE Cable USB4 2.0, Flat, Straight-90° Angled / Page New.13**

**roline**<sup>®</sup>  
Designed for Professionals

80Gbit/s

240W  
48V / 5A



**VALUE USB - C Dock, 16-in-1, PD 100W / Page New.12**

**VALUE Wireless Audio/Video System, C – HDMI / Page New.14**



4K

2160p  
UHD-1

**Value**<sup>®</sup>



**COMPUTER ACCESSORIES & NETWORK PRODUCTS**

**NEW**

# NEWS SHOP – New Products

## ROLINE UTP Patch Cord, Cat.6 / Class E

Cat.6  
Class E

U/UTP

- Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- High quality plugs with gold plated contacts.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded copper wire.



**roline**<sup>®</sup>  
Designed for Professionals

Available April 2026

Length	grey	red	yellow	green	blue	black	white	orange	– P.U.
0.3 m	21.51.1510	21.51.1511	21.51.1512	21.51.1513	21.51.1514	21.51.1515	21.51.1516	21.51.1517	– 50
0.5 m	21.51.0930	21.51.1521	21.51.1522	21.51.1523	21.51.1524	21.51.1525	21.51.1526	21.51.1527	– 100
1 m	21.51.0931	21.51.1531	21.51.1532	21.51.1533	21.51.1534	21.51.1535	21.51.1536	21.51.1537	– 100
1.5 m	21.51.0923	21.51.0924	21.51.0925	21.51.0926	21.51.0927	21.51.0928	21.51.0929	21.51.0921	– 100
2 m	21.51.0932	21.51.1541	21.51.1542	21.51.1543	21.51.1544	21.51.1545	21.51.1546	21.51.1547	– 100
3 m	21.51.0933	21.51.1551	21.51.1552	21.51.1553	21.51.1554	21.51.1555	21.51.1556	21.51.1557	– 50
5 m	21.51.0935	21.51.1561	21.51.1562	21.51.1563	21.51.1564	21.51.1565	21.51.1566	21.51.1567	– 50
7 m	21.51.0937	–	–	–	–	–	–	–	– 50
10 m	21.51.0940	–	–	–	–	–	–	–	– 40
15 m	21.51.0945	–	–	–	–	–	–	–	– 30
20 m	21.51.0950	–	–	–	–	–	–	–	– 20

## ROLINE S/FTP (PiMF) Patch Cord, Cat.6 / Class E

Cat.6  
Class E

S/FTP

- Patch cable for networking connections between devices. Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends.
- Durable due to moulded kink protection. Flexible cable, suitable for narrow bending.
- High quality plugs with gold plated contacts.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded copper wire.
- Complete braid shielding. Pairs shielded with aluminium clad polyester foil.



**For a structured cabling system we recommend to use the following components:**

ROLINE Cat.6 S/FTP Cable, Solid Wire, AWG23: 21.15.0890 (100 m), 21.15.0891 (300 m);  
ROLINE Cat.6 Surface Mount Wall Jack, shielded: 25.16.8392 (white);  
ROLINE Cat.6 19" Patch Panel, 24 Ports, shielded: 26.11.0351 (light grey), 26.11.0361 (black);  
ROLINE Cat.6 S/FTP Patch Cord, grey, 5 m: 21.51.0835.

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.



**roline**<sup>®</sup>  
Designed for Professionals

Available April 2026



Length	grey	red	yellow	green	blue	black	white	orange	– P.U.
0.3 m	21.51.1310	21.51.1311	21.51.1312	21.51.1313	21.51.1314	21.51.1315	21.51.1316	21.51.1317	– 50
0.5 m	21.51.0830	21.51.1321	21.51.1322	21.51.1323	21.51.1324	21.51.1325	21.51.1326	21.51.1327	– 100
1 m	21.51.0831	21.51.1331	21.51.1332	21.51.1333	21.51.1334	21.51.1335	21.51.1336	21.51.1337	– 100
1.5 m	21.51.0823	21.51.0824	21.51.0825	21.51.0826	21.51.0827	21.51.0828	21.51.0829	21.51.0821	– 100
2 m	21.51.0832	21.51.1341	21.51.1342	21.51.1343	21.51.1344	21.51.1345	21.51.1346	21.51.1347	– 100
3 m	21.51.0833	21.51.1351	21.51.1352	21.51.1353	21.51.1354	21.51.1355	21.51.1356	21.51.1357	– 50
5 m	21.51.0835	21.51.1361	21.51.1362	21.51.1363	21.51.1364	21.51.1365	21.51.1366	21.51.1367	– 50
7 m	21.51.0837	21.51.1371	21.51.1372	21.51.1373	21.51.1374	21.51.1375	21.51.1376	21.51.1377	– 50
10 m	21.51.0840	21.51.1381	21.51.1382	21.51.1383	21.51.1384	21.51.1385	21.51.1386	21.51.1387	– 40
15 m	21.51.0845	21.51.1391	21.51.1392	21.51.1393	21.51.1394	21.51.1395	21.51.1396	21.51.1397	– 30
20 m	21.51.0850	21.51.1401	21.51.1402	21.51.1403	21.51.1404	21.51.1405	21.51.1406	21.51.1407	– 20

## ROLINE Keystone Jack, Cat.8 (Class I), Super Slim, RJ-45, STP, tool-free

### Cat.8 Keystones are ideal for use in 10 Gigabit Ethernet networks

Keystone in proven ROLINE quality!

- The ROLINE Cat.8 Keystones are ideal for use in Gigabit Ethernet networks
- Support data transfer rates up to 10/25/40 Gbit/s with a bandwidth of 2000 MHz
- Connect the cable to the Keystones via LSA connections without special tools- place the cable ends simply into the guides (with color coding), close and compress the module- the connection is ready for use
- The Keystone modules can be „latched“ into a 19“ module support rack, which is optionally available in black (26.11.0360) or light gray (26.11.0359).
- Dimensions (w / h / d): 14.6 x 18.8 x 36.2 mm (+/- 0.2 mm)
- Cable entrance diameter range: 6.0mm- 8.5mm
- Suitable for  
Solid cable:1/22AWG(0.65mm)-1/26AWG(0.4mm) Insulation diameter range (ID):1.1mm-1.6mm  
Stranded cable:22/7-26/7AWG Insulation diameter range (ID):1.1mm-1.6mm
- Wire coding scheme: EIA/TIA 568
- PoE compliant per IEEE 802.3af

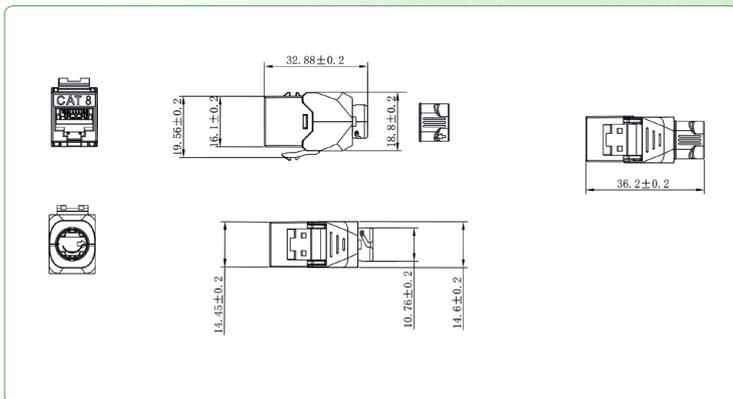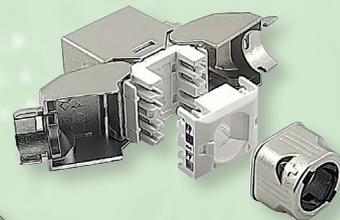

Order-No. – P.U.

ROLINE Keystone Jack, Cat.8 (Class I), Super Slim, RJ-45, STP, tool-free, silver 26.11.0382 – 10



**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026

## VALUE 19“- Fixed Shelf, 485 x 300mm, 2U, max. 25kg

### Mounting shelf for installation in 19-inch cabinets and wall-mounted enclosures

- 19“ mounting shelf with a maximum load capacity of 25 kg when using angle brackets
- Suitable for cabinets and wall-mounted enclosures from 600 mm depth
- Angle brackets included
- Contents: Mounting shelf, mounting screws, angle brackets

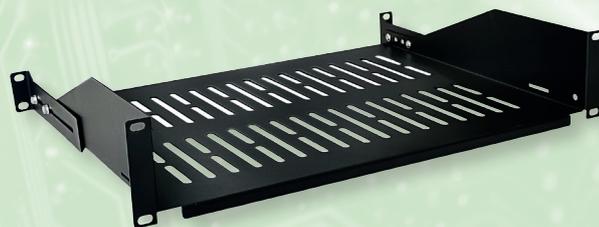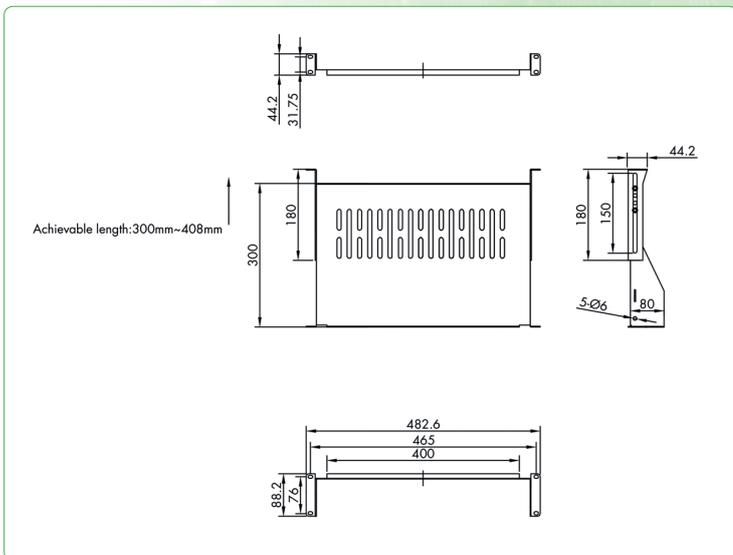

Order-No. – P.U.

VALUE 19“-Fixed Shelf, 485 x 300mm, 2U, max. 25kg, black

26.99.0408 – 5

**Value**<sup>®</sup>

Available July 2026

**NEW**

# NEWS SHOP – New Products

## ROLINE Cat.6A (Class EA) Modular Plug, Easy Pass-through, unshielded

10 unshielded Cat. 6A modular plugs for network cabling - suitable for stranded and solid wire.

- Cat. 6A Modular Plugs, 8p8c
- Unshielded
- Gold plated contacts
- For solid and stranded wire
- Suitable for stranded and solid wire cables in AWG 24- 26 It can be used for the wire OD from  $\varnothing$  0.96 –  $\varnothing$ 1.02 mm
- With wire insertion aid
- Package unit 10 plugs
- Contents: 10 Modular Plugs



Order-No. – P.U.

ROLINE Cat.6A (Class EA) Modular Plug, Easy Pass-through, unshielded, for Solid/Stranded Wire, 10 pcs.

21.17.3147 – 5

**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026

## ROLINE Cat.6A (Class EA) Modular Plug, Easy Pass-through, shielded

10 shielded Cat. 6A Modular Plugs for network cabling - suitable for stranded and solid wire.

- Cat. 6A Modular Plugs, 8p8c
- Shielded
- Gold plated contacts
- For solid and stranded wire
- Suitable for stranded and solid wire cables in AWG 24- 26 It can be used for the wire OD from  $\varnothing$  0.96 –  $\varnothing$ 1.02 mm
- With wire insertion aid
- Package unit 10 plugs
- Contents: 10 Modular Plugs



Order-No. – P.U.

ROLINE Cat.6A (Class EA) Modular Plug, Easy Pass-through, shielded, for Solid/Stranded Wire, 10 pcs.


21.17.3146 – 5

**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026

## ROLINE Boot for Easy Passthrough RJ45 Plug

- Kink protection hood for RJ-45
- To fit for jacket with OD < 6.5 mm
- The used materials enhance the durability of the boot
- Package unit 10 connectors / bag

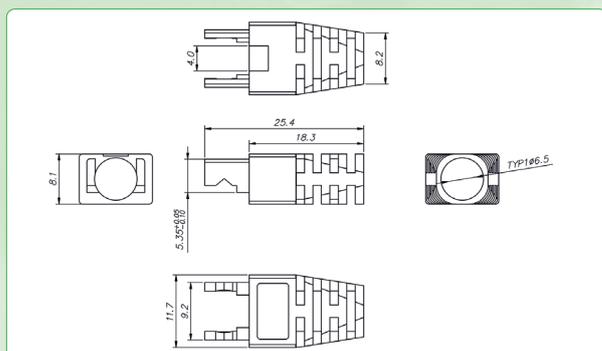

Order-No. – P.U.

ROLINE Boot for Easy Passthrough RJ45 Plug, 10 pcs., transparent

12.01.1116 – 5

**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026



## VALUE Crimper Tool for Easy Passthrough Modular Plug (21.17.3146/3147)

Solid metal pliers for cutting, stripping and crimping RJ45 plugs - adjustable for plugs with/without shield connection

- Works on shielded/unshielded easy-pass through 8P plugs (21.17.3146/3147)
- Full-cycle ratchet with safety release
- Blade-guard reduces injury during cutting and stripping operation
- Ergonomic non-slip dual-color grips enhance user comfort
- Crimp and cut the wires in one step
- Fast, reliable crimping tool
- Precision crimping tool and direct side crimping action provide more even, precise contact terminations across all Pins of the RJ45 connector.
- Compact, ergonomic design for natural, one-handed operation
- The blades are made of high-quality steel, are sharp and durable, and retain their sharpness



	Order-No.	–	P.U.
VALUE Crimper Tool for Easy Passthrough Modular Plug (21.17.3146/3147)	25.99.8795	–	5



Available June 2026


## VALUE Metal Hub, 4 Ports (1x USB-A 3.2Gen1 + 3x USB-A 2.0)

With this metal USB Hub, up to four USB devices can be connected to the USB port of a PC, regardless if the PC provides a USB Type A or a USB Type C port.

- Four USB Type A ports for connecting peripheral devices
- USB Type A or USB Type C host connection possible
- **1x port** - data transfer rates of up to 5 Gbit/s (USB 3.0/USB3.2 Gen1)
- **3x ports** - data transfer rates of up to 480 Mbit/s (compatible with USB2.0/1.1)
- Metal housing
- Plug & Play- no driver installation required
- USB cable for host connection, optionally with USB Type A or USB Type C plug

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: USB Hub and fixed USB Type A+C host connection cable

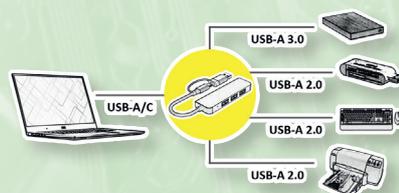

	Order-No.	–	P.U.
VALUE Metal Hub, 4 Ports (1x USB-A 3.2Gen1 + 3x USB-A 2.0), Type A+C host connection cable	12.99.1145	–	10



Available June 2026

**NEW**


# NEWSHOP – New Products

## ROLINE USB 3.2 Gen 1 Cable, A-C, M/M

USB 3.0 / USB 3.2 Gen 1 cables enable data transfer of up to 5 Gbit/s.

- Improved data encoding for more efficient data transfer leading to higher through-put
- Compatible with existing USB 3.0 / USB 3.2 Gen 1 software stacks and device protocols
- Works with both existing 5 Gbit/s USB 3.0 / USB 3.2 Gen 1 hubs and devices, as well as USB 2.0 products
- The USB Type-C defines a small reversible-plug connector for USB 3.0 / USB 3.2 Gen 1 devices
- The Type-C plug can be used at both host and device side, replacing multiple Type-B and Type-A connectors and cables
- Data transfer rates up to 5 Gbit/s
- Type: A-C

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

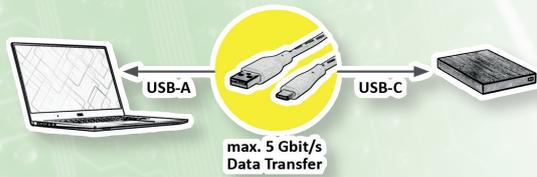

	Order-No.	– P.U.
ROLINE USB 3.2 Gen 1 Cable, A-C, M/M, black, 2 m	11.02.9007	– 10
ROLINE USB 3.2 Gen 1 Cable, A-C, M/M, black, 3 m	11.02.9008	– 10

**roline**<sup>®</sup>  
Designed for Professionals


Available June 2026

## ROLINE GOLD USB 3.2 Gen 1 Cable, A-C, M/M

- Improved data encoding for more efficient data transfer leading to higher through-put
- Compatible with existing USB 3.0 / USB 3.2 Gen 1 software stacks and device protocols
- Works with both existing 5 Gbit/s USB 3.0 / USB 3.2 Gen 1 hubs and devices, as well as USB 2.0 products
- Type: A-C

ROLINE GOLD- Top quality without any compromises! Cables in ROLINE GOLD quality come with high quality shielding and gilded contacts for contact safety even at high plug-in cycles. The plugs are gold coated to enhance their contact durability. Nylon-reinforced outer material in golden/black provides a better stability and gives the cable a stunning look.

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

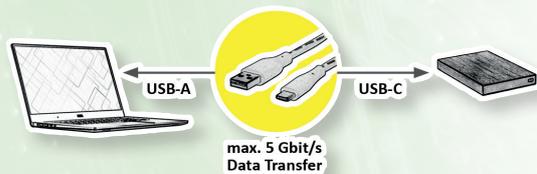

	Order-No.	– P.U.
ROLINE GOLD USB 3.2 Gen 1 Cable, A-C, M/M, 2 m	11.02.9093	– 10
ROLINE GOLD USB 3.2 Gen 1 Cable, A-C, M/M, 3 m	11.02.9094	– 10

**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026

## ROLINE GREEN USB 3.2 Gen 1 Cable, A-C, M/M

- Improved data encoding for more efficient data transfer leading to higher through-put
- Compatible with existing USB 3.0 / USB 3.2 Gen 1 software stacks and device protocols
- Works with both existing 5 Gbit/s USB 3.0 / USB 3.2 Gen 1 hubs and devices, as well as USB 2.0 products
- The USB type-C defines a new small reversible-plug connector for USB 3.0 / USB 3.2 Gen 1 devices
- The type-C plug can be used at both host and device side, replacing multiple type-B and type-A connectors and cables
- Data transfer rates up to 5 Gbit/s
- Type: A-C

ROLINE GREEN products are marked only with a paper tag and build with halogen-free TPE material, without plastic bags and without plastic cable straps for use in eco-friendly environments.


Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

- Contents: Cable without plastic bag, only marked with a paper label



Available June 2026

	Order-No.	– P.U.
ROLINE GREEN USB 3.2 Gen 1 Cable, A-C, M/M, black, 2 m	11.44.9012	– 10
ROLINE GREEN USB 3.2 Gen 1 Cable, A-C, M/M, black, 3 m	11.44.9013	– 10

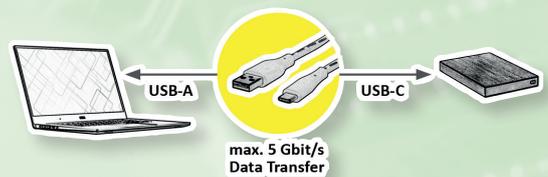

## ROLINE RM USB 3.2 Gen 1 Cable, A-C, M/M

**ROLINE RECYCLED MATERIAL USB charging and connection cables for smartphones or tablets in SuperSpeed quality allow transmission at up to 5 Gbit/s.**

- USB 3.0 / USB 3.2 Gen 1 cable in high quality with improved shielding
- Data transfer rate up to 5 Gbit/s
- Gold-plated contacts for low wear with high mating cycles
- Works with both existing 5 Gbit/s USB 3.0 / USB 3.2 Gen 1 hubs and devices, as well as USB 2.0 products

ROLINE RECYCLED MATERIAL products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).



**roline<sup>®</sup>**  
recycled material



rm > 50 %




rm = 100 %

Available June 2026



	Order-No.	– P.U.
ROLINE RM USB 3.2 Gen 1 Cable, A-C, M/M, black, 2 m	11.45.9012	– 10
ROLINE RM USB 3.2 Gen 1 Cable, A-C, M/M, black, 3 m	11.45.9013	– 10

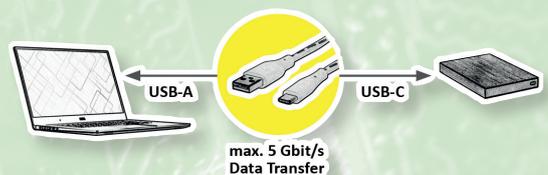

NEW

# NEWSSHOP – New Products

## ROLINE Type C - HDMI Adapter, M/F, 8K60

Connect a monitor or projector with HDMI interface to your MacBook, Ultrabook, notebook/laptop or PC with USB Type C port - with a maximum resolution of up to 7680x4320@60Hz!

- USB Type C to HDMI Cableadapter
- Connect your device with USB-C port to any HDMI display or projector
- This adapter allows you to mirror or extend your display to any HDMI-enabled TV or display
- Portable design
- No power adapter required
- Connectors: HDMI Female and Type C Male
- Cable length: ca. 13 cm

Remark: Support of „Alternate Mode (DP Alt Mode)“ required



**roline**<sup>®</sup>  
Designed for Professionals

Available May 2026

Order-No. – P.U.

ROLINE Type C - HDMI Adapter, M/F, 8K60, 0.13 m

12.03.3234 – 10

## ROLINE Type C - DP Adapter, M/F, 8K60

Connect a monitor or projector with DP interface to your MacBook, Ultrabook, notebook/laptop or PC with USB Type C port - with a maximum resolution of up to 7680x4320 @60Hz!

- USB Type C to DP Cableadapter
- Connect your device with USB-C port to any DP display or projector
- This adapter allows you to mirror or extend your display to any DP-enabled TV or display
- Portable design
- No power adapter required
- Connectors: DP Female and Type C Male
- Cable length: ca. 13 cm

Remark: Support of „Alternate Mode (DP Alt Mode)“ required



**roline**<sup>®</sup>  
Designed for Professionals

Available May 2026

Order-No. – P.U.

ROLINE Type C - DP Adapter, M/F, 8K60, 0.13 m

12.03.3235 – 10

## ROLINE DP-HDMI Adapter, M/F, 8K60

DisplayPort to HDMI adapter for connecting a graphics card with DP to a monitor with HDMI connection - with a resolution of up to 7680x4320 @60Hz!

- DisplayPort to HDMI Plug Adapter to connect an HDMI cable to a DisplayPort socket of the graphics card
- Active adapter with DisplayPort connector and HDMI socket
- DisplayPort v1.4 with resolutions up to 7680x4320 @60Hz
- Note: The DisplayPort HDMI adapter only works in one direction: the DisplayPort connector can only be used on the data source side (e.g. graphics card)



**roline**<sup>®</sup>  
Designed for Professionals

Available May 2026

Order-No. – P.U.

ROLINE 8K Adapter, DP-HDMI, M/F

12.03.3159 – 10

## ROLINE GREEN DisplayPort Cable, v2.1, 10K@60Hz

10K 4320p

**ROLINE GREEN DisplayPort Cable with DP connection on both sides for connecting an Ultrabook, Notebook/Laptop or PC to a monitor, TV or projector - for screen transmissions in excellent quality with resolutions of up to 10240x4320@60Hz!**

- DisplayPort is a universal connection standard for the transmission of picture and sound signals, widely known and appreciated in computer, industry and modern house wiring. Applications include mainly the connection of monitors or projectors to computers, notebooks/laptops, ultrabooks, NUCs and similar devices.
- The connector requires less space than VGA or DVI and is therefore more suitable for portable devices for two connectors on a graphics card (on one slot plate).
- DisplayPort v2.1 supports Display Stream Compression 1.2a (DSC), Forward Error Correction and the HDR10 standard.
- DP v2.1 can reach a maximum resolution of 10K (10240x4320) @60Hz or 4K (3840x2160) @120Hz
- The practical plug design prevents the cable from slipping out of the DisplayPort socket and guarantees a stable audio and video transmission.
- Compliant DP v2.1 (max. 10240 x 4320 @60Hz)




ROLINE GREEN products are marked only with a paper tag and build with halogen-free TPE material, without plastic bags and without plastic cable straps for use in eco-friendly environments.

Remark: Product similar to picture



Available June 2026

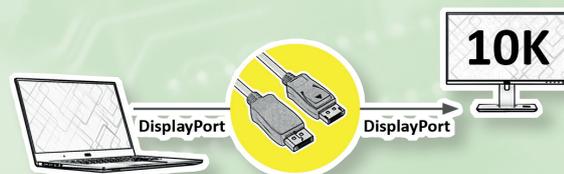

Order-No. – P.U.

ROLINE GREEN DisplayPort Cable, v2.1, 10K@60Hz, 54Gbit/s, UHBR13.5, DP-DP, M/M, black, 1 m	11.44.6020	– 10
ROLINE GREEN DisplayPort Cable, v2.1, 10K@60Hz, 54Gbit/s, UHBR13.5, DP-DP, M/M, black, 2 m	11.44.6022	– 10
ROLINE GREEN DisplayPort Cable, v2.1, 10K@60Hz, 54Gbit/s, UHBR13.5, DP-DP, M/M, black, 3 m	11.44.6023	– 10

## ROLINE GREEN DisplayPort Cable, v2.1, 16K@60Hz

16K 8640p

**ROLINE GREEN DisplayPort Cable with DP connection on both sides for connecting an Ultrabook, Notebook/Laptop or PC to a monitor, TV or projector - for screen transmissions in excellent quality with resolutions of up to 15360x8640 @60Hz!**

- DisplayPort is a universal connection standard for the transmission of picture and sound signals, widely known and appreciated in computer, industry and modern house wiring. Applications include mainly the connection of monitors or projectors to computers, notebooks/laptops, ultrabooks, NUCs and similar devices.
- The connector requires less space than VGA or DVI and is therefore more suitable for portable devices for two connectors on a graphics card (on one slot plate).
- DisplayPort v2.1 supports Display Stream Compression 1.2a (DSC), Forward Error Correction and the HDR10 standard.
- DP v2.1 can reach a maximum resolution of 16K (15360x8640 @60Hz) or 4K (3840x2160) @120Hz
- The practical plug design prevents the cable from slipping out of the DisplayPort socket and guarantees a stable audio and video transmission.
- Compliant DP v2.1 (max. 15360x8640 @60Hz)




ROLINE GREEN products are marked only with a paper tag and build with halogen-free TPE material, without plastic bags and without plastic cable straps for use in eco-friendly environments.

Remark: Product similar to picture



Available June 2026

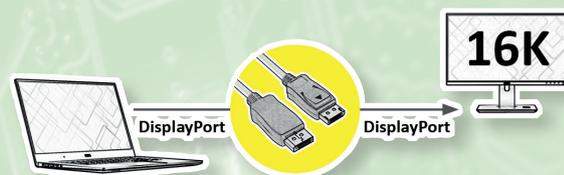

Order-No. – P.U.

ROLINE GREEN DisplayPort Cable, v2.1, 16K@60Hz, 80Gbit/s, UHBR20, DP-DP, M/M, black, 1 m	11.44.6025	– 10
ROLINE GREEN DisplayPort Cable, v2.1, 16K@60Hz, 80Gbit/s, UHBR20, DP-DP, M/M, black, 2 m	11.44.6026	– 10
ROLINE GREEN DisplayPort Cable, v2.1, 16K@60Hz, 80Gbit/s, UHBR20, DP-DP, M/M, black, 3 m	11.44.6027	– 10

NEW

# NEWS SHOP – New Products


## VALUE USB - C Dock, 4-in-1, 1x HDMI 4K30, 1x USB3.2Gen1 A, 1x USB2.0 A, 1x Type C (Power Delivery 100W)

Connect your Macbook, Ultrabook, Notebook/Laptop or PC with USB Type C dockingstation to a HDMI display or projector (with a maximum resolution of up to 3840x2160@30Hz) and another device, e.g. an external harddisk, to the additional USB Type A Port, while charging your device simultaneously over the Type C PD port!

- USB Type C to HDMI dockingstation for MacBook, Ultrabook, Notebook/Laptop or PC
- Connect your device with USB Type C port to any HDMI display or projector
- This adapter allows you to mirror or extend your display to your HDMI-enabled TV or display
- Maximum resolution: 3840x2160 @30Hz (HDMI port)
- Portable design
- No power adapter required
- 1x USB3.2 Gen 1 (5Gbit/s) / 1x USB2.0 (480Mbit/s)
- USB Type C PD: Power Delivery Function for charging of devices via the additional Type C connection (100W)
- Connectors: HDMI Female and Type C Male; additionally, 2x USB A F
- Cable length: ca. 10 cm

Remark: Support of „Alternate Mode (DP Alt Mode)“ required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

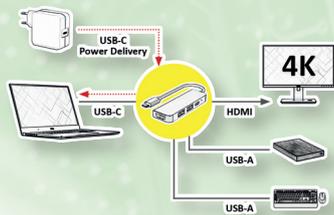

Order-No. – P.U.  
12.99.1146 – 10

Available June 2026

VALUE USB - C Dock, 4-in-1, 1x HDMI 4K30, 1x USB3.2Gen1 A, 1x USB2.0 A, 1x Type C (Power Delivery 100W)


## VALUE USB - C Dock, 7-in-1, 1x HDMI 4K60, 3x USB3.2Gen1 A, 1x SD/microSD, 1x Type C (Power Delivery 100W)

Connect your Macbook, Ultrabook, Notebook/Laptop or PC with a USB Type C dockingstation to a HDMI display or projector (with a maximum resolution of up to 3840x2160@60Hz) and another device, e.g. an external harddisk, to one of the 3 additional USB Type A Ports, while charging your device simultaneously over the Type C PD port!

- USB 3.1 Type C to HDMI dockingstation for MacBook, Ultrabook, Notebook/Laptop or PC
- Connect your device with USB Type C port to any HDMI display or projector
- This adapter allows you to mirror or extend your display to your HDMI-enabled TV or display
- Maximum resolution: 3840x2160 @60Hz (HDMI port)
- Portable design
- No power adapter required
- 3xUSB3.2 Gen 1 (5Gbit/s)
- SD/TF Card Reader Note: SD/TF cannot be supported at the same time
- USB Type C PD: Power Delivery Function for charging of devices via the additional Type C connection (100W)
- Connectors: HDMI Female and Type C Male; additionally, 3x USB 3.0 A F
- Cable length: ca. 10 cm

Remark: Support of „Alternate Mode (DP Alt Mode)“ required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

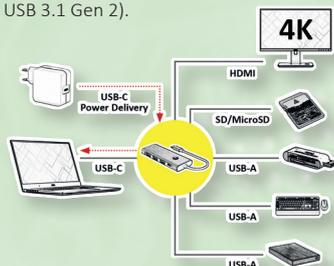

Order-No. – P.U.  
12.99.1144 – 5

Available June 2026

VALUE USB - C Dock, 7-in-1, 1x HDMI 4K60, 3x USB3.2Gen1 A, 1x SD/microSD, 1x Type C (Power Delivery 100W)


## VALUE USB - C Dock, 10-in-1, 1x HDMI+DP 4K60, 1x HDMI 4K30, 1x VGA(1080P), 1x GbE, 2x USB3.2Gen1 A, 1x C, 1x Type C (Power Delivery 100W)

Connect your Macbook, Ultrabook, Notebook/Laptop or PC with a USB Type C dockingstation to a HDMI/DP display or projector (with a maximum resolution of up to 3840x2160 @60Hz) and another device, e.g. an external harddisk, to the additional USB Type A Port, while charging your device simultaneously over the Type C PD port!

- USB 3.1 Type C to HDMI/DP/VGA dockingstation for MacBook, Ultrabook, Notebook/Laptop or PC
- Connect your device with USB Type C port to any HDMI/DP/VGA display or projector
- This adapter allows you to mirror or extend your display to your HDMI-enabled TV or display
- Maximum resolution: 3840x2160@60Hz (HDMI + DP port), 3840x2160@30Hz (HDMI port), 1920x1080 (VGA port)
- 1x Gigabit Ethernet port (GbE- 1000MBit/s)
- Portable design
- No power adapter required
- 2xUSB3.2 Gen 1 (5Gbit/s) + 1x USB-C 2.0 (480Mbit/s)
- USB Type C PD: Power Delivery Function for charging of devices via the additional Type C connection (100W)
- Connectors: HDMI / DP / VGA Female and Type C Male; additionally, 2x USB 3.0 A F and 2x USB Type C F
- Cable length: ca. 10 cm

Remark: Support of „Alternate Mode (DP Alt Mode)“ required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

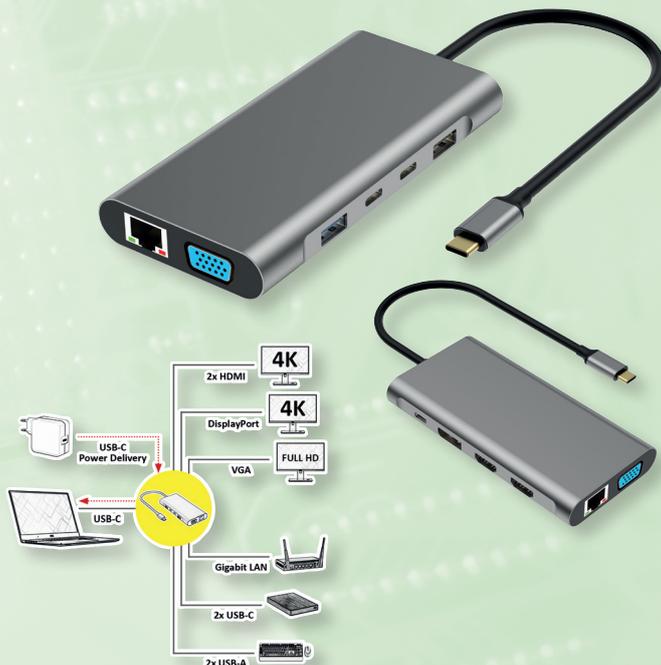

Order-No.	P.U.
VALUE USB - C Dock, 10-in-1, 1x HDMI+DP 4K60, 1x HDMI 4K30, 1x VGA(1080P), 1x GbE, 2x USB3.2Gen1 A, 1x C, 1x Type C (Power Delivery 100W)	12.99.1147 – 2



Available June 2026

## VALUE USB - C Dock, 11-in-1, 1x HDMI 4K30, 1x VGA (1080P), 1x GbE, 3x USB3.2Gen1 A, 1x C, 1x Type C (PD 100W), 1x SD/microSD

Connect your Macbook, Ultrabook, Notebook/Laptop or PC with a USB Type C dockingstation to a HDMI display or projector (with a maximum resolution of up to 3840x2160 @30Hz) and another device, e.g. an external harddisk, to the additional USB Type A Port, while charging your device simultaneously over the Type C PD port!

- USB 3.1 Type C to HDMI/VGA dockingstation for MacBook, Ultrabook, Notebook/Laptop or PC
- Connect your device with USB Type C port to any HDMI/VGA display or projector
- This adapter allows you to mirror or extend your display to your HDMI-enabled TV or display
- Maximum resolution: 3840x2160 @30Hz (HDMI port), 1920x1080 (VGA port)
- 1x Gigabit Ethernet port (GbE- 1000MBit/s)
- Portable design
- No power adapter required
- 3xUSB3.2 Gen 1 (5Gbit/s) + 1x USB-C 2.0 (480Mbit/s)
- SD/TF Card Reader Note: SD/TF cannot be supported at the same time
- USB Type C PD: Power Delivery Function for charging of devices via the additional Type C connection (100W)
- Connectors: HDMI / VGA Female and Type C Male; additionally, 3x USB 3.0 A F and 1x USB Type C F
- Cable length: ca. 10 cm

Remark: Support of „Alternate Mode (DP Alt Mode)“ required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1)

1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).



Order-No.	P.U.
VALUE USB - C Dock, 11-in-1, 1x HDMI 4K30, 1x VGA (1080P), 1x GbE, 3x USB3.2Gen1 A, 1x C, 1x Type C (Power Delivery 100W), 1x SD/microSD	12.99.1143 – 5



Available June 2026

NEW

# NEWSSHOP – New Products

**VALUE USB - C Dock, 16-in-1, 2x HDMI 4K60, 1x DP 4K60, 1x GbE, 5x USB A, 2x USB C, 1x Type C PD 100W, 1x SD/microSD, 1x Audio**



Connect your Macbook, Ultrabook, Notebook/Laptop or PC with USB Type C dockingstation to a HDMI/DP display or projector (with a maximum resolution of up to 3840x2160@60Hz) and another device, e.g. an external harrdisk, to one of the additional USB Type A Ports, while charging your device simultaneously over the Type C PD port!

- USB 3.1 Type C to HDMI/DP docking station for MacBook, Ultrabook, Notebook/Laptop or PC
- Connect your device with USB Type C port to any HDMI/DisplayPort display or projector
- This adapter allows you to mirror or extend your display to your HDMI-enabled TV or display
- Maximum resolution: 3840x2160 @60Hz (2x HDMI port / 1x DP Port)
- 1x Gigabit Ethernet port (GbE- 1000Mbit/s)
- 2x A USB3.2 Gen2 (10Gbit/s) + 2x USB3.2 Gen1 A+C (5Gbit/s) + 2x USB A 2.0 (480Mbit/s) + 1x C USB3.2 Gen2(10Gbit/s)
- 1x SD/TF Card Reader
- USB Type C PD: Power Delivery Function for charging of devices via the additional Type C connection (100W)
- Swivel stand (rubberized bottom) for setting up the docking station

Remark: Support of „Alternate Mode (DP Alt Mode)“ required

Note: According to the current specifications of USB.org we have adapted the technical data of our USB 3 products. The new designation for the already known USB specifications has been changed to USB 3.2 Gen 1 (formerly USB 3.0 / USB 3.1 Gen 1) and USB 3.2 Gen 2 (formerly USB 3.1 / USB 3.1 Gen 2).

## 15-in-1 Multifunctional Expansion

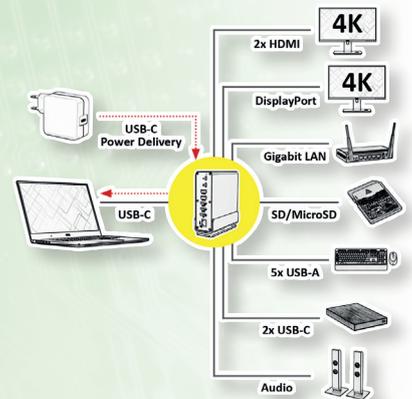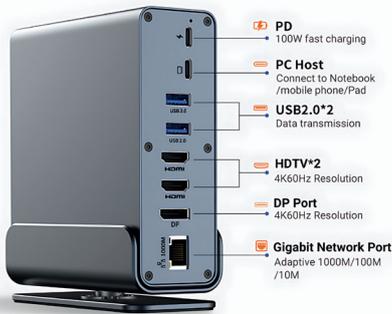

Order-No. – P.U.



VALUE USB - C Dock, 16-in-1, 2x HDMI 4K60, 1x DP 4K60, 1x GbE, 5x USB A, 2x USB C, 1x Type C (Power Delivery 100W), 1x SD/microSD, 1x Audio

12.99.1142 – 2

Available June 2026

## ROLINE Cable USB4 2.0, Flat, Straight-90° Angled

80Gbit/s


240W  
48V / 5A

High-quality full-featured USB4 2.0 Cable with the reversible USB Type-C connector on both ends for data transfer rates of up to 80 Gbit/s and USB Power Delivery up to 240 W (48V / 5A).

- Flat design
- Full-featured USB4 2.0 cable with improved shielding
- Very flexible thanks to the TPE cable jacket
- With the reversible Type-C connector at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Resolution up to single 8K@60Hz or dual 4K@60Hz
- Suitable for data transfer rates of up to 80 Gbit/s
- Supports USB Power Delivery up to 240 W (48V / 5A)
- Straight-90° Angled

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called „protocol tunneling“ that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

- Contents: USB4 cable

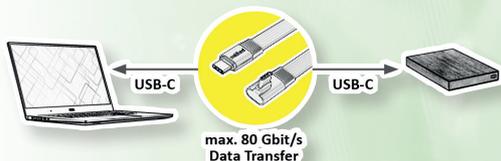

**roline**<sup>®</sup>  
Designed for Professionals

Order-No. – P.U.  
11.02.9098 – 20

ROLINE Cable USB4 2.0, Flat, Straight-90° Angled, with Emark, C-C, M/M, 8K UHD-2, 80Gbit/s, 240W, black, 0.8 m

Available May 2026

## ROLINE Cable USB4 2.0, Flat, Straight-90° Angled

80Gbit/s


240W  
48V / 5A

High-quality full-featured USB4 2.0 Cable with the reversible USB Type-C connector on both ends for data transfer rates of up to 80 Gbit/s and USB Power Delivery up to 240 W (48V / 5A).

- Flat design
- Full-featured USB4 2.0 cable with improved shielding
- Very flexible thanks to the TPE cable jacket
- With the reversible Type-C connector at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Resolution up to single 8K@60Hz or dual 4K@60Hz
- Suitable for data transfer rates of up to 80 Gbit/s
- Supports USB Power Delivery up to 240 W (48V / 5A)
- Straight-90° Angled

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called „protocol tunneling“ that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

- Contents: USB4 cable

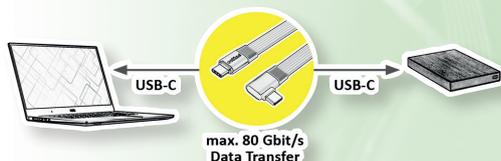

**roline**<sup>®</sup>  
Designed for Professionals

Order-No. – P.U.  
11.02.9099 – 20

ROLINE Cable USB4 2.0, Flat, Straight-90° Angled, with Emark, C-C, M/M, 8K UHD-2, 80Gbit/s, 240W, black, 0.13 m

Available May 2026

NEW

# NEWS SHOP – New Products

## ROLINE Cable USB4 2.0, Flat, Straight-270° Angled

80Gbit/s


240W  
48V / 5A

High-quality full-featured USB4 2.0 Cable with the reversible USB Type-C connector on both ends for data transfer rates of up to 80 Gbit/s and USB Power Delivery up to 240 W (48V / 5A).

- Flat design
- Full-featured USB4 2.0 cable with improved shielding
- Very flexible thanks to the TPE cable jacket
- With the reversible Type-C connector at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Resolution up to single 8K@60Hz or dual 4K@60Hz
- Suitable for data transfer rates of up to 80 Gbit/s
- Supports USB Power Delivery up to 240 W (48V / 5A)
- Straight-270° Angled

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called „protocol tunneling“ that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

- Contents: USB4 cable

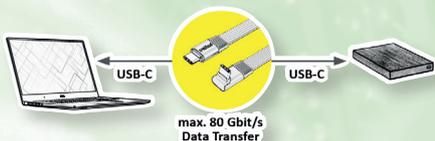

**roline**<sup>®</sup>  
Designed for Professionals

Available May 2026



Order-No. – P.U.

ROLINE Cable USB4 2.0, Flat, Straight-270° Angled, with Emark, C-C, M/M, 8K UHD-2, 80Gbit/s, 240W, black, 0.8 m 11.02.9097 – 20

## VALUE Wireless Audio/Video System, C – HDMI

- Designed for meetings, presentations, classrooms, and home entertainment.
- The devices are connected via USB C and HDMI. The devices enable wireless transmission of the HDMI signal between transmitter and receiver over a distance of up to 10m.
- Integrates a powerful video encoder/decoder and a 5 GHz WLAN module with highly sensitive antennas for high-performance screen mirroring.
- Transmits an audio/video signal wirelessly
- Audio/video transmission up to 10m distance between source and display device
- Resolution: Supports Full HD (1920x1080 @60Hz)
- Simply connect the USB-C transmitter to your laptop and enjoy one-click sharing
- Color: white
- Solves the common problem of laptops being too far away from an interactive white-board (IWB) or interactive flat panel (IFP) for conventional HDMI cables to reach.
- With IEEE 802.11n 5GHz 1T1R Wifi
- Wi-Fi Security: Up to WPA3-Personal
- Supports Screen Mirror/ Extend (Windows/macOS/ iOS/Android)
- The transmitter (TX) is a Type-C with DP-Alt required for System or SmartPhone

- Fast charging of Notebook/ Tablet/ Smart Phone via the transmitter that supports USB-C Power Delivery
- Contents: Transmitter, receiver, manual

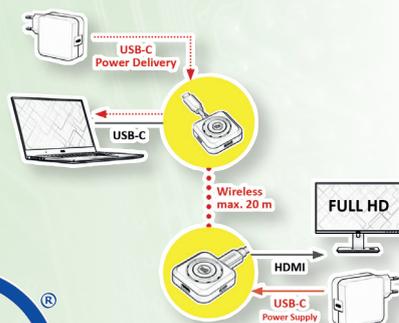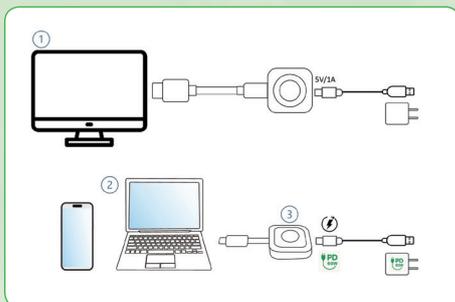

**Value**<sup>®</sup>

Available June 2026


Order-No. – P.U.

VALUE Wireless Audio/Video System, C - HDMI, 10 m 14.99.3417 – 10

## VALUE USB Wall Charger, EU Plug, 2x Ports (A+C), 20W /30W

**2-ports USB charger, 1x Type A + 1x Type C with maximum 20W/30W for powering a smartphone/tablet, external SSD/HDD or other devices**

- For charging or as a power supply from a device via its USB input
- Perfect supplement for your Wireless Charger, as the scope of delivery often does not include plug-in power supplies
- Suitable, for example, for smartphone/tablet, external SSD/HDD enclosures and other devices
- Quick Charge 3.0/ Type-C (PD) supported
- Multi-Protection: Over Current / Short Circuit / Over Voltage / Overheat Protection
- Plug-in power supply with two USB outputs, type A+C socket

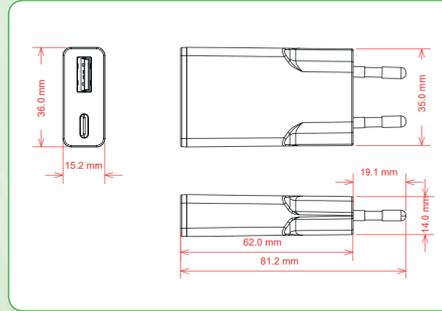

### Technical data

Description	19.99.1110	19.99.1111
<b>Input Voltage:</b>	100- 240V AC, 50- 60Hz	100- 240V AC, 50- 60Hz
<b>Output USB-C:</b>	3.3-11V/3A, 3.3-16V/1.8A (PPS) 5V 3A, 9V 2.22A, 12V 1.67A (20W max.)	3.3-11V/3A, 3.3-16V/2A (PPS) 5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W max.)
<b>Output USB-A:</b>	5V 3A, 9V 2A, 12V 1.5A (18W max.)	5V 3A, 9V 2A, 12V 1.5A (18W max.)
<b>Output USB-A+USB-C:</b>	5V 3A (15W max.)	5V 3A (15W max.)
<b>Output Power:</b>	20W	30W
<b>Dimensions (HxDxW):</b>	81.2x35x15.3 mm	81.2x35x15.3 mm

	Order-No.	- P.U.
VALUE USB Wall Charger, EU Plug, 2x Ports (A+C), 20W, white	19.99.1110	- 10
VALUE USB Wall Charger, EU Plug, 2x Ports (A+C), 30W, white	19.99.1111	- 10



Available June 2026

## VALUE USB Wall Charger, EU/US Plug, 2x Ports (A+C), 65W

**2-ports USB charger, 1x Type A + 1x Type C with maximum 65W for powering a smartphone/tablet, external SSD/HDD or other devices**

- For charging or as a power supply from a device via its USB input
- Perfect supplement for your Wireless Charger, as the scope of delivery often does not include plug-in power supplies
- **Removable EU plug**
- Suitable, for example, for smartphone/tablet, external SSD/HDD enclosures and other devices
- Quick Charge 3.0/ Type-C (PD) supported
- Multi-Protection: Over Current / Short Circuit / Over Voltage / Overheat Protection

### Technical data

- Plug-in power supply with two USB outputs, type A+C socket
- Input voltage: 100- 240V AC, 50- 60Hz
- Output USB-C:  
3.3-11V/3A, 3.3-16V/2A (PPS)  
5V 3A, 9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A (30W Max)
- Output USB-A: 5V 3A, 9V 2A, 12V 1.5A (18W Max)
- Output USB-A+USB-C: 5V3A (15W Max)
- Output power: 65W
- Dimensions: 81.2x35x15.3 mm



Available June 2026

	Order-No.	- P.U.
VALUE USB Wall Charger, EU/US Plug, 2x Ports (A+C), 65W, white	19.99.1112	- 10



**NEW**

# NEWS SHOP – New Products

## VALUE Power Strip 2-PIN Euro Type, 3/6-way, with Switch

### Power Strip with 3x or 6x 2-pin Euro Type sockets.

- 3/6-way power strip with plastic housing
- Equipped with three/six 2-pin Euro Type AC sockets
- Input voltage: AC 250V 60Hz
- Three/six AC socket output: AC 250V/2,5A
- 1.5m supply cable with low-profile angled safety plug for easy unplugging
- Colour: white

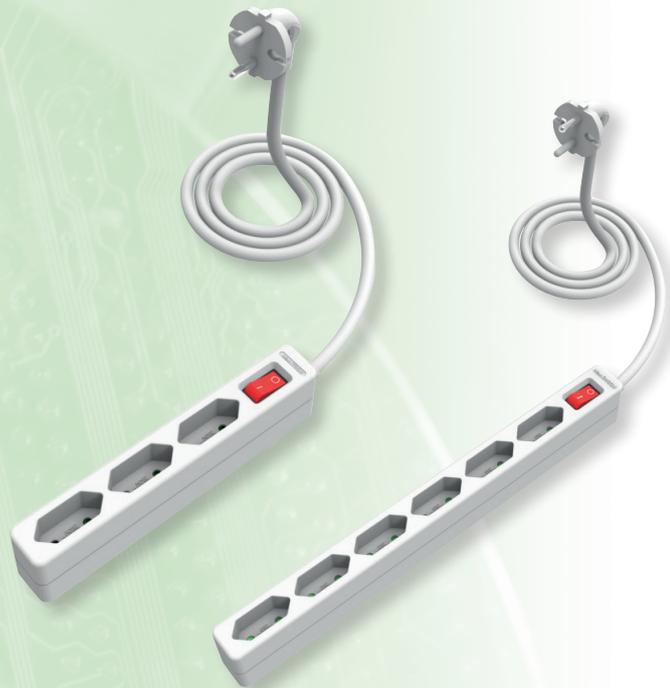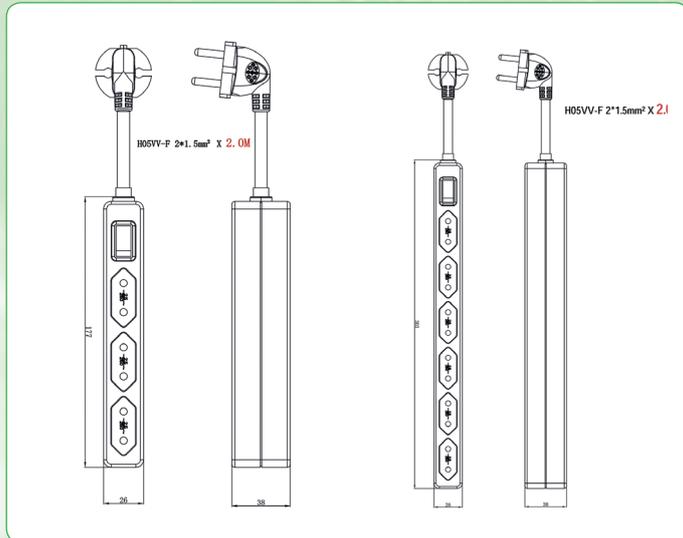

Order-No. – P.U.

VALUE Power Strip 2-PIN Euro Type, 3-way, with Switch, 1.5 m

19.99.0971 – 10

VALUE Power Strip 2-PIN Euro Type, 6-way, with Switch, 1.5 m

19.99.0972 – 10


**Value**<sup>®</sup>

Available June 2026

## VALUE Power Strip, 4-way, with Switch and Removable Protective Cover

### VALUE Power Strip with 4 German Type Sockets and removable protective cover.

- 4-way power strip with plastic housing
- With switch in the center
- 1.5m supply cable with low-profile angled safety plug for easy unplugging
- Cable management
- Colour: white

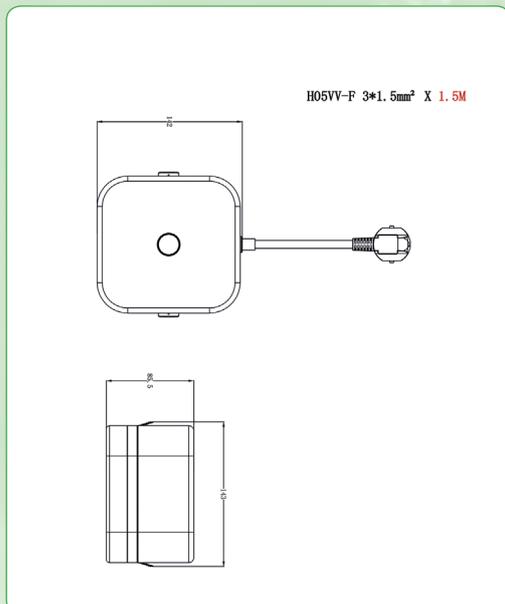

Order-No. – P.U.

VALUE Power Strip, 4-way, with Switch and removable protective cover, white, 1.5 m

19.99.0973 – 5


**Value**<sup>®</sup>

Available June 2026

## VALUE Power Strip, 5-way, with Switch and Cable Management, round

### VALUE Power Strip (round) with 5 German Type Sockets and Cable Management possibility.

- 5-way power strip with plastic housing
- Sockets are arranged in ring shape
- With push switch in the center
- 1.5m supply cable with low-profile angled safety plug and latch for easy unplugging
- Cable management
- Colour: white

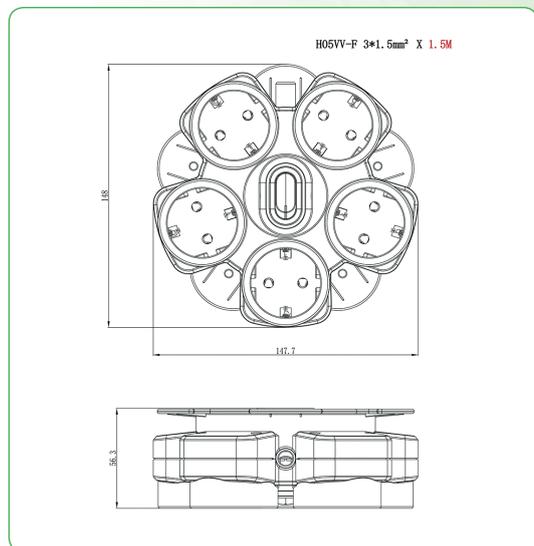

Order-No. – P.U.

VALUE Power Strip, 5-way, with Switch and Cable Management, round, white, 1.5 m

19.99.0976 – 5

Value<sup>®</sup>


Available June 2026

## VALUE Power Cable, straight IEC Connector, Italy Version

### Cable with straight Italy plug and IEC 320-C13

Cable with straight Italy plug and IEC 320-C13

- Plugs: Italy plug to C13 plug
- Nominal data: 250V AC/2.5A
- Colour: black

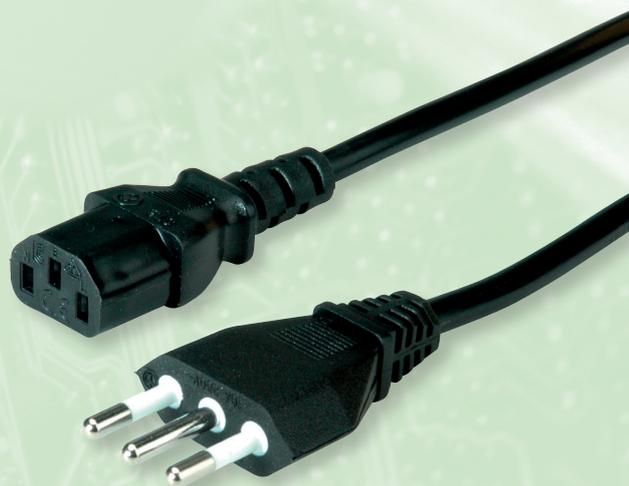

Order-No. – P.U.

VALUE Power Cable, straight IEC Connector, Italy Version, black, 0.6 m

19.99.2073 – 50

VALUE Power Cable, straight IEC Connector, Italy Version, black, 0.8 m

19.99.2074 – 50

VALUE Power Cable, straight IEC Connector, Italy Version, black, 1 m

19.99.2075 – 20

VALUE Power Cable, straight IEC Connector, Italy Version, black, 3 m

19.99.2076 – 20

VALUE Power Cable, straight IEC Connector, Italy Version, black, 5 m

19.99.2077 – 20

Value<sup>®</sup>

Available July 2026

NEW

# NEWSHOP – New Products

## ROLINE Power Cable, straight IEC Connector, lockable

- Lockable IEC power cable
- Ideal for industrial environments subject to vibration or accidental disconnection in data centers/network cabinets
- Cable with safety plug 90° angled (CEE 7/7 german type) and IEC 320-C13
- Plugs: CEE 7/7 safety plug to C13 plug
- Nominal data: 250V AC/10A



	Order-No.	– P.U.
ROLINE Power Cable, straight IEC Connector, lockable, black, 0.8 m	19.08.1035	– 25
ROLINE Power Cable, straight IEC Connector, lockable, black, 1.8 m	19.08.1036	– 25
ROLINE Power Cable, straight IEC Connector, lockable, black, 3 m	19.08.1037	– 10

**roline**<sup>®</sup>  
Designed for Professionals

Available July 2026

## ROLINE Power Cable, straight IEC Connector - C19 16A, lockable

**Increases the reliability of power distribution in data center/IT environment, critical devices, PDUs, servers, network equipment, etc.**

- Cable with single-sided IEC lock (C19)
- The pull-out-proof lockable C19 socket of the power cable does not require a specific connector/or socket on the side of the C19 connection
- Protects hardware from accidental power failures/disconnection of the power supply
- Prevents power cables from slipping out in used application areas
- Easy to handle: Locking and unlocking takes place on the IEC socket side
- Connection cable 16 A with IEC320 C19 Female and 3P German connector plug, angled
- Cable: H05VV-F 3G1.5 3x 1.5mm<sup>2</sup>
- Nominal data: 250 VAC/16 A
- Colour: black



	Order-No.	– P.U.
ROLINE Power Cord 3P German Connector, IEC320 - C19 16A, Lockable, 0.8 m	19.08.1038	– 25
ROLINE Power Cord 3P German Connector, IEC320 - C19 16A, Lockable, 1.8 m	19.08.1039	– 25
ROLINE Power Cord 3P German Connector, IEC320 - C19 16A, Lockable, 3 m	19.08.1040	– 10


**roline**<sup>®</sup>  
Designed for Professionals

Available July 2026

## ROLINE Power Cable, straight IEC Connector

A great solution for neat cable management in any data center! We recommend our colored monitor power cables, e.g. 19.08.1520 (C14-C13), as additional products.

- Cable with safety plug 90° angled (CEE 7/7 german type) and IEC 320-C13
- Color: red
- Plugs: CEE 7/7 safety plug to C13 plug
- Nominal data: 250V AC/10A

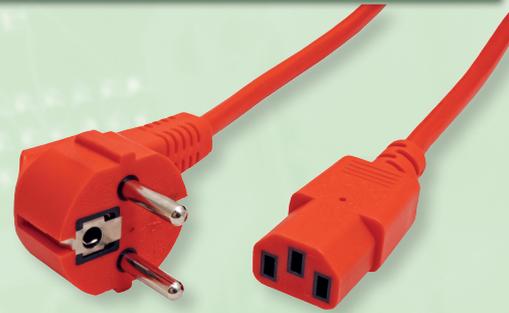

**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026

	Order-No.	– P.U.
ROLINE Power Cable, straight IEC Connector, red, 0,8 m	19.08.1004	– 25
ROLINE Power Cable, straight IEC Connector, red, 3 m	19.08.1019	– 25

## ROLINE Multifunctional Thin Client CPU Mount


Save space by mounting your thin client to the rear of the monitor using the VESA plate!

- Multifunctional Thin Client CPU Mount, which allows users to place their CPU in a convenient and easily accessible location
- Suitable for a lot of types of thin clients and small cpus
- Adjustable width of 5-70mm (0.2"-2.8") allows the mount to be sized to the thickness of various CPUs
- Versatile installation which includes mounting directly to the rear of the monitor using the VESA plate or freestanding on a desk or surface
- Installation: VESA Compatible / Freestanding
- Simple design
- Organizational tool for home or office
- Maximum weight should not exceed 3 kg

Material: Plastic, Steel  
Color: Black  
Dimensions: 196 x 109 x 106mm  
Load Capacity: 3 kg  
Width Range: 5- 70mm (0.2"-2.8")



Dimensions (mm)

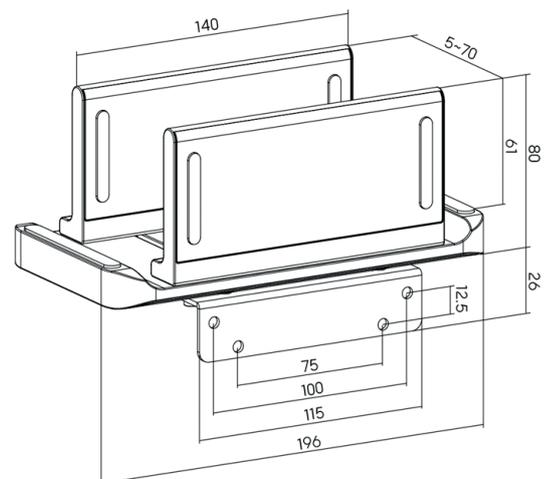

**roline**<sup>®</sup>  
Designed for Professionals

Available June 2026

	Order-No.	– P.U.
ROLINE Multifunctional Thin Client CPU Mount	17.03.0035	– 5

NEW

# NEWS SHOP – New Products

## VALUE Universal Projector Ceiling Mount


VALUE universal ceiling mount for projectors up to 13.5kg, perfect for use in classrooms, boardrooms, hotels, bars and restaurants...

- Universal ceiling mount for projectors up to 13.5kg
- This projector mount is perfect for use in classrooms, boardrooms, hotels, bars and restaurants...
- Offers multidirectional positioning with four adjustable support arms that can fit a wide range of mounting holes.
- The quick release connector allows the projector to be installed quickly and then easily released for maintenance, without re-alignment.
- 360° Rotating Joint for optimal viewing angles
- Swiveling Joint offers maximum viewing flexibility
- Adjustable Support Arms
- Cable Management
- Colour: black

### Specifications:

Material: Steel  
 Dimensions: 334 x 334 x 150mm (13.1"x13.1"x5.9")  
 Max. Load Capacity: 13.5kg  
 Mounting Range: 54- 320mm (2.1" - 12.6")  
 Tilt Range: +15°--15°  
 Swivel Range: +15°--15°  
 Rotation: 360°  
 Extension Range: 150mm  
 Cable Management: Yes

- Contents: Projector Ceiling Mount, Mounting Material, Installation Instructions

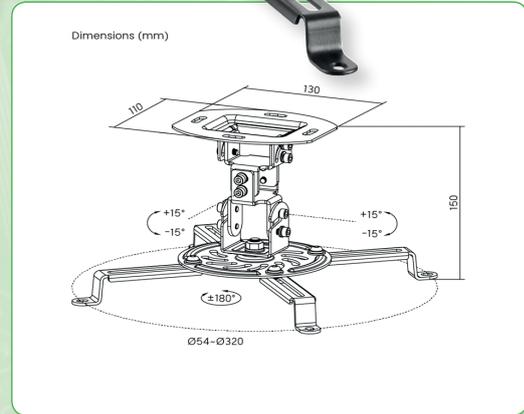

Order-No. – P.U.

VALUE Universal Projector Ceiling Mount, up to 13,5 kg, black

17.99.1095 – 4



Available July 2026


## VALUE Heavy-Duty Projector Ceiling Mount

VALUE heavy-duty ceiling mount for projectors up to 45kg, perfect for use in classrooms, boardrooms, hotels, bars and restaurants...

- Universal ceiling mount for projectors up to 45 kg
- This projector mount is perfect for use in classrooms, boardrooms, hotels, bars and restaurants...
- Offers multidirectional positioning with four adjustable support arms that can fit a wide range of mounting holes.
- The quick release connector allows the projector to be installed quickly and then easily released for maintenance, without re-alignment.
- 360° Rotating Joint for optimal viewing angles
- Swiveling Joint offers maximum viewing flexibility
- Adjustable Support Arms
- Cable Management
- Colour: black
- Contents: Projector Ceiling Mount, Mounting Material, Installation Instructions

### Specifications:

Material: Steel  
 Dimensions: 255 x 470 x 470mm(10" x 18.5" x 18.5")  
 Max. Load Capacity: 45 kg  
 Mounting Range: 130- 470mm (5.1" - 18.5")  
 Tilt Range: +20°--20°  
 Swivel Range: +8°~8°  
 Rotation: +180°--180°  
 Extension Range: 255mm  
 Installation: Ceiling Mounted  
 Cable Management: Yes

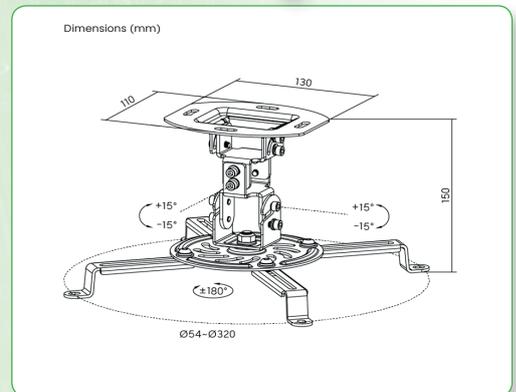

Order-No. – P.U.

VALUE Heavy-Duty Projector Ceiling Mount, up to 45 kg, black

17.99.1096 – 2




Available July 2026

## VALUE Vertical Lift Free-Standing Single-Screen Monitor Stand, , < 124,46cm (49"), Heavy Duty <18 kg

This monitor arm combines functionality and style to transform any workspace into a more organized and productive area. Suitable for office, home, or gaming setups.

- For monitors weighing up to 18kg and VESA 75/100!
- Meets VESA 75 (75 x 75 mm) and VESA 100 (100 x 100 mm)
- Max. load capacity up to 18 kg
- Fit Screen Size: 43,18cm (17") to 124,46cm (49")
- Installation with clamp or freestanding
- With quick release VESA plate
- Tilt Range: +60° --20°
- Swivel Range: +15° --15°
- Screen Rotation: +180° to-180°
- Suggested Desktop Thickness: 10 – 85mm
- Contents: Monitor Arm, Installation Instructions

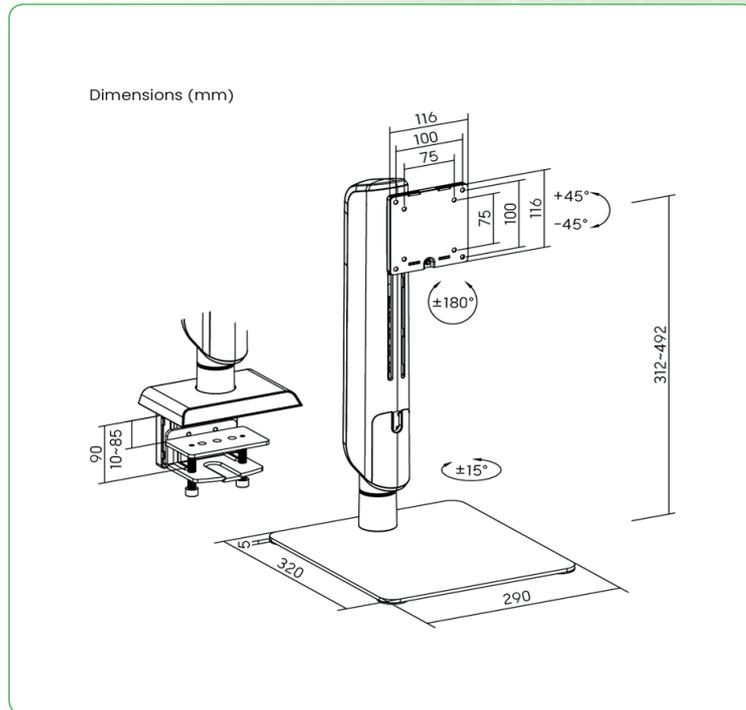

Available July 2026

Order-No. – P.U.

17.99.1094 – 2

VALUE Vertical Lift Free-Standing Single-Screen Monitor Stand, , < 124,46cm (49"), Heavy Duty <18 kg, black

NEW

# NEWS SHOP – New Products

## ROLINE Heavy-Duty Gas Spring Monitor Arm, Wall Mount, <27kg, <144,78cm (57")

- Heavy-Duty Wall-Mounted Gas Spring Monitor Arm
- Ergonomic comfort and style
- High-performance, durable structure
- Provides exceptional strength to support most 60,96cm – 144,78cm (24" to 57") screens weighing up to 27kg
- Smooth and effortless adjustments ensure a perfect viewing angle
- Additionally, the quick-release VESA plate
- Meets VESA 75 (75x75 or VESA 100 (100x100 mm)

Specifications:

Material: Steel, Aluminum, Plastic

Surface Finish: Powder Coating

Color: Matte Black

Dimensions: 116 x 600 x 583mm (4.6" x 23.6" x 23")

Fit Screen Size: 24" – 57"

Fit Curved Monitor: Yes

Max. Load Capacity (per screen): < 27 kg

Max. Load Capacity for Curved Screen: < 22kg

VESA Compatible: 75x75, 100x100

Tilt Range: +60° – -20°

Swivel Range: +90° – -90°

Screen Rotation: +90° – -90°



Arm Full Extension: 550 mm

Installation: Wall Mounted

Profile: 101 – 651mm

Quick Release VESA Plate: Yes

Cable Management: Yes

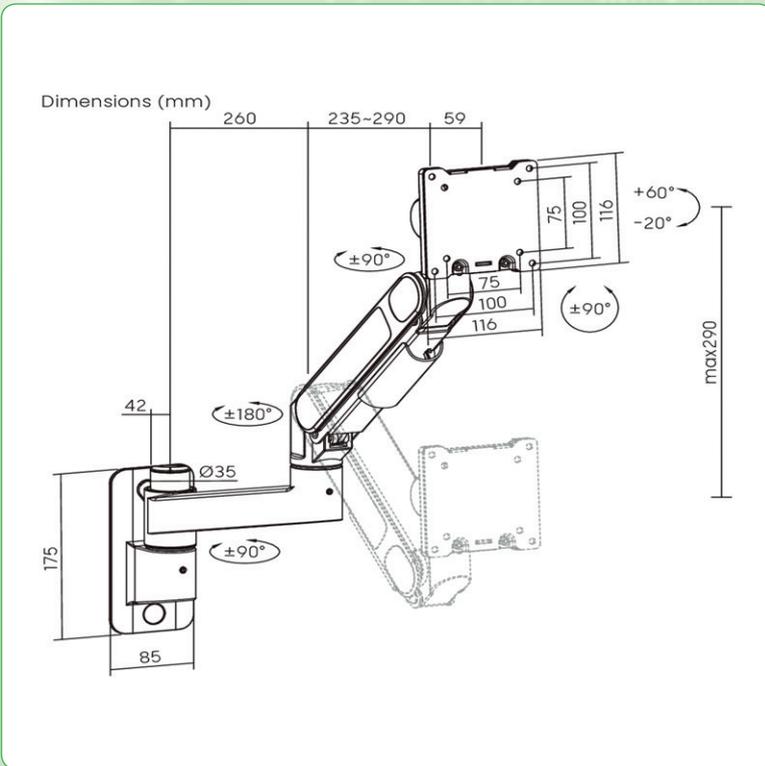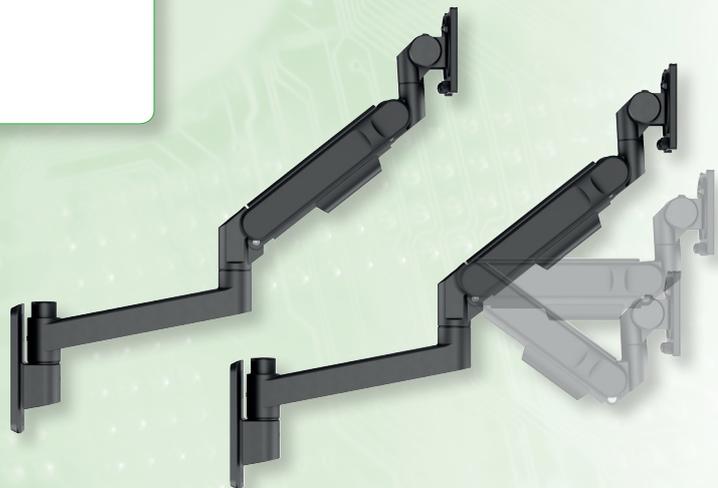

Order-No. – P.U.

**roline**<sup>®</sup>  
Designed for Professionals

ROLINE Heavy-Duty Gas Spring Monitor Arm, Wall Mount, <27kg, <144,78cm (57")

17.03.1219 – 2

Available July 2026

## ROLINE Heavy-Duty Gas Spring Monitor Arm, <27 kg, <144,8cm (57")

Heavy-Duty monitor arm which allows to experience the ultimate ergonomic comfort and style. The high-performance and build-to-last structure provides exceptional strength to support most up to 57" screens weighing up to 27kg.

- Smooth and effortless adjustments ensure a perfect viewing angle
- Moreover, the quick-release VESA plate and topside installation base with rotation stop function
- Supports desk clamp/grommet mounting
- Suggested Desktop Thickness: Clamp:10 – 45mm Grommet:10 – 40mm
- VESA Compatible: 75x75, 100x100, 100x200, 200x100, 200x200
- Max. Load Capacity (per screen): < 27 kg
- Max. Load Capacity for Curved Screen: <22 kg
- Tilt Range: +60° – -20°
- Swivel Range: +90° – -90°
- Screen Rotation: +90° – -90°
- Arm Full Extension: 485mm


Material: Steel, Aluminum, Plastic  
Color: Matte Black

Dimensions: 131 x 550 x 730mm


Fit Screen Size: 24"-57"

Fit Curved Monitor: Yes

Cable Management: Yes

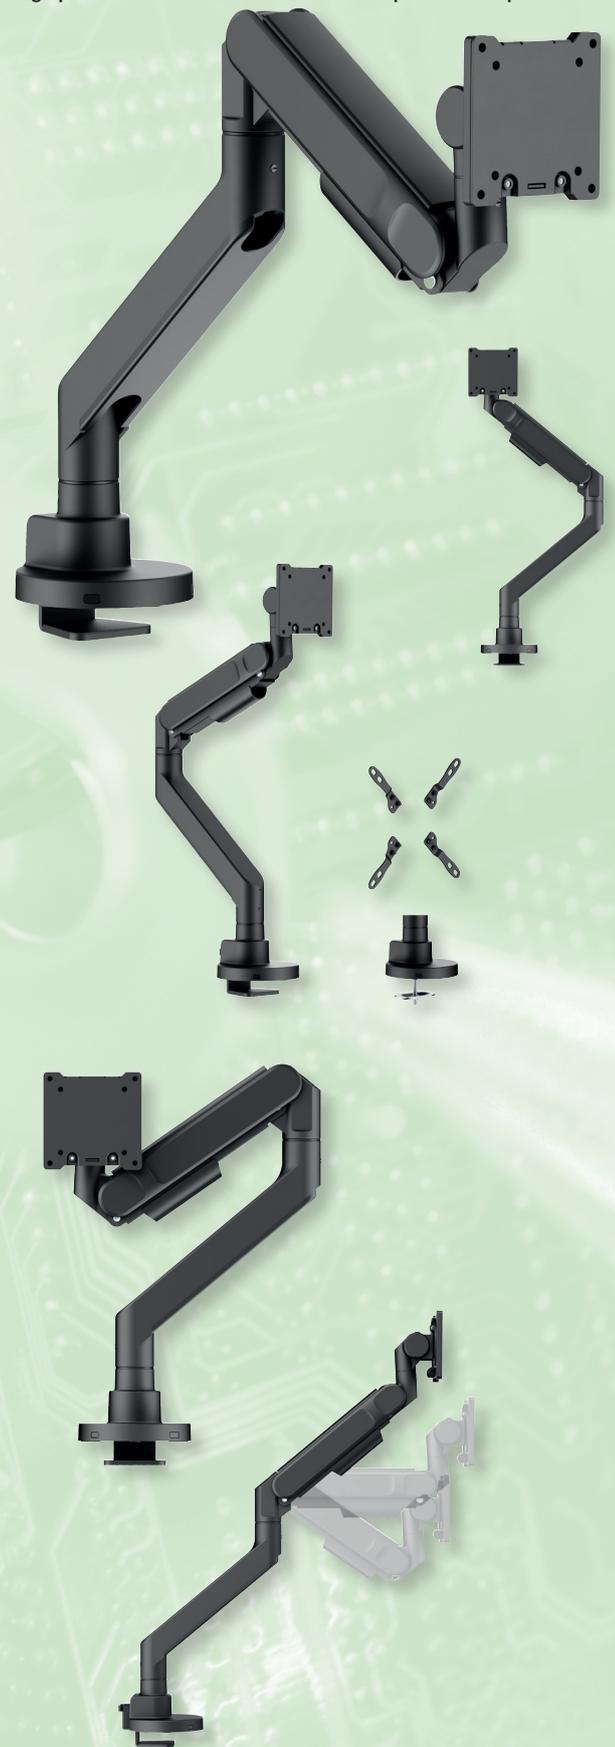

Dimensions (mm)

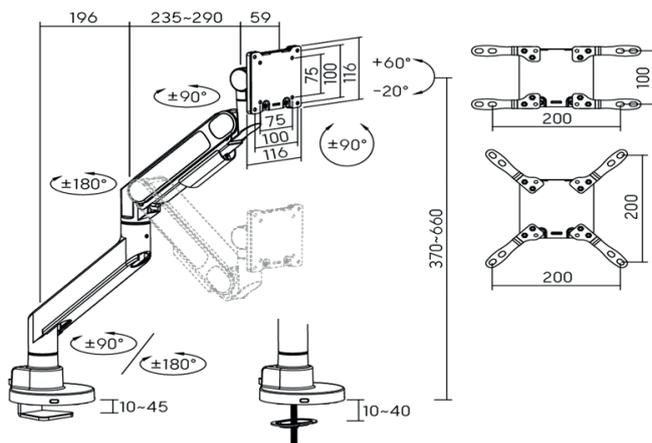

Order-No. – P.U.

ROLINE Heavy-Duty Gas Spring Monitor Arm, <27 kg, <144,8cm (57")

17.03.1221 – 2

**roline**<sup>®</sup>  
Designed for Professionals

Available July 2026

NEW

# NEWS SHOP – New Products



VALUE Wall Mount TV Holder, Heavy-Duty, Extend-Out Tilt, <80 kg, <266,7cm (105"), 1000x600

Stable TV wall mount with a load capacity up to 80kg and a mount support of maximum VESA 1000x600.

- For screens from 55" to 105" (max. VESA 1000x600)
- Load capacity up to 80kg
- Securing against unintentional loosening of the mounting hooks
- Anti-Theft Locking Hole
- Automatic Spring Locks with Quick Release Cords
- Magnetic Strap End
- Integrated spirit level
- Material: Steel
- Color: Black
- Dimensions: 172x1070x625mm (6.8"x42.1"x24.6")
- Fit Screen Size: 55"- 105"
- Fits Curved TVs: Yes
- Mounting Hole Pattern: VESA & Universal
- Max. Mounting Hole: 1000x602mm
- Weight Capacity: 80kg
- Profile: 53~172mm (2.1"~6.8")
- Tilt Range: +10° ~-15°
- Swivel Range: +10° ~-10°



Dimensions (mm)

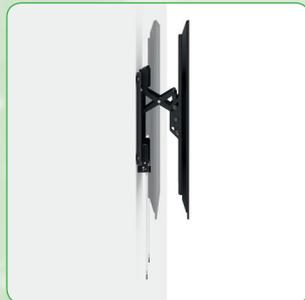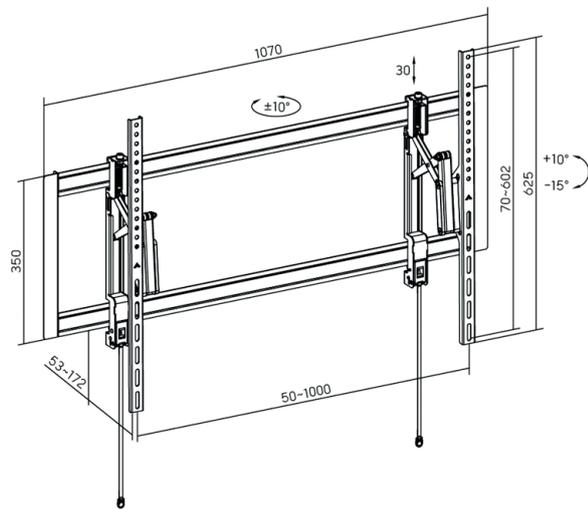

Available July 2026

Order-No. – P.U.


VALUE Wall Mount TV Holder, Heavy-Duty, Extend-Out Tilt, <80 kg, <266,7cm (105"), 1000x600

17.99.1236 – 1

## VALUE Wall Mount TV Holder, Massive Super Heavy-Duty, <125 kg, <355,6cm(140"), 1200x800

Stable TV wall mount with a load capacity up to 125kg and a mount support of maximum VESA 1200x800.

- For screens up to 140" (max. VESA 1200x800)
- Load capacity up to 125kg
- Securing against unintentional loosening of the mounting hooks
- Anti-Theft Locking Hole
- Automatic Spring Locks with Quick Release Cords
- Integrated spirit level
- Material: Steel
- Color: Black
- Dimensions: 62 x 1369 x 826mm (2.4"x53.9"x32.5")
- Fit Screen Size: <140"
- Fits Curved TVs: Yes
- Mounting Hole Pattern: VESA & Universal
- Max. Mounting Hole: 1200x800mm
- Weight Capacity: 125kg
- Profile: 62mm(2.4")
- Tilt Range: +7° ~-7°

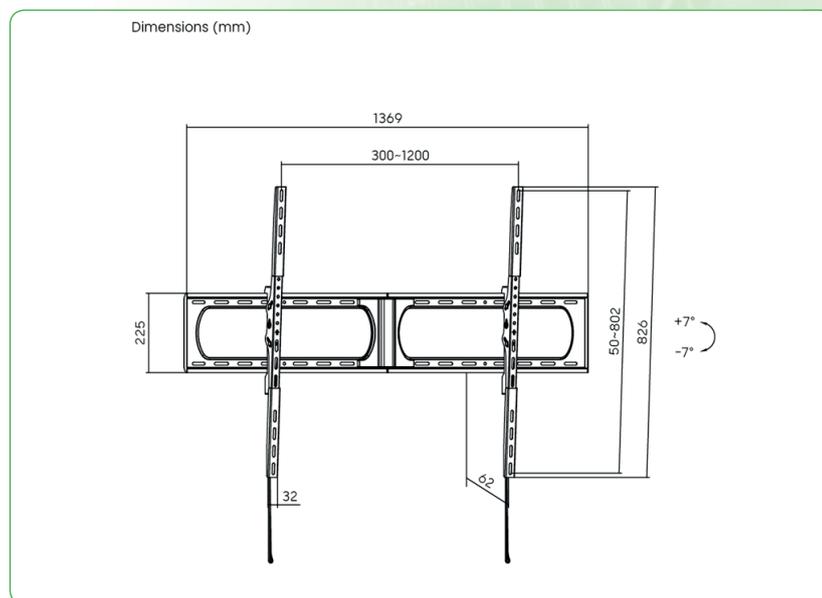

Value®

Available July 2026

Order-No. – P.U.

VALUE Wall Mount TV Holder, Massive Super Heavy-Duty, <125 kg, <355,6cm(140"), 1200x800

17.99.1237 – 2

NEW

# NEWSSHOP – New Products


## STANDARD Pole-Mounted Monitor Arm, Mechanical Spring, < 10kg, < 81,3cm (32")

This STANDARD Pole-Mounted Moitor Arm with mechanical spring supports screens up to 10 kg and up to VESA 100x100!

- Dimensions: 116 x 517 x 733mm
- Fit Screen Size: 17" – 32"
- Max. Load Capacity: 1 – 10 kg
- VESA Compatible: 75x75, 100x100
- Tilt Range: +80° – -45°
- Swivel Range: +90° – -90°
- Screen Rotation: +180° – -180°
- Arm length: 475 mm
- Pole height: 300 mm

- Installation: Clamp, Grommet
- Suggested Desktop Thickness:  
Clamp: 10 – 75mm  
Grommet: 10 – 45mm

- Color: Matte Black
- Fit Curved Monitor: Yes
- Quick Release VESA Plate: No
- Cable Management: Yes
- Contents: Monitor Arm, Installation Instructions

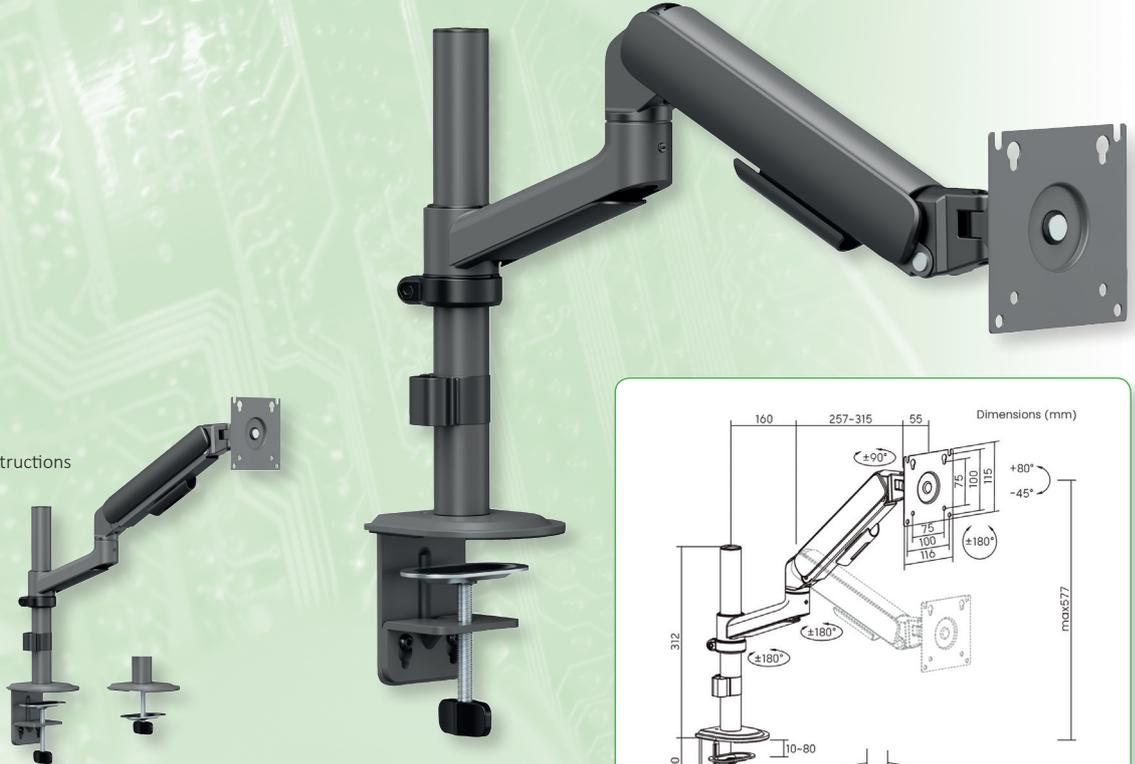

Available July 2026

Order-No. – P.U.

STANDARD Pole-Mounted Monitor Arm, Mechanical Spring, < 10 kg, < 81,3 cm (32"), black 11.55.0000 – 4

## STANDARD Monitor Arm, Mechanical Spring, < 10kg, < 81,3cm (32")


This STANDARD Monitor Arm with mechanical spring supports screens up to 10 kg and up to VESA 100x100!

- Dimensions: 116 x 520 x 576mm
- Fit Screen Size: 17" – 32"
- Max. Load Capacity: 1 – 10 kg
- VESA Compatible: 75x75, 100x100
- Tilt Range: +80° – -45°
- Swivel Range: +90° – -90°
- Screen Rotation: +180° – -180°
- Arm length: 475 mm

- Installation: Clamp, Grommet
- Suggested Desktop Thickness:  
Clamp: 10 – 75mm  
Grommet: 10 – 45mm
- Color: Matte Black
- Fit Curved Monitor: Yes

- Quick Release VESA Plate: No
- Cable Management: Yes

- Contents: Monitor Arm, Installation Instructions

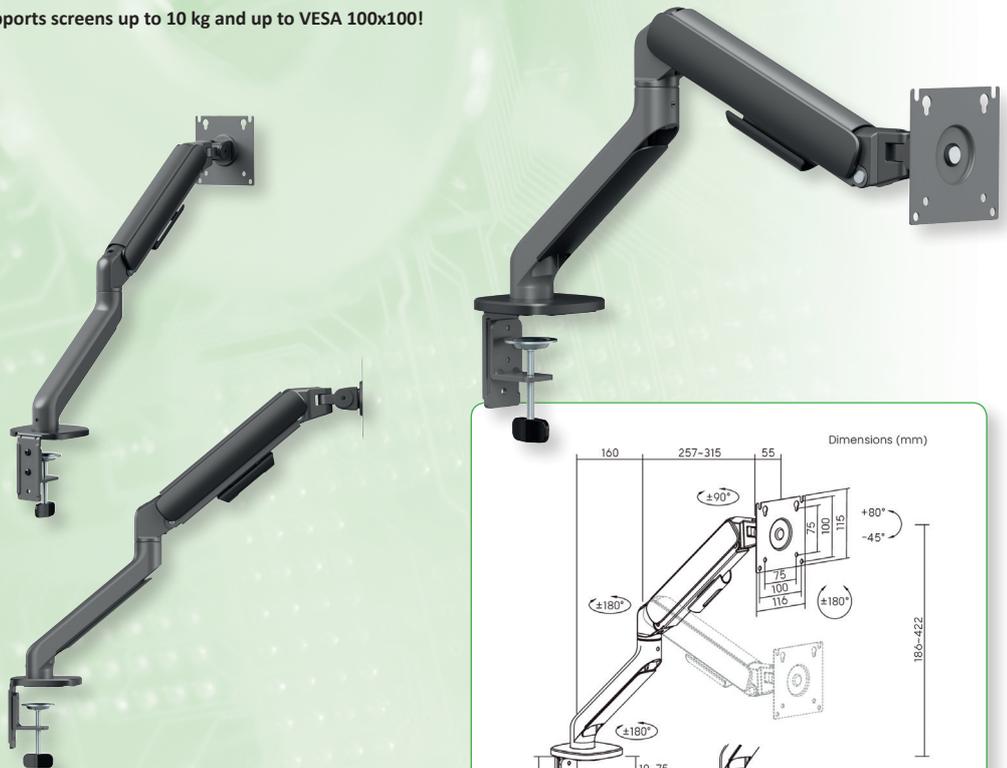

Available July 2026

Order-No. – P.U.

STANDARD Monitor Arm, Mechanical Spring, < 10 kg, < 81,3 cm (32"), black 11.55.0002 – 4

## STANDARD Dual-Screen Monitor Arm, Mechanical Spring, < 2x 10kg, < 81,3cm (32")

This STANDARD Dual-Screen Monitor Arm with mechanical spring supports screens up to 2x 10 kg and up to VESA 100x100!

- Dimensions: 1021 x 109 x 576mm
- Fit Screen Size: 17" – 32"
- Max. Load Capacity: 2x 10 kg
- VESA Compatible: 75x75, 100x100
- Tilt Range: +80° – -45°
- Swivel Range: +90° – -90°
- Screen Rotation: +180° – -180°
- Arm length: 475 mm
- Installation: Clamp, Grommet
- Suggested Desktop Thickness:
  - Clamp: 10 – 75mm
  - Grommet: 10 – 45mm
- Color: Matte Black
- Fit Curved Monitor: Yes
- Quick Release VESA Plate: No

Cable Management: Yes


- Contents: Monitor Arm, Installation Instructions



Available July 2026



Dimensions (mm)

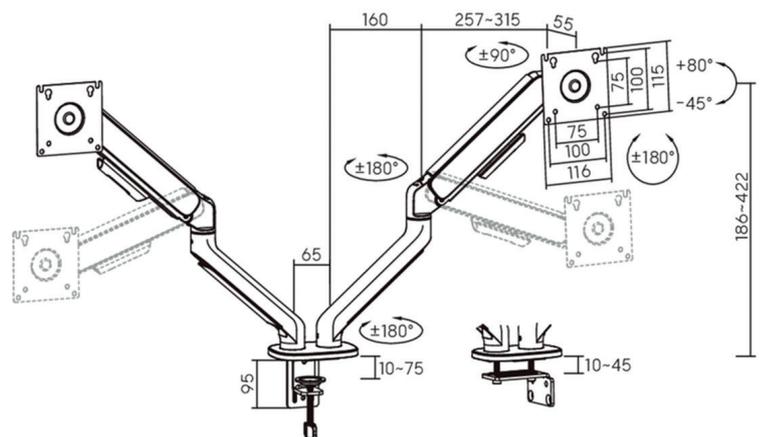

Order-No. – P.U.


STANDARD Dual-Screen Monitor Arm, Mechanical Spring, <2x 10 kg, < 81,3 cm (32"), black

11.55.0001 – 2

## VALUE POCKET Travel Charger, EU/UK/US, 2x Ports (A+C), 25W

2-port USB pocket traveller charger, 1x Type C + 1x QC3.0 with maximum 25W for the power supply (smartphones, tablets) of several devices simultaneously. Suitable for travel to the EU/UK/US.

- For charging of mobile devices (tablets / smartphones)
- Quick Charge 3.0 / Type C (PD) supported
- Multi-Protection: Over Current / Short Circuit / Over Voltage / Overheat Protection
- Compact Design
- Input: 100- 240 V AC, 50- 60 Hz
- Output USB-C:
  - 3.3-11V 2.25A (PPS)
  - 5V 3A, 9V 2.77A, 12V 2.08A (25W)
- Output USB-A: 5V 3A, 9V 2.22A, 12V 1.67A (20W)
- Total output: max. 25W
- Dimensions / Size: 70.0 x 42.0 x 25.4mm

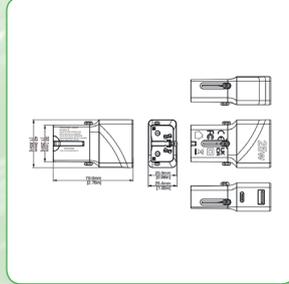

**Value**<sup>®</sup>

Order-No. – P.U.

VALUE POCKET Travel Charger, EU/UK/US, 2x Ports (A+C), 25W, white


19.99.1113 – 10

Available July 2026

## VALUE POCKET Travel Charger, EU/UK/US, 2x Ports USB C, 45W

2-port USB pocket traveller charger, 2x Type C with maximum 45W for the power supply (smartphones, tablets) of several devices simultaneously. Suitable for travel to the EU/UK/US.

- For charging of mobile devices (tablets / smartphones)
- 2x USB Ports Type C (PD) supported
- Multi-Protection: Over Current / Short Circuit / Over Voltage / Overheat Protection
- Compact Design
- Input: 100- 240 V AC, 50- 60 Hz
- Output USB-C1/C2:
  - 5-21V 2.0A (PPS)
  - 5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 2.25A (45W Max)
- Output USB-C1+C2: 25W+20W
- Total output: max. 45W
- Dimensions / Size: 79.7 x 46 x 27mm

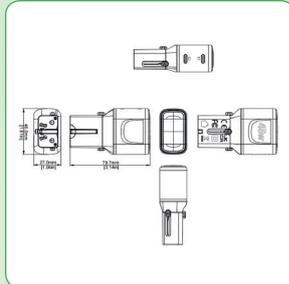

**Value**<sup>®</sup>

Order-No. – P.U.

VALUE POCKET Travel Charger, EU/UK/US, 2x Ports USB C, 45W, white

19.99.1114 – 10

Available July 2026

Your Distributor

**roline**<sup>®</sup> **roline**<sup>®</sup>  
Designed for Professionals **green**

**roline**<sup>®</sup> GOLD

**roline**<sup>®</sup>   
recycled material

**Value**<sup>®</sup>