


9000 + 100/-0mm

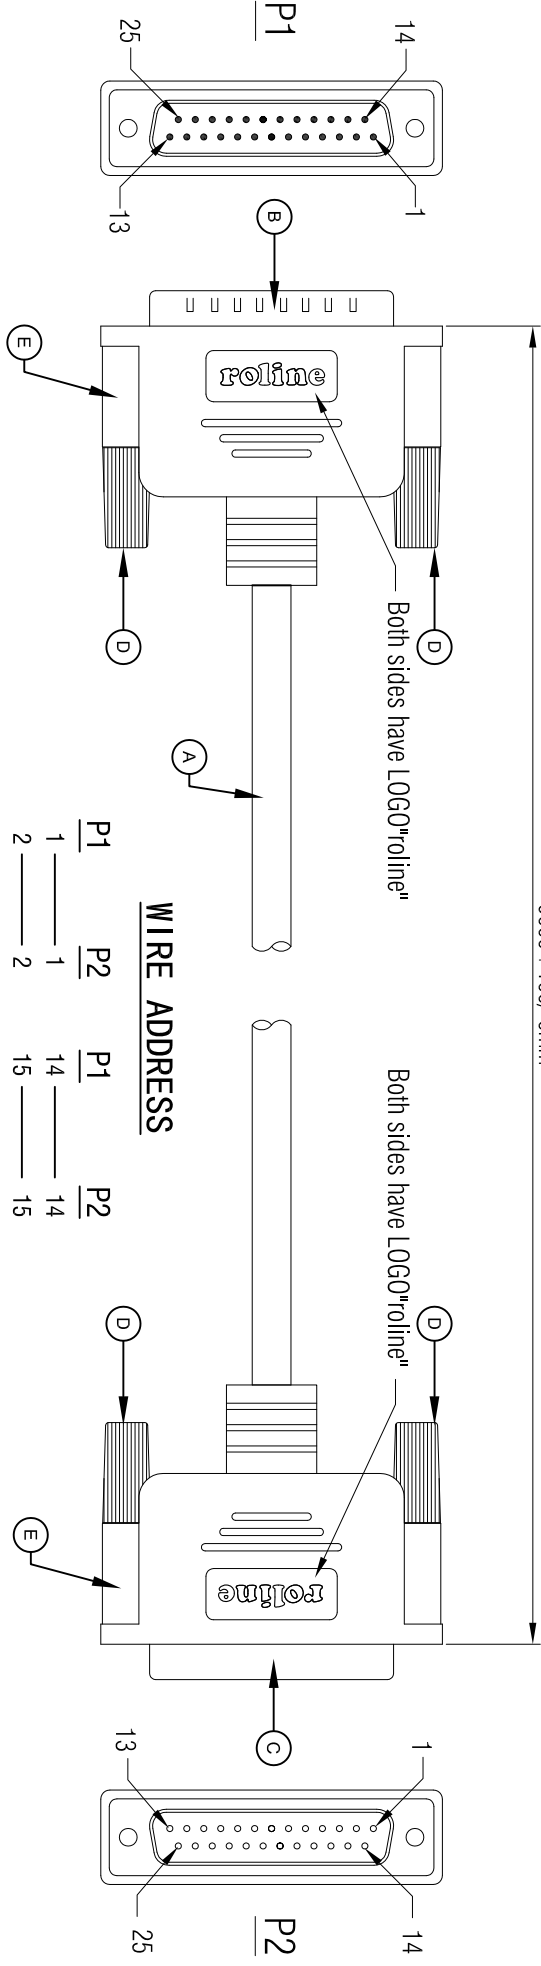

WIRE ADDRESS

P1	P2	P1	P2
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	Shell	Shell

Electrical Test:
 1. 100% TEST OPEN SHORT MIS-WIRE.
 2. CONTACT RESISTANCE:5Ω MAX.
 3. INSULATION RESISTANCE:5MΩ MIN.
 4. HI-POT:300V DC/10MS.

E		45P PVC BEIGE		G	
D		Screw:#4-40UNC(Nickel Plated,Beige)		PCS	
C		DB 25P FEMALE(Blue Insulator, Nickel Plated)		PCS	
B		DB 25P MALE(Blue Insulator, Nickel Plated)		PCS	
A		NON-UL 30AWG*25G+AD.OD=7.0mm BEIGE PVC JACKET.		PCS	
NUMBER		PRODUCT SPECIFICATIONS		Quantity Unit	
1		2		4	
F		ROLINE RS-232 Cable, DB25 M - F, 9.0m		Item 11.01.3690	
		Approval <i>Miche</i>		Date: 2020.03.04	
		Duty F16		BOM.NO:13895	
		Sample NO.		Drawings of 1 (2) Proportion: 1:1 Unit(mm) A4	

