


RoHS Compliant

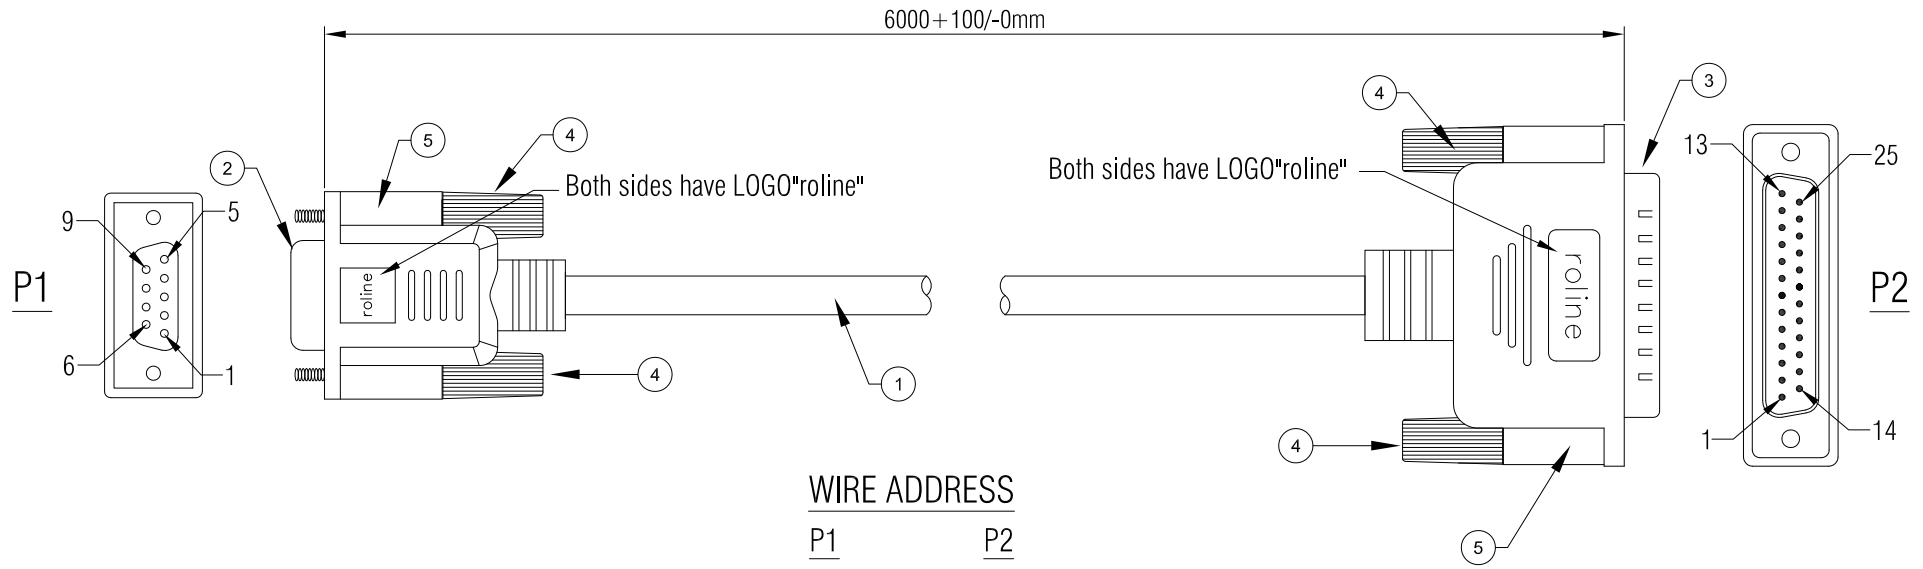

WIRE ADDRESS

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shell	Shell

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:5Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

NUMBER	BOM.NO	PRODUCT SPECIFICATIONS	Quantity	Unit
5		45P PVC BEIGE		G
4		Screw:#4-40UNC 2.3*44mm(Beige)	4	PCS
3		DB 25P MALE(Black Insulator, Nickel Plated)	1	PCS
2		DB 9P FEMALE(Black Insulator, Nickel Plated)	1	PCS
1		NON-UL 30AWG*9C(BC)+AE,OD=5.0mm BEIGE PVC JACKET.	1	PCS

ROLINE Modem Cable, DB9 F - DB25 M, 6 m		
Item	11.01.4560	
Draw	Sam	Date: 2022.07.27
Approval		
Duty	F16	BOM.NO:

SECOMP