


RoHS Compliant

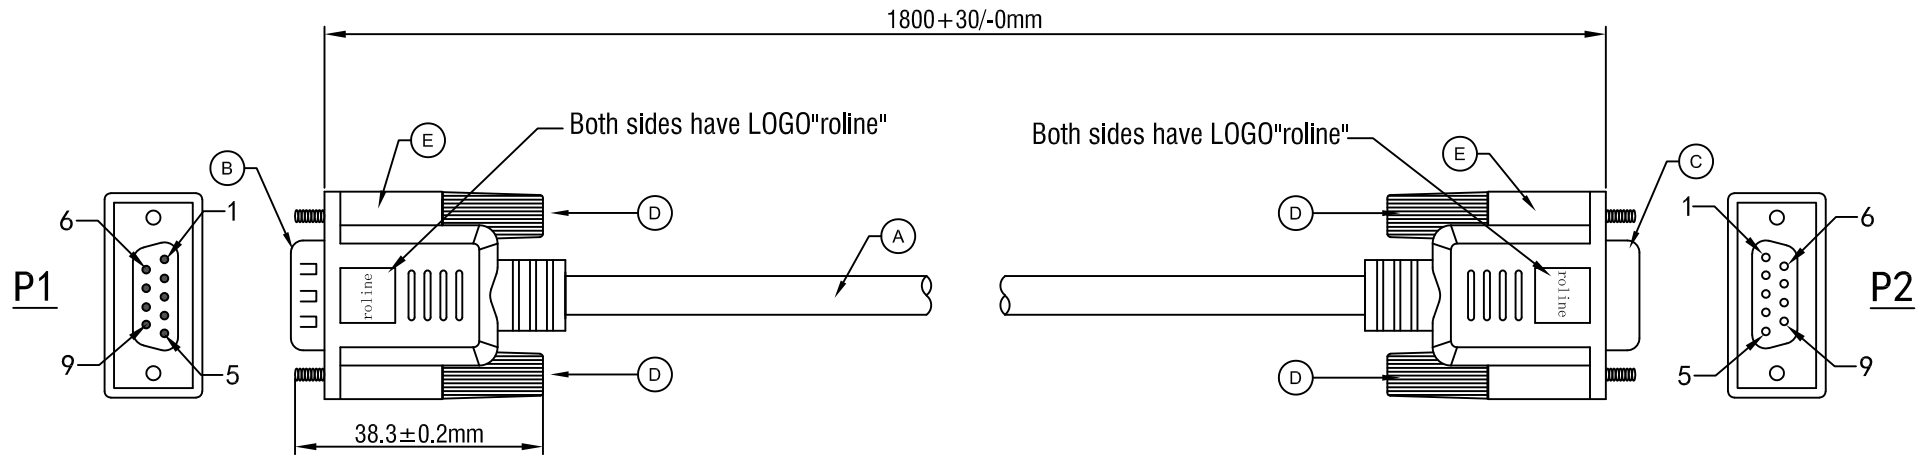

WIRE ADDRESS

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
Shell	Shell

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

E	45P PVC BEIGE		G
D	Screw:#4-40UNC 2.3*38.3mm(BEIGE MOLD NICKEL PLATED)	4	PCS
C	DB 9P FEMALE(Black Insulator, Nickel Plated,PIN Gold Plated 1U")	1	PCS
B	DB 9P MALE(Black Insulator, Nickel Plated,PIN Gold Plated 1U")	1	PCS
A	NON-UL 30AWG*9C(BC)+AL-foil+Drain ,OD=5.0mm BEIGE PVC JACKET.	1	PCS
NUMBER	BOM.NO	PRODUCT SPECIFICATIONS	Quantity Unit

ROLINE RS232 Cable, DB9 M - F, 1.8 m							
Item	11.01.6218						
Draw	Sam	Date: 2014.12.03					
Approval							
Duty	F16	BOM.NO: 10123					
Sample NO.			Drawings of 1 (2)	Proportion: 1:1	Unit(mm)		A4