


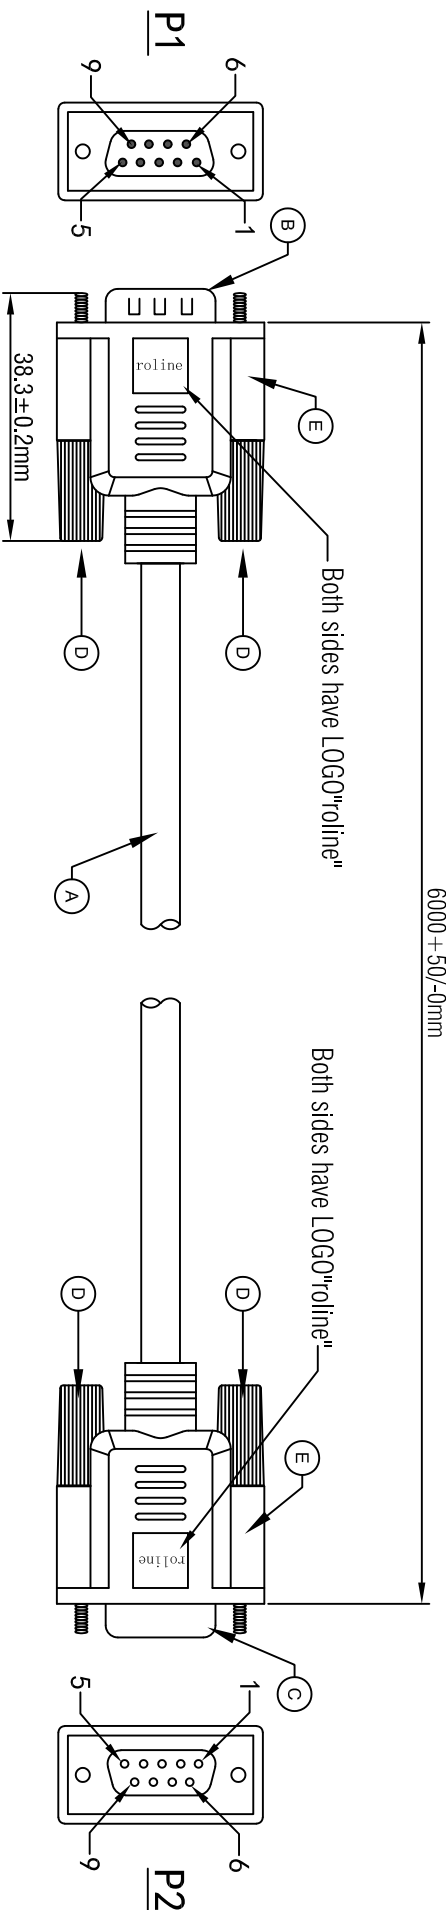

WIRE ADDRESS

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
Shell	Shell

- Electrical Test:
- 1. 100% TEST OPEN SHORT MIS-WIRE.
 - 2. CONTACT RESISTANCE:3Ω MAX.
 - 3. INSULATION RESISTANCE:5MΩ MIN.
 - 4. HI-POT:300V DC/10MS.

E	45P PVC BEIGE			6	ROLINE RS232 Cable, DB9 M - F, 6 m	SECOMP						
D	Screw:#4-40UNC 2.3*38.3mm(BEIGE MOLD NICKEL PLATED)	4		PCS								
C	DB 9P FEMALE(Black Insulator, Nickel Plated,PIN Gold Plated)	1		PCS								
B	DB 9P MALE(Black Insulator, Nickel Plated,PIN Gold Plated)	1		PCS								
A	NON-UL 30AWG*9C(BG) +AE,OD=5.0mm BEIGE PVC JACKET.	1		PCS								
NUMBER		PRODUCT SPECIFICATIONS			Quantity	Unit						
1	2	4			Sample NO.							
					Duty	F16	BOM.NO: 10125	Drawings of 1 (2)	Proportion: 1:1	Unit(mm)		A4