

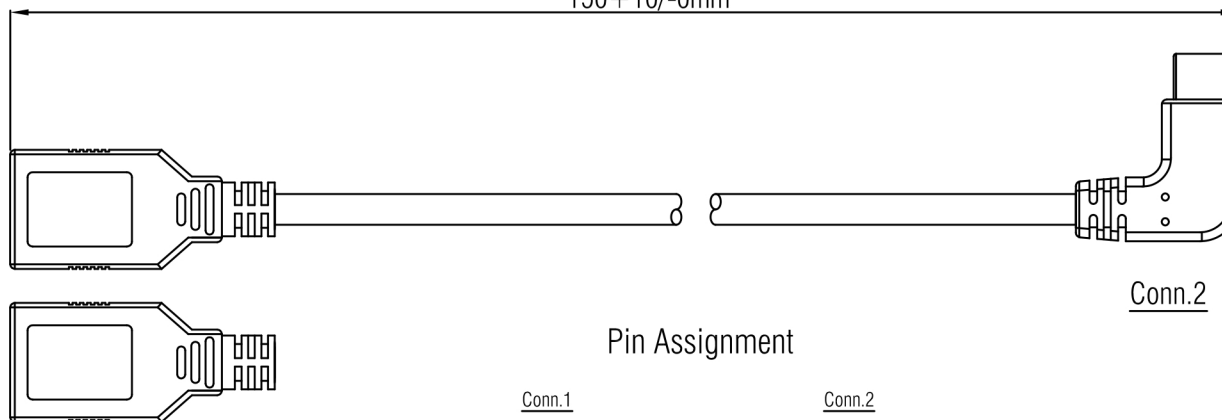


RoHS Compliant



Pin Assignment

Conn.1		Conn.2
4	DRAIN (SDP1+SDP2)DRAIN	A1 B1 A12 B12
7		A5
1	RED	A4 B4 A9 B9
3	GREEN	A6
2	WHITE	A7
9	BLUE	A2
8	BLACK	A3
6	ORANGE	B11
5	BROWN	B10

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.
5.SUPPORT USB 3.2 Gen 1 5Gbps.

D		
C		
B		
VER.A	REVISE	DATE

4	45P PVC BLACK		G
3	USB 3.0 TYPE C MALE(Black Insulator, Nickel Plated)	1	PCS
2	USB 3.0 A FEMALE(Blue Insulator, Nickel Plated)	1	PCS
1	UL20276,(32#*1P+EAM)*2+30#*1P+24#*2C+AEB,OD=4.5,BLACK PVC JACKET.	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

USB A - C(angled), F/M, 15cm			
Item	11.02.9031		
Draw	Hebe	Date: 2018.01.26	
Approval			
Duty	F16		